
ISFIT®

板对线/板对板用4点接触式Press-Fit构造端子


Product Specifications:


The court of the c	
Operating Temperature	-40 - 125°C
Material	-40 - 85°C: NB109-EH Reflow Sn plating (0.8-1.5 μm)
	-40 - 125°C : C7025-TM02 Reflow Sn (0.8-1.5 μm)
Through-hole Size	Φ 1.00 ± 0.05 mm,
	Φ 1.20 ± 0.05 mm,
	Φ 1.60 ± 0.05 mm
	(Cu plating 25 μ m or thicker)
Vibration Resistance	20 G (depends on insertion condition to PCB)
Current Rating	5A (depends on size of terminal)

本页中所示的照片,图纸为ISFIT端子的实际应用案例之一。 我们可以根据贵司要求,提供定制化的端子产品。<u>具体需求请联络我们</u>。

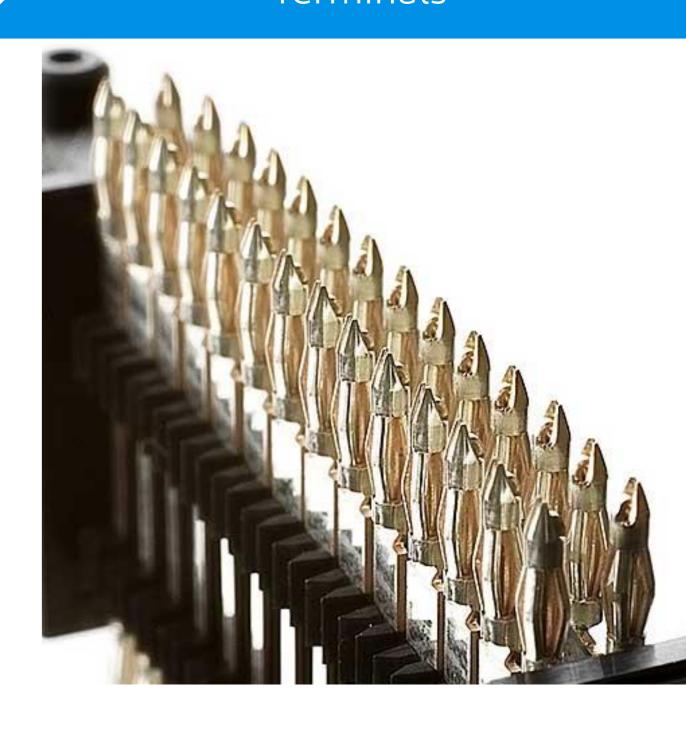

独特的4点接触结构

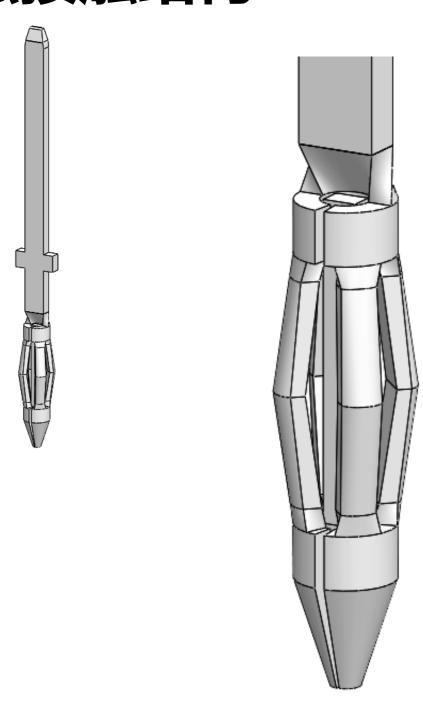

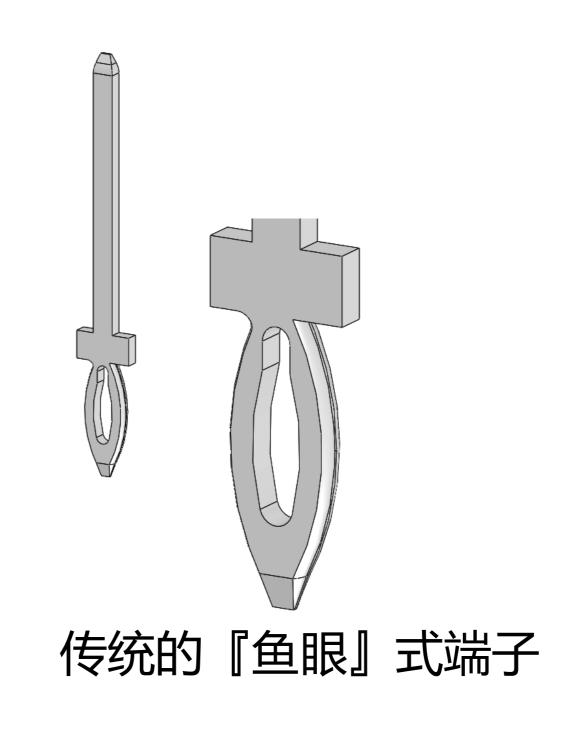


减少对于PCB的损伤

插入后,对于通孔损伤情况比较



通孔种自动居中性能

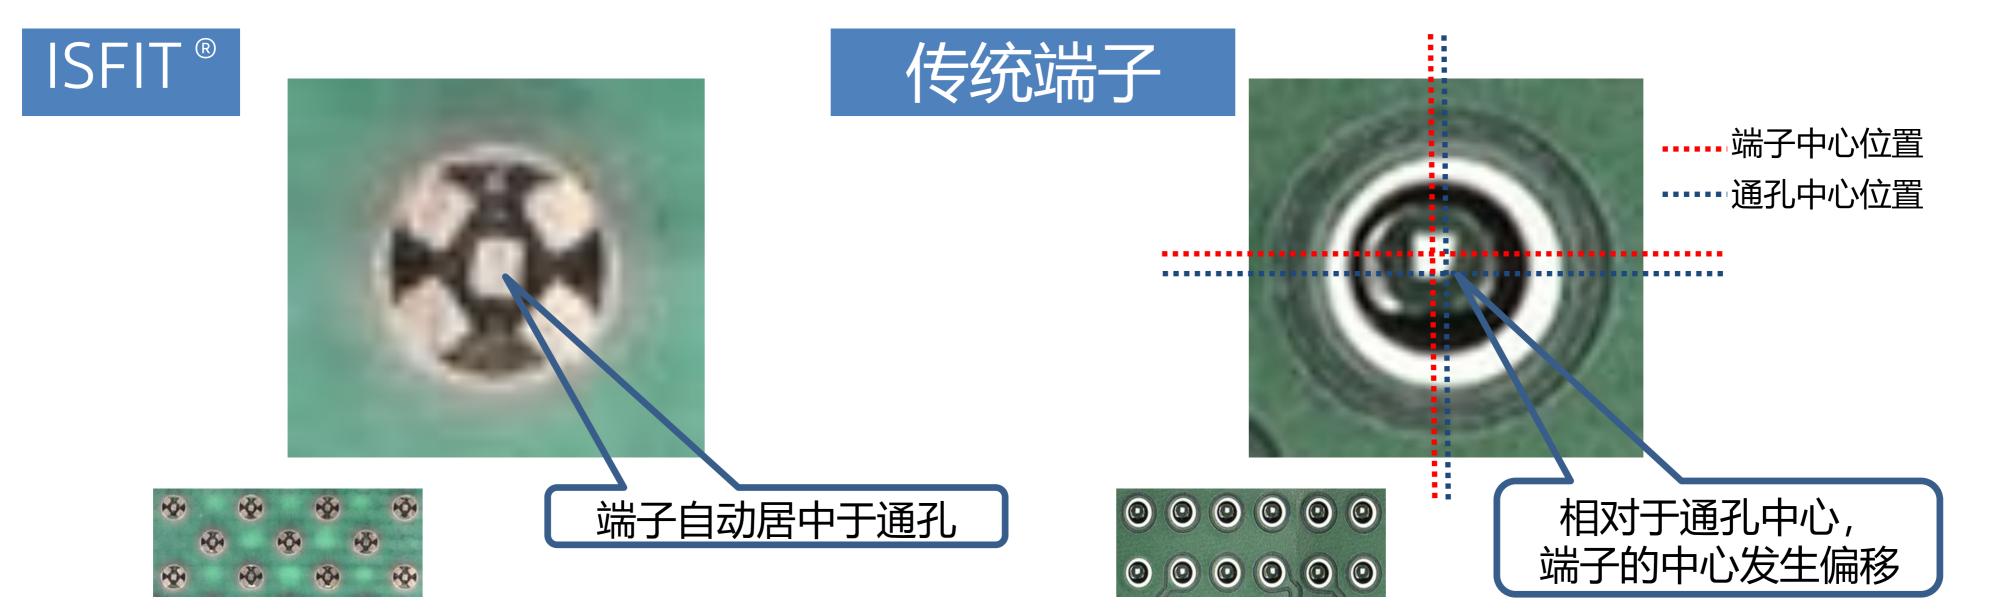


Custom Products Available







LIGHTPASS® series

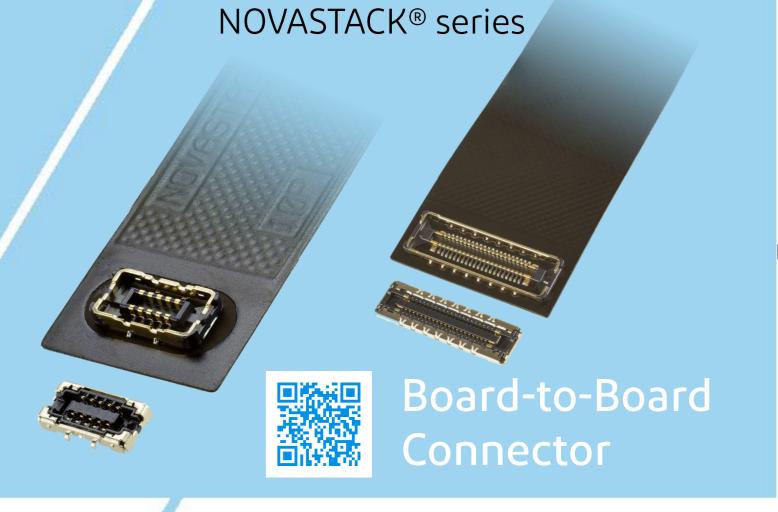

EVAFLEX® series





FPC FFC Connector

MINIFLEX® series





I-PEX, MHF, CABLINE, LIGHTPASS, NOVASTACK, ISH, IARPB, MINIFLEX, EVAFLEX, MINIDOCKS and ZenShield are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update Information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation,

> Contact your sales representative or more detailed information. www.i-pex.com

medical equipment, safety equipment etc.).



© I-PEX Inc. 2024 All rights reserved