
# **ISFIT®**

線對板/板對板4點彈性式接觸獨特壓合端子結構設計


### Product Specifications:

Product Specifications.	
-40 - 125°C	
-40 - 85°C: NB109-EH Reflow Sn plating (0.8-1.5 μm)	
-40 - 125°C : C7025-TM02 Reflow Sn (0.8-1.5 µm)	
$\Phi$ 1.00 $\pm$ 0.05 mm,	
$\Phi$ 1.20 $\pm$ 0.05 mm,	
$\Phi$ 1.60 ± 0.05 mm	
(Cu plating 25 $\mu$ m or thicker)	
20 G (depends on insertion condition to PCB)	
5A (depends on size of terminal)	

本頁中顯示的圖片與圖面為帶有ISFIT 端子組裝連接器的範例參考 可針對客戶實際需求的規格做ISFIT 端子的客製化對應,<u>歡迎隨時與我司負責業務接洽聯繫</u>

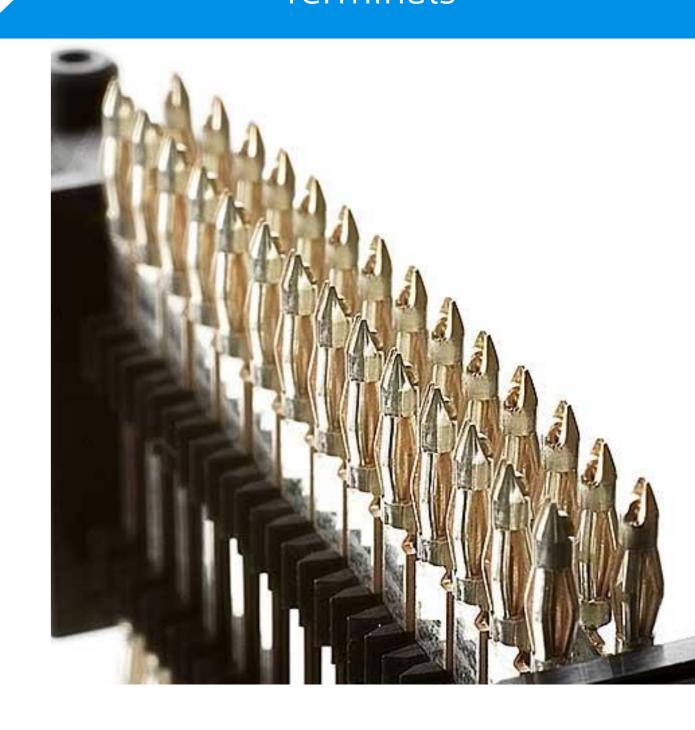


### 特有4點彈性式接觸端子設計

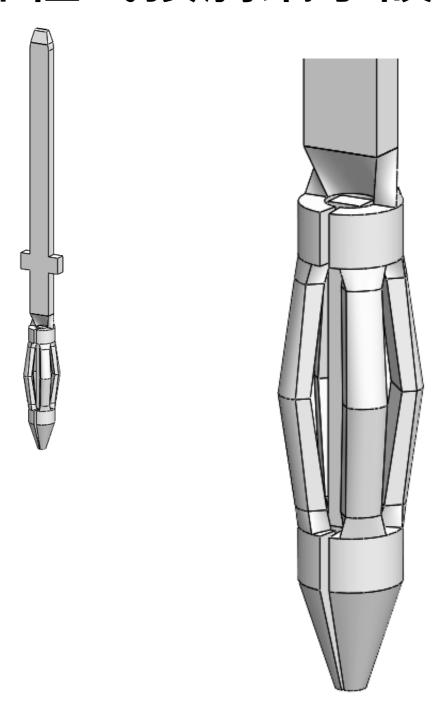





## > 減輕對PCB板的損傷

# O.O1mm



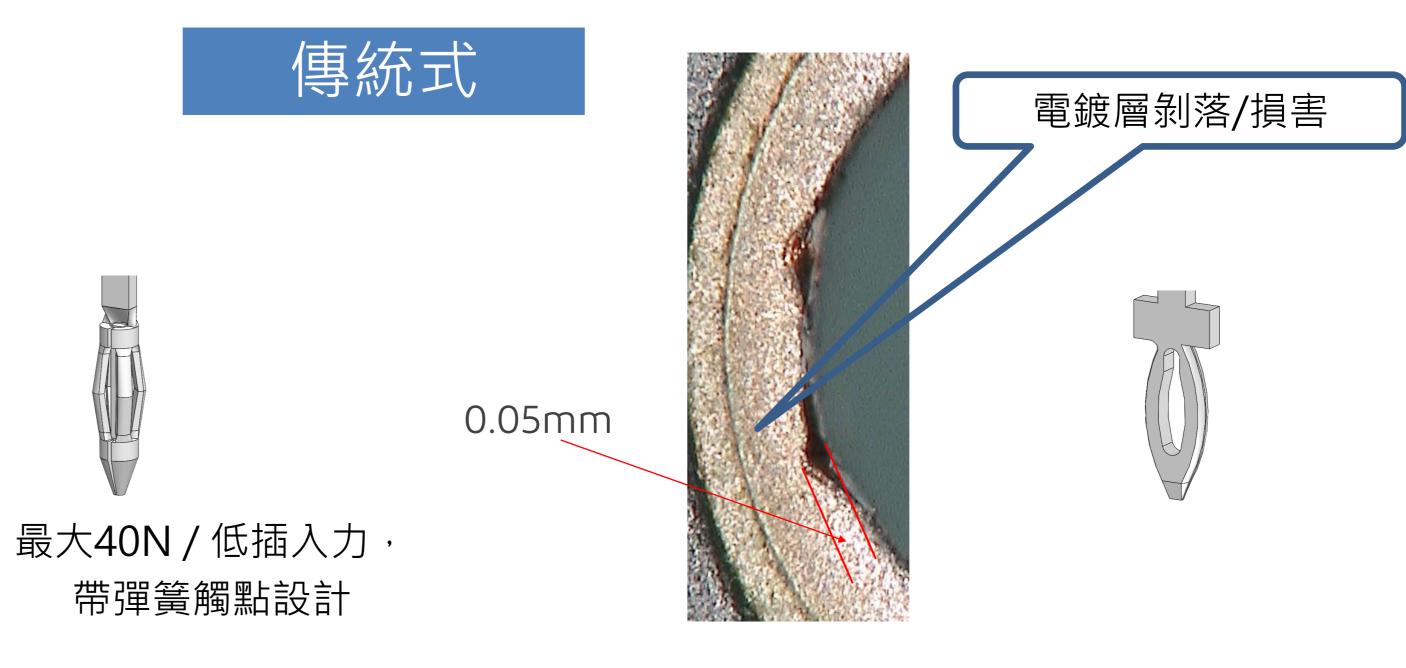

### 通孔對位校正

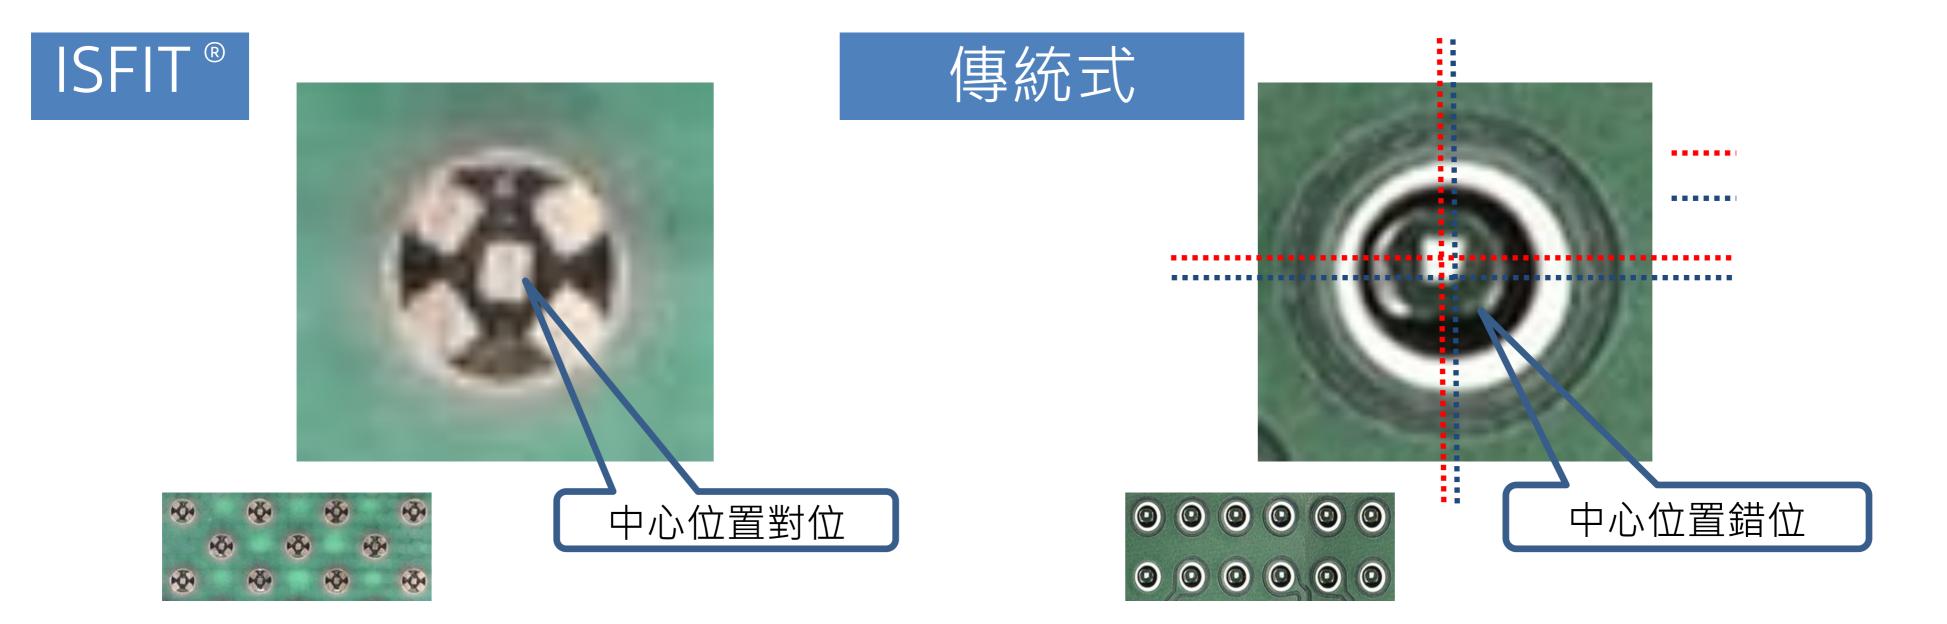


Custom Products Available







LIGHTPASS® series

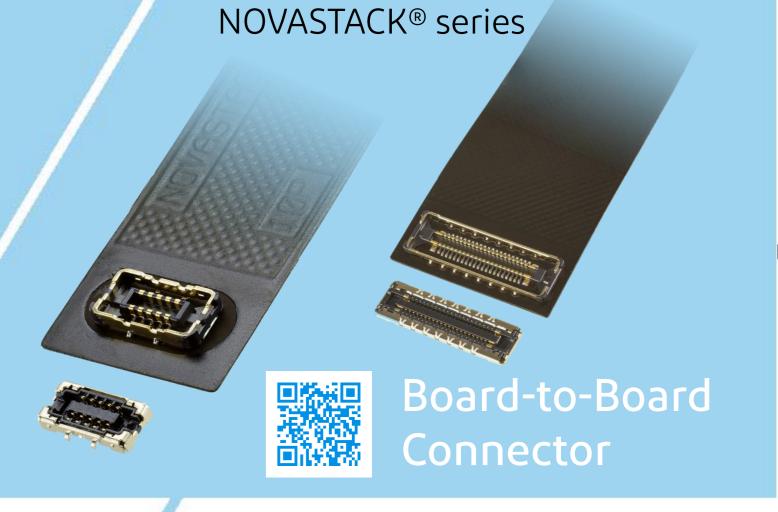

EVAFLEX® series





**FPC FFC** Connector

MINIFLEX® series





I-PEX, MHF, CABLINE, LIGHTPASS, NOVASTACK, ISH, IARPB, MINIFLEX, EVAFLEX, MINIDOCKS and ZenShield are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update Information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation,

> Contact your sales representative or more detailed information. www.i-pex.com

medical equipment, safety equipment etc.).



© I-PEX Inc. 2024 All rights reserved