

MHF® 4L LK

鎖扣設計，適用於所有 MHF® 4/4L 類型的母座，組合高度 2.0 mm max.

Product Specifications:

Mated Height (mm max.)	2.0		
Rece. SMT Size (mm)	2.0 x 2.0		
Applicable Frequency	DC ~ 12 GHz		
Characteristic Impedance	50 ohm		
VSWR (L=100 mm)	Connector	PLUG	RECEPTACLE (MHF® 4L)
	DC ~ 3 GHz	1.3 max.	1.3 max.
	3 ~ 6 GHz	1.4 max.	1.4 max.
	6 ~ 9 GHz	1.5 max.	1.5 max.
	9 ~ 12 GHz	1.6 max.	1.65 max.

Applicable Cable Size:


1.37 mm / AWG 30

Applicable Standards (Reference Only):


5G sub-6, Wi-Fi 6E, LTE/LTE-Advanced, LPWA, Bluetooth, GPS
--




連續衝擊和震動的理想解決方案

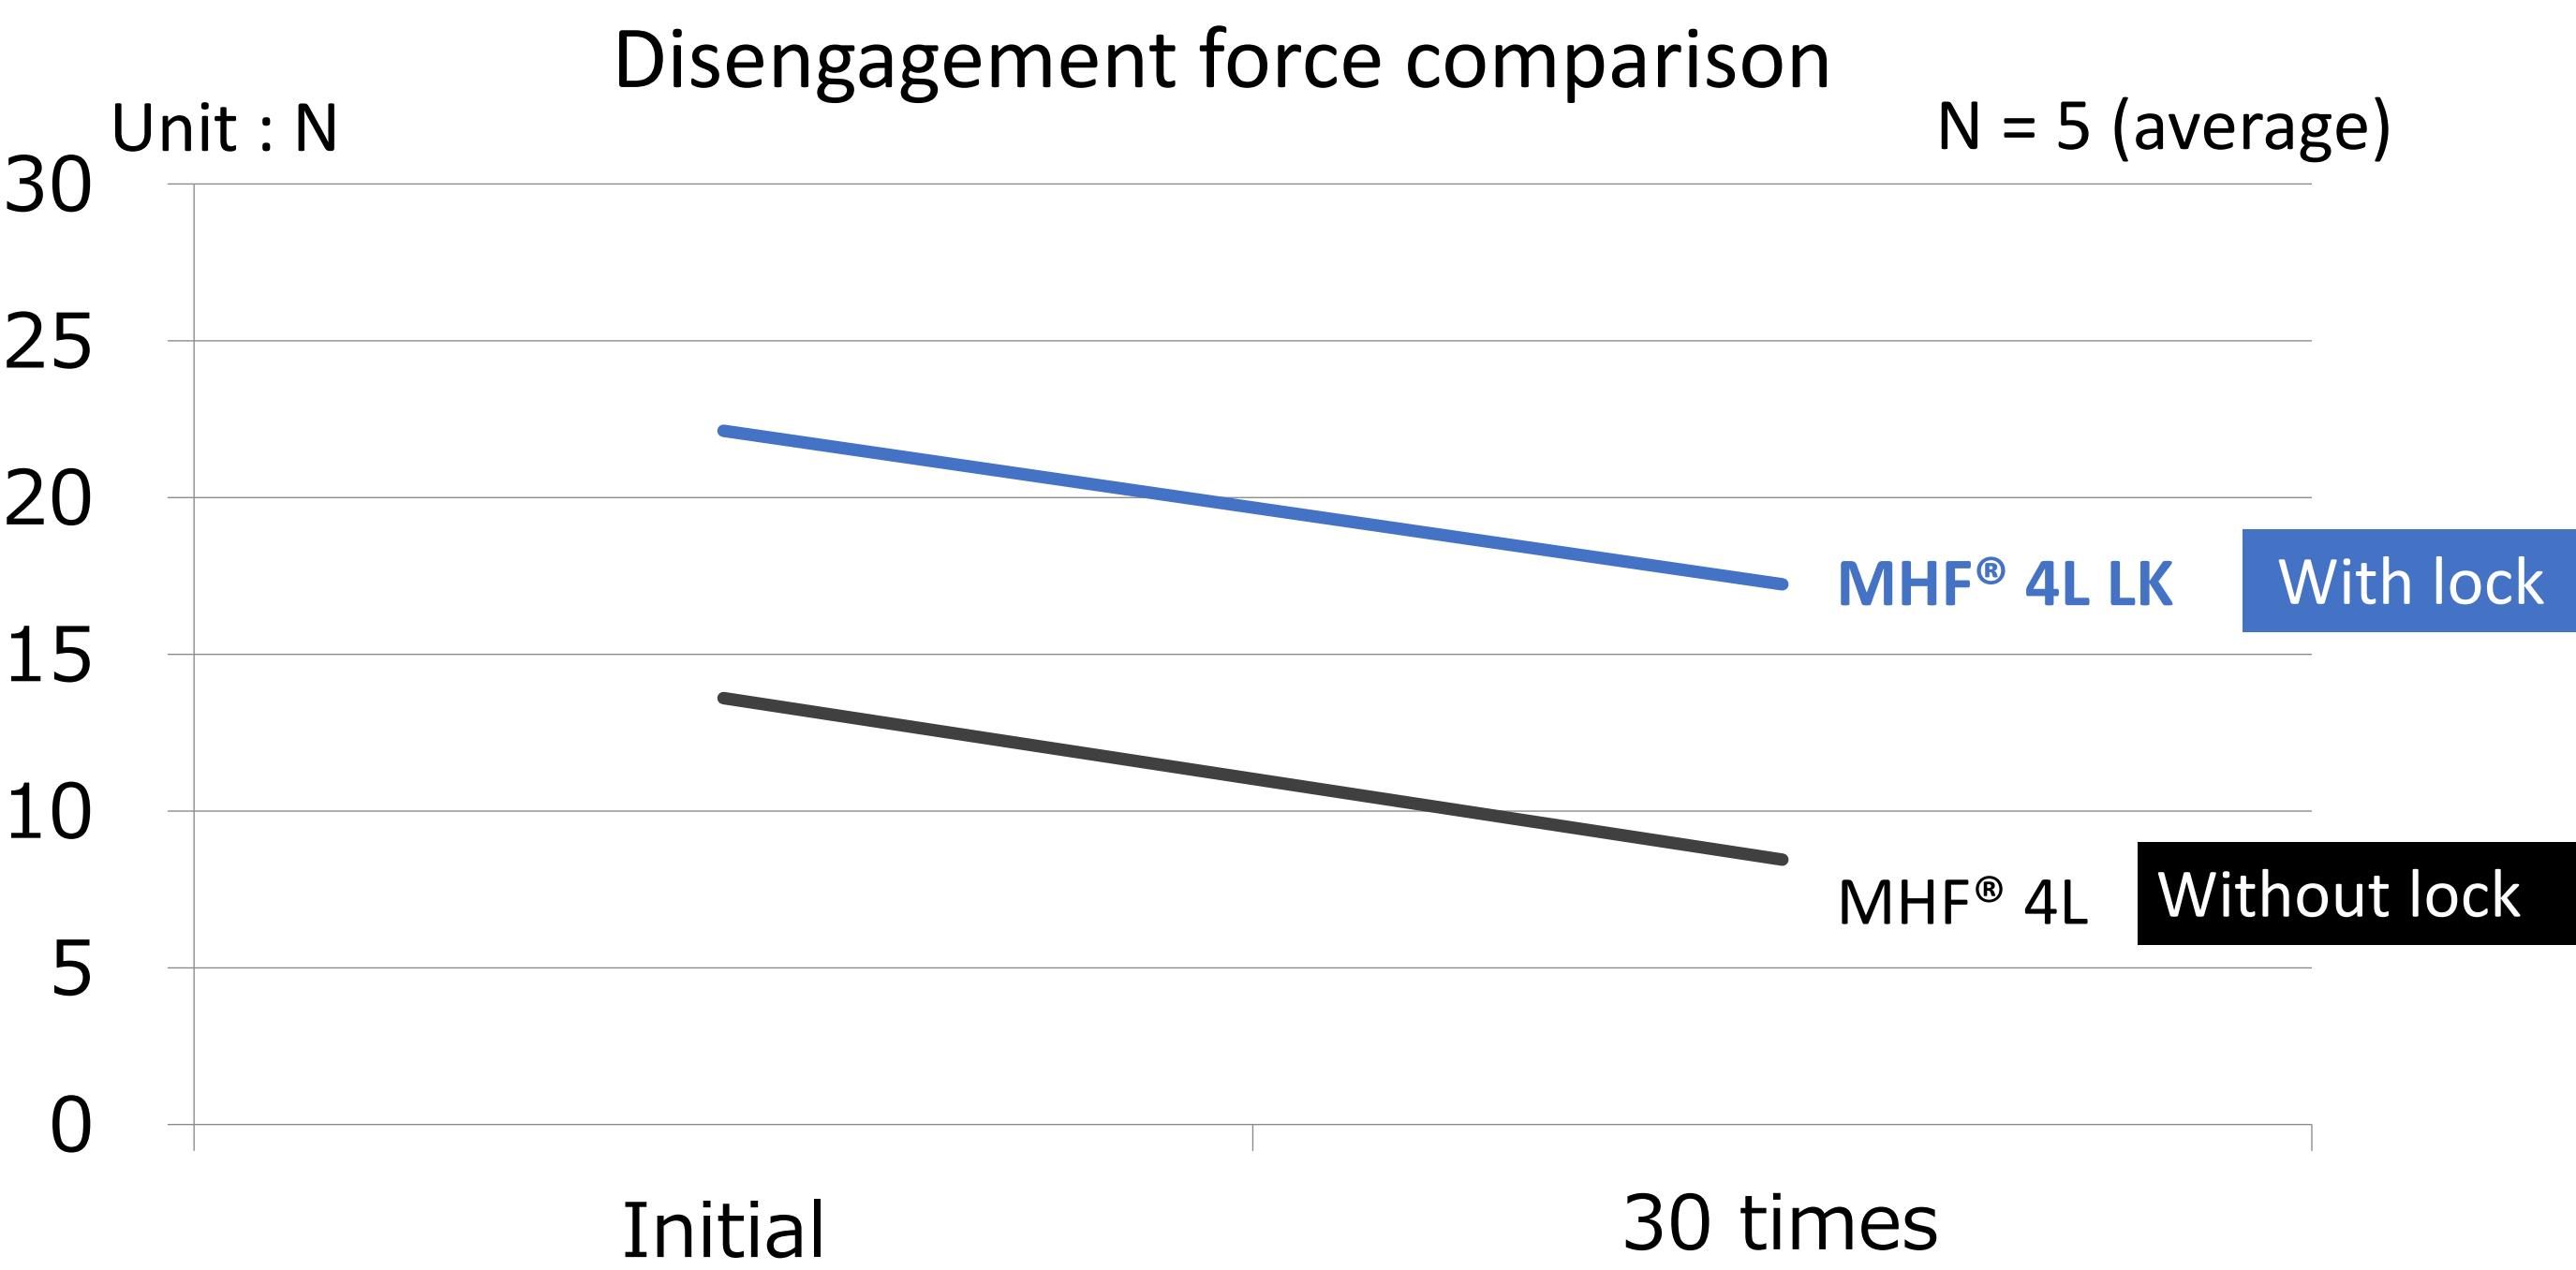

MHF® 4L 公座自帶鎖扣結構

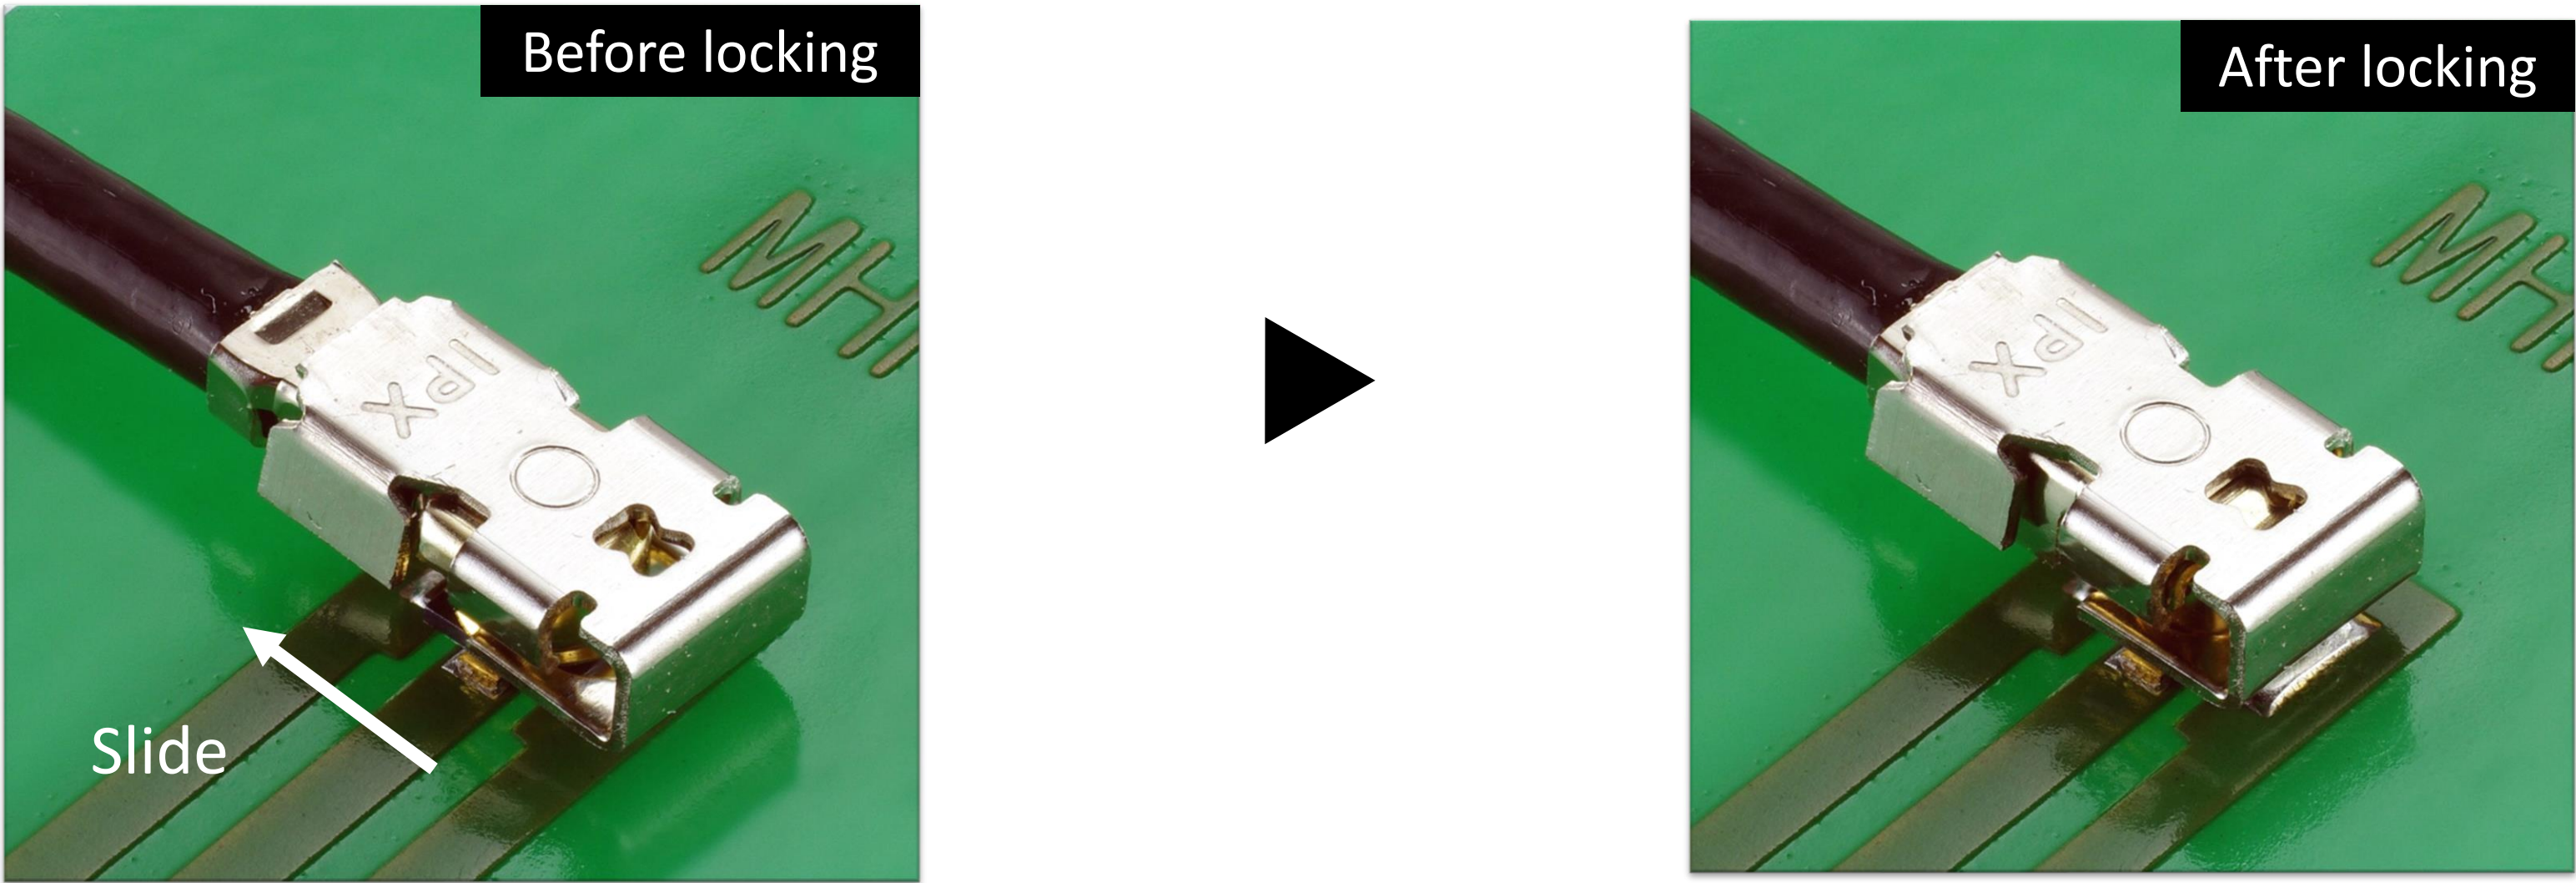


可匹配所有 MHF® 4 / 4L母座

					
Product name		MHF® 4L LK	MHF® 4L	MHF® 4L	MHF® 4L
Lock		With Lock	Without Lock	Without Lock	Without Lock
Mating Height		2.0 mm max.	1.7 mm max.	1.4 mm max.	1.2 mm max.
Coaxial O.D. (Center Conductor AWG)	1.37 mm (AWG#30)	●	●		
	1.13 mm (AWG#32)			●	
	0.95 mm (AWG#33)			●	
	0.81 mm (AWG#36)				●
	0.64 mm (AWG#36)				●
Receptacle		MHF® 4 receptacle (20449-001E-**) , MHF® 4L receptacle (20579-001E)			




Component Parts Details


MHF[®] 4L LK

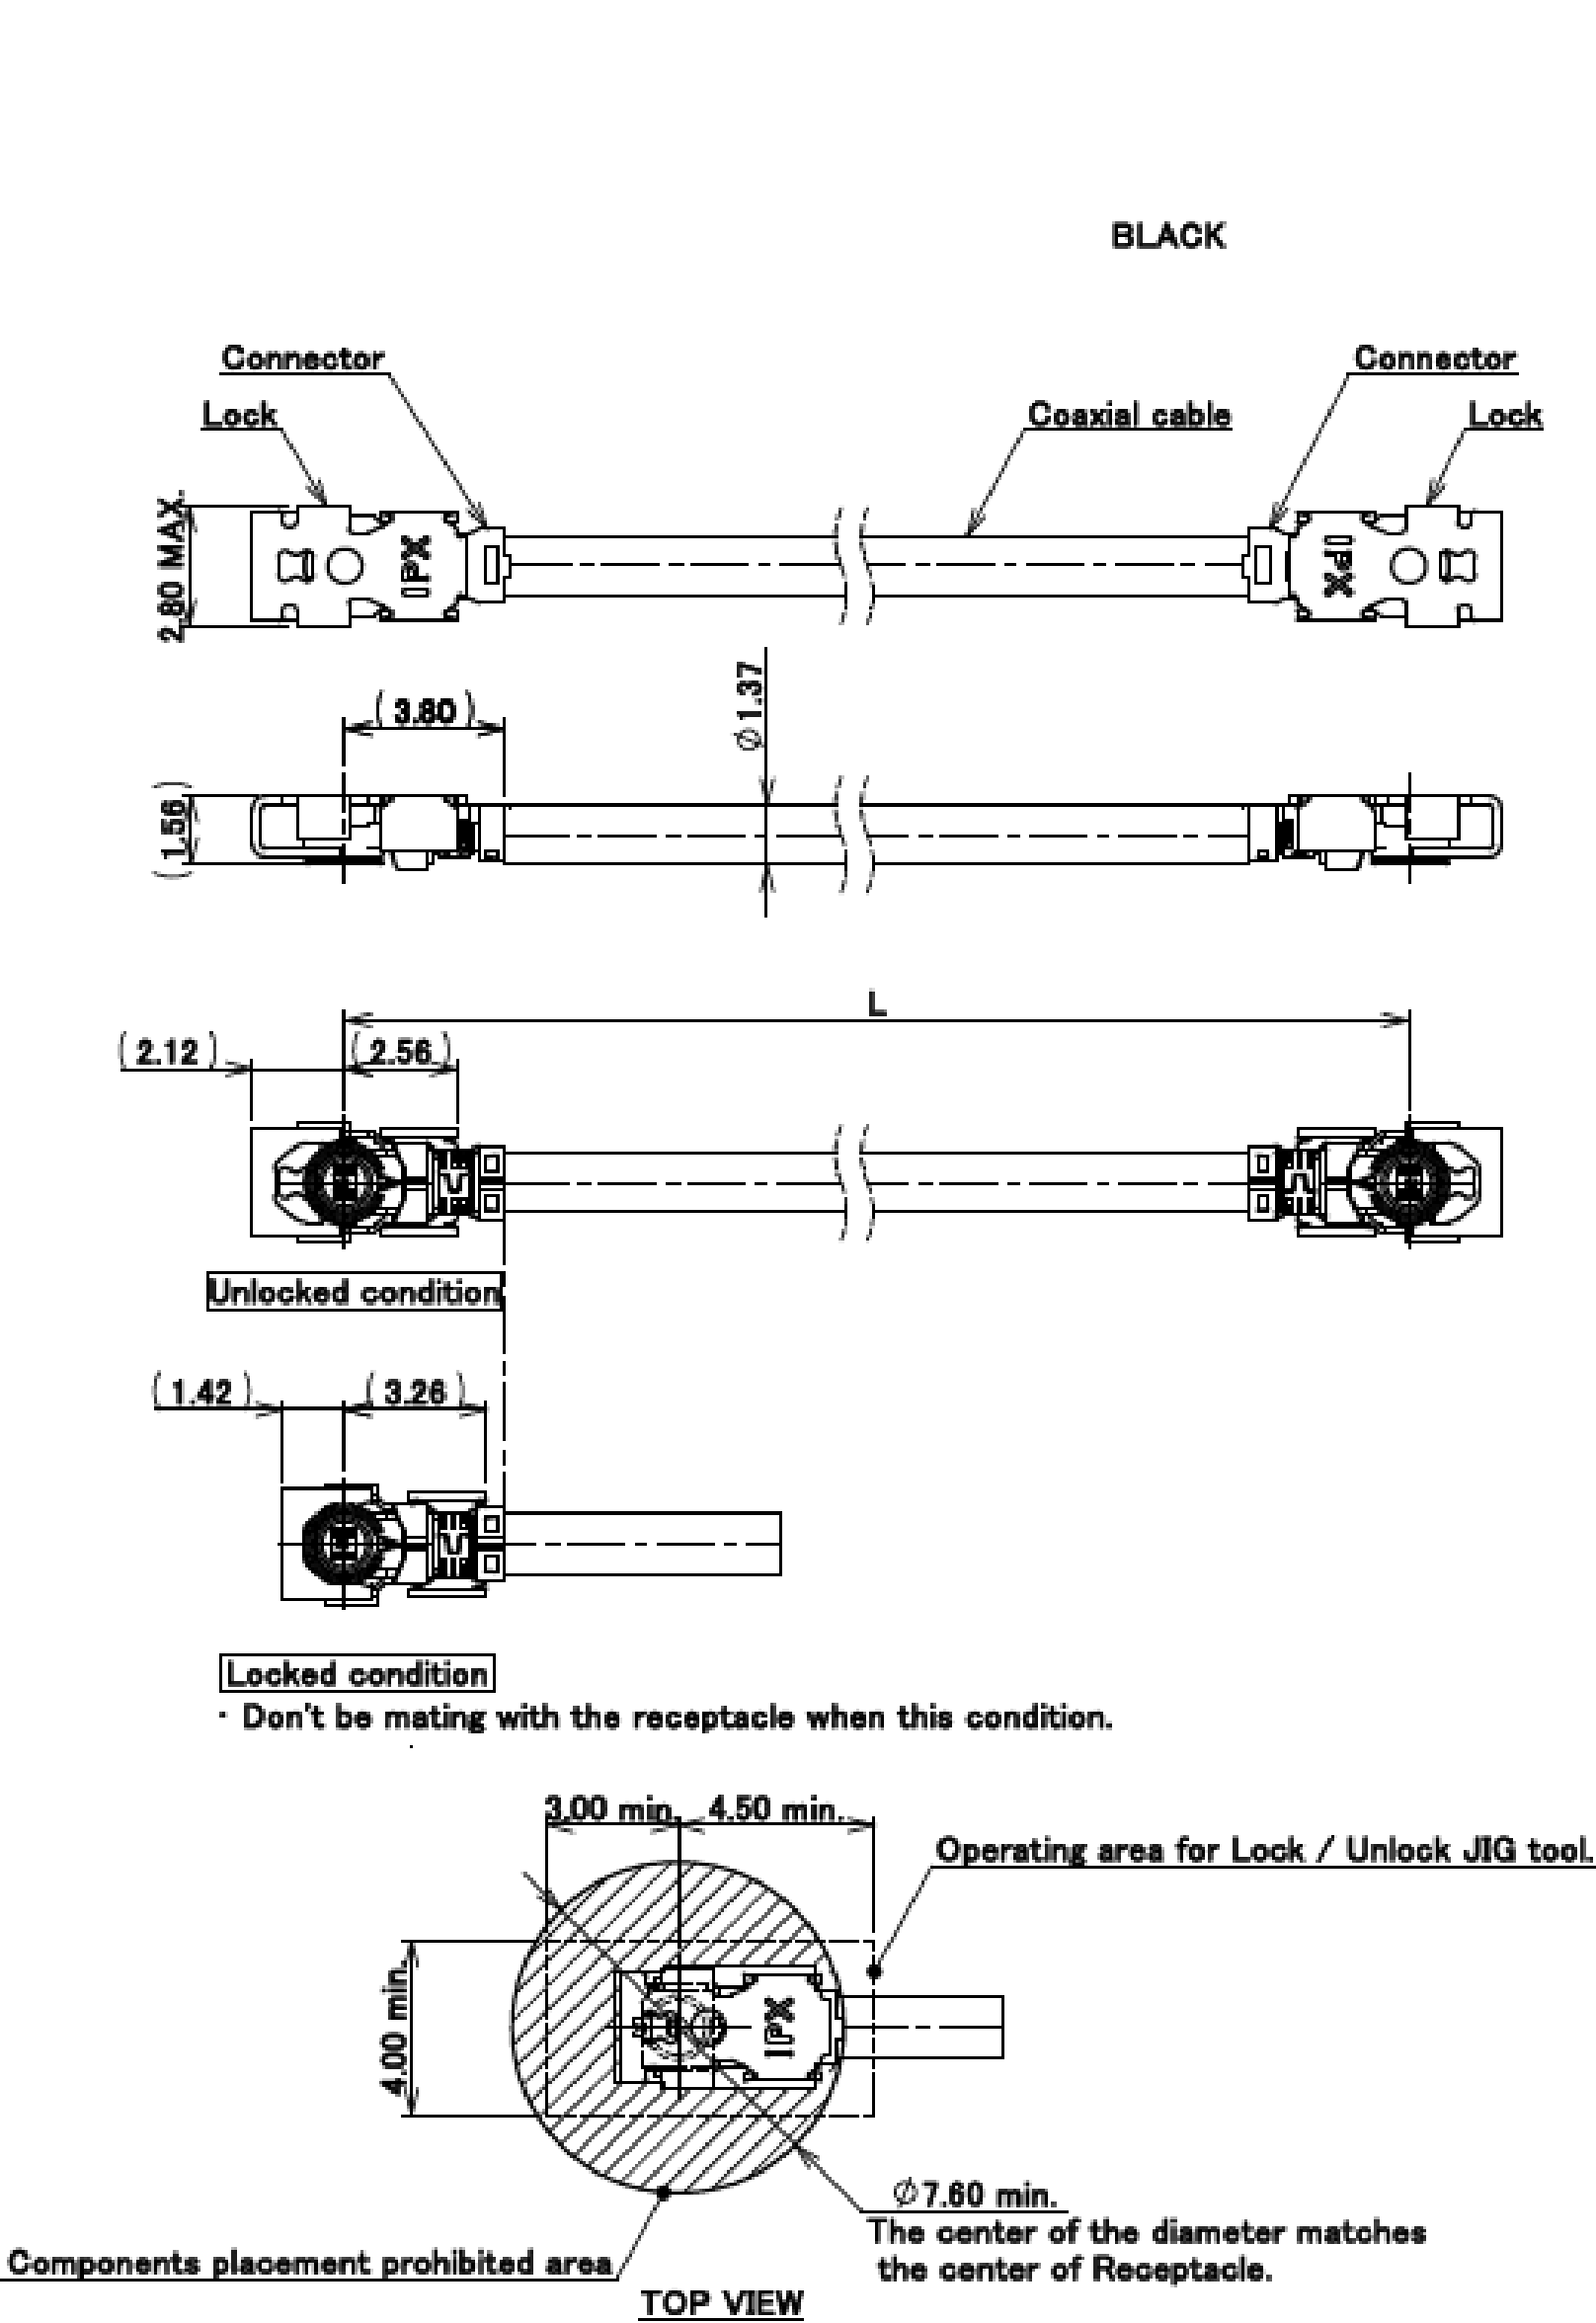

NOTES




1. Constructions
(1) Connector : MHF4L Plug
(2) Coaxial cable : AWG#30 $\phi 1.37$
2. Orientation of connector : $0^\circ \pm 45^\circ$
3. Packing : Bag
4. This product is RoHS compliant.
5. Cable crimp strength : 15N MIN.
6. Permissible load of cable at mating.

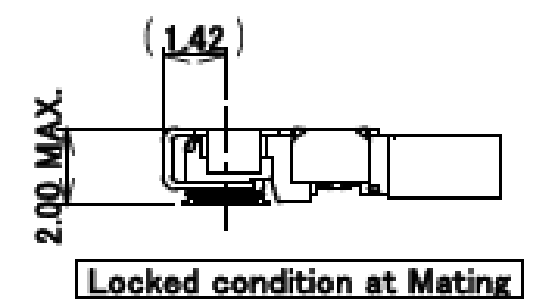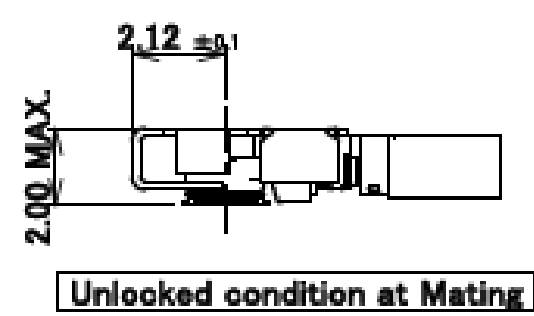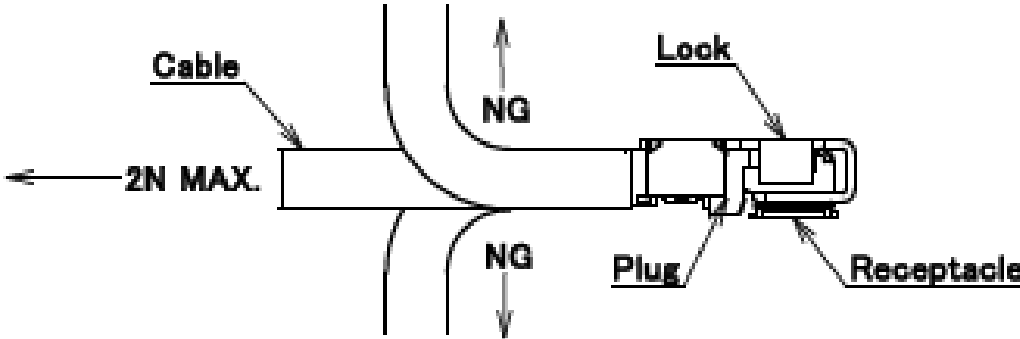

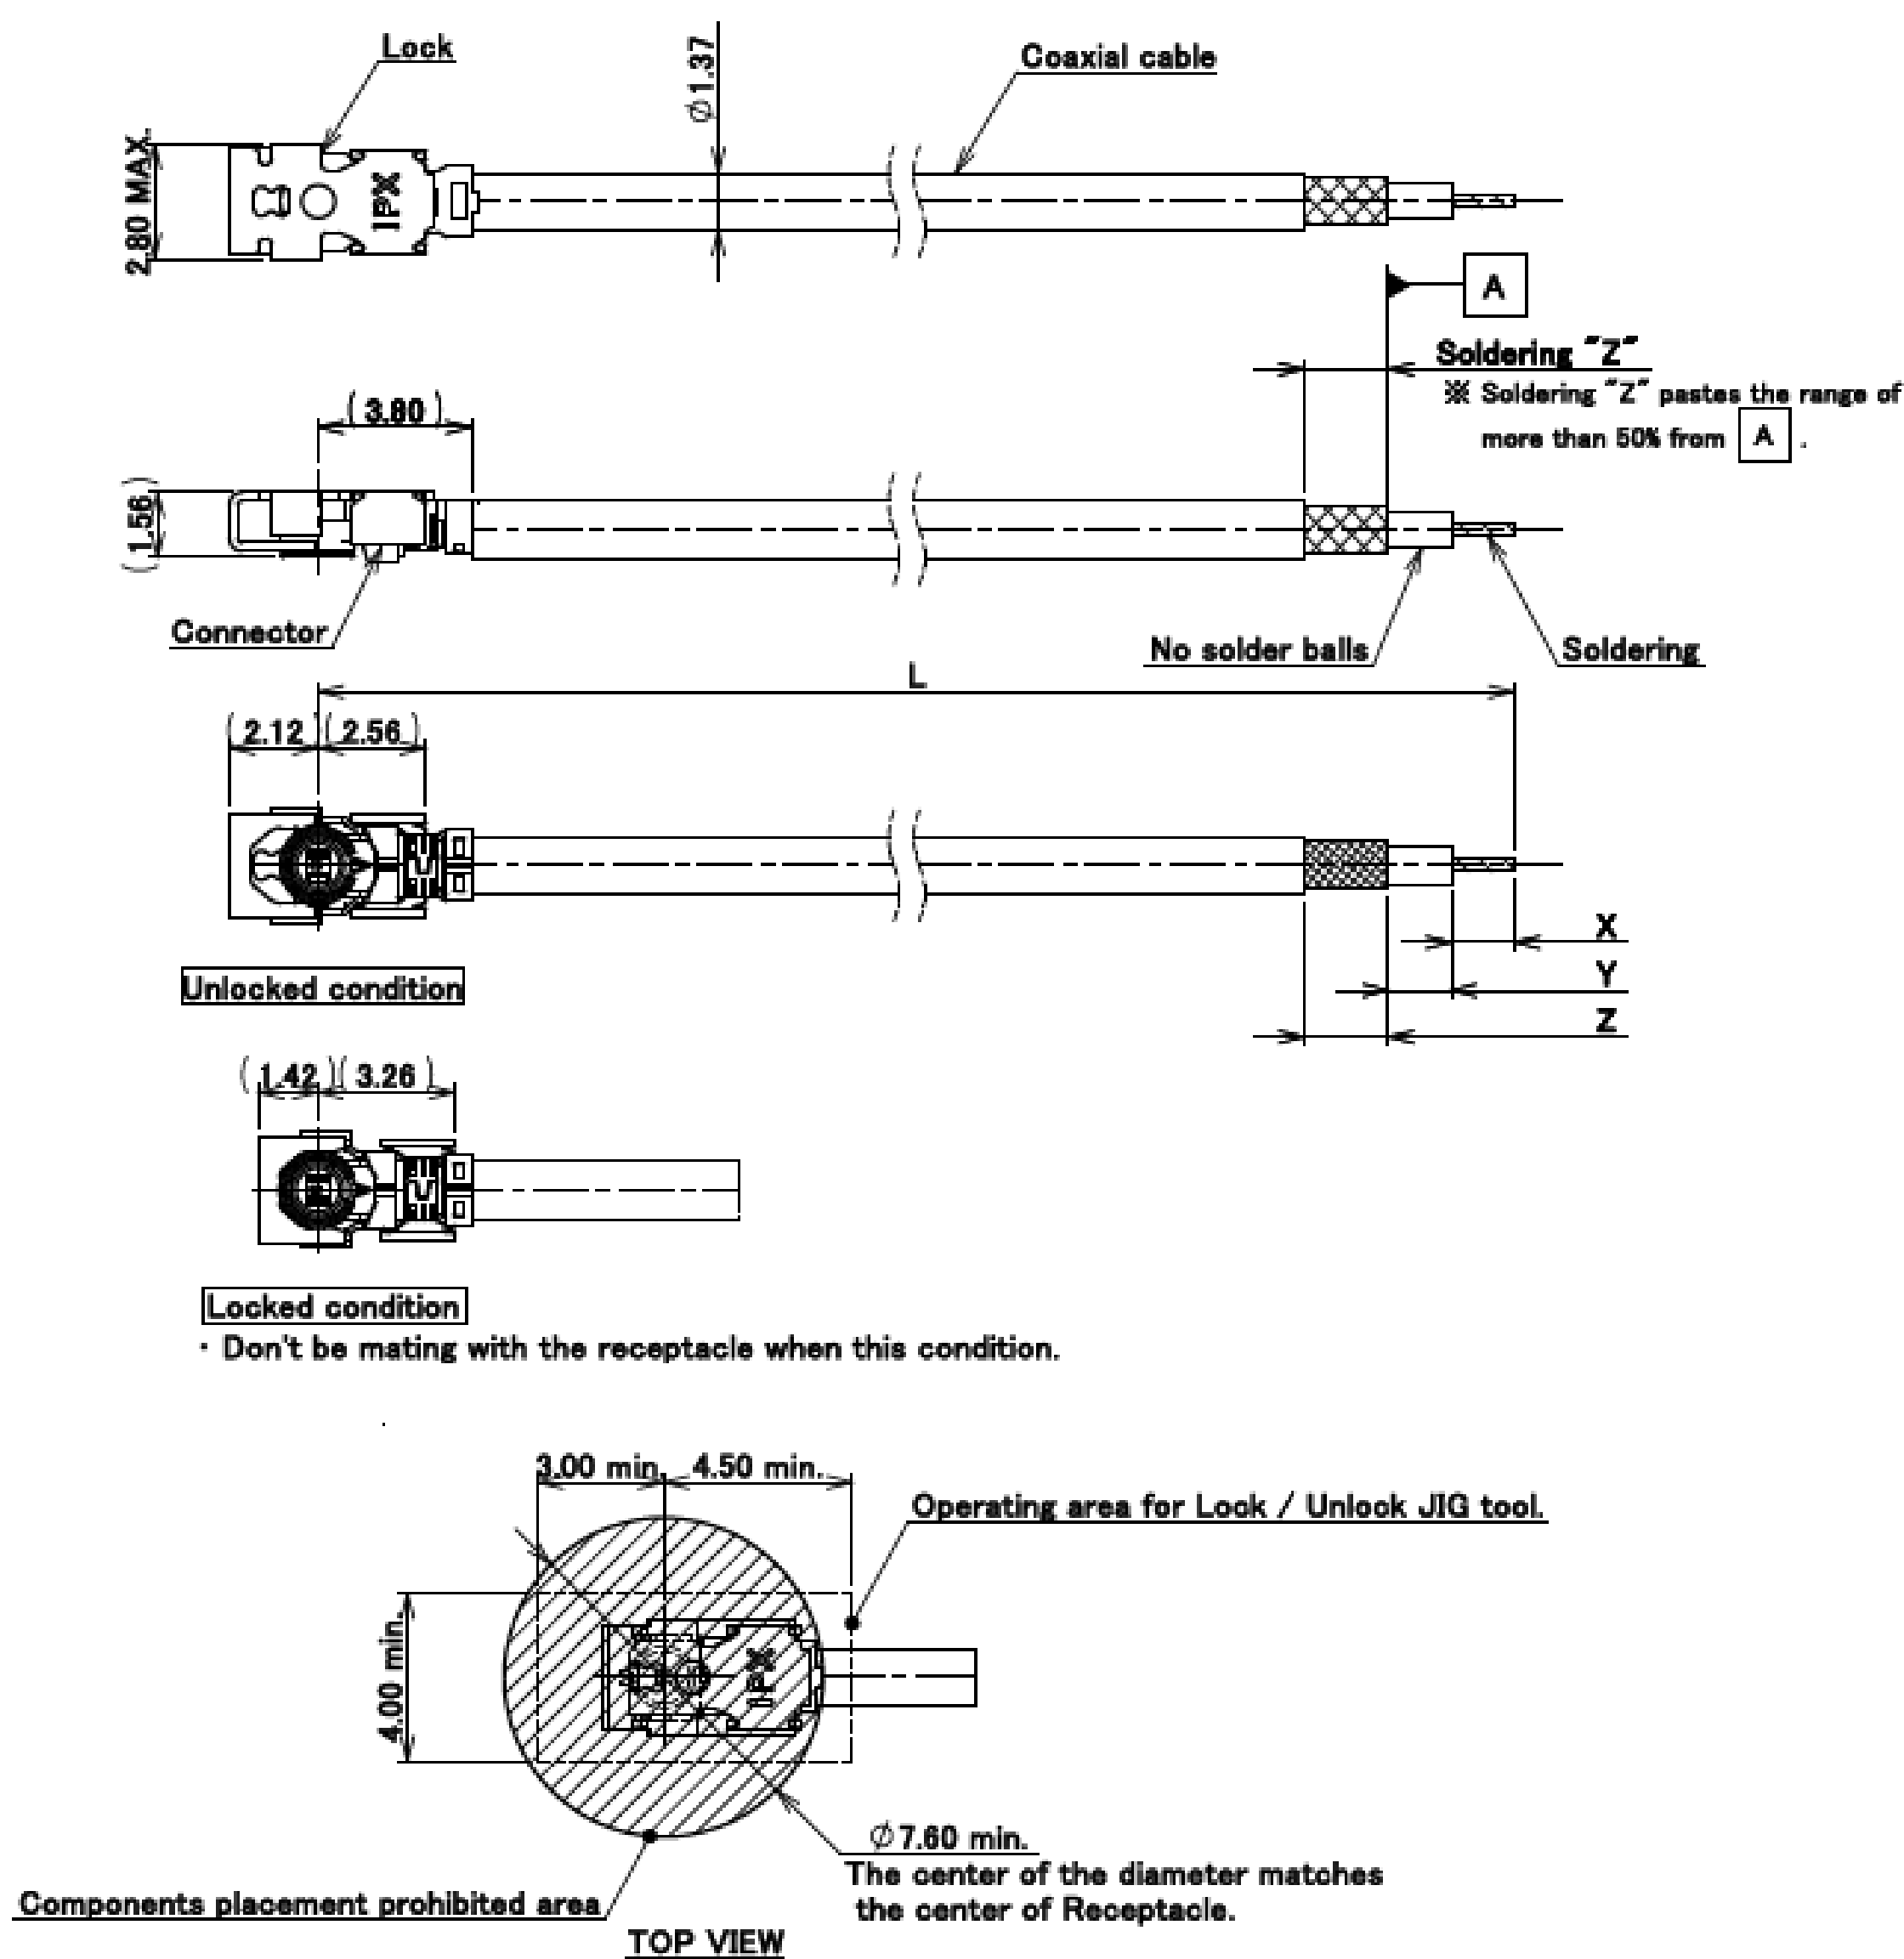

NOTES

1. Constructions
 - (1) Connector : MHF4L Plug
 - (2) Coaxial cable : AWG#30 Φ 1.37
2. Packing : Bag
3. This product is RoHS compliant.
4. Cable crimp strength : 15N MIN.
5. Permissible load of cable at mating.

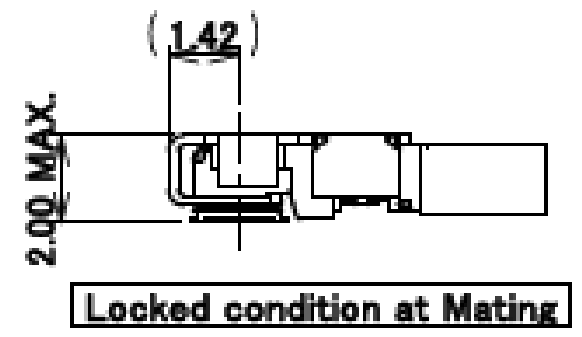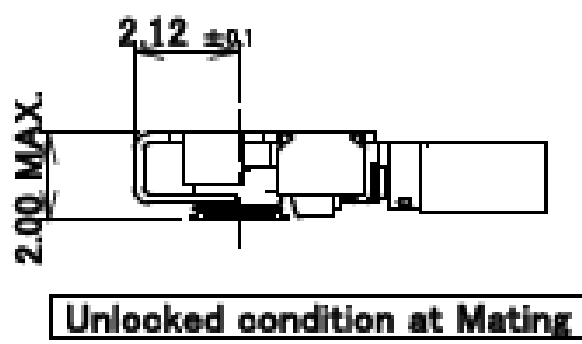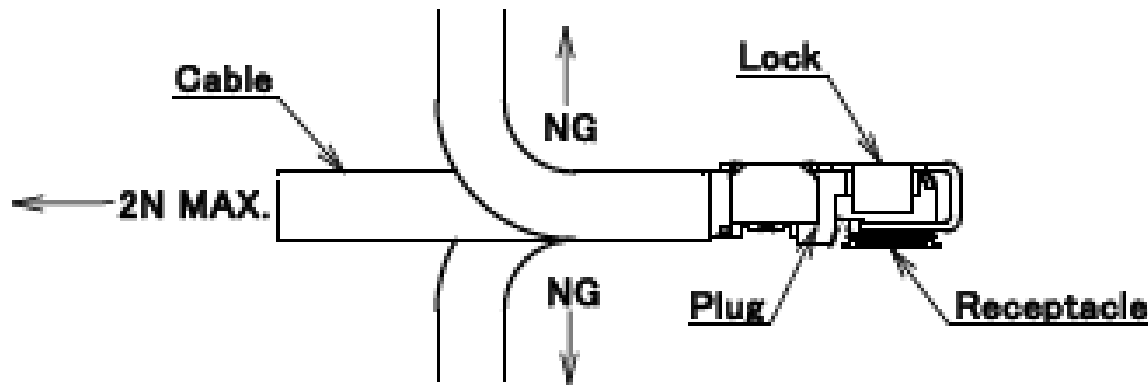


Custom Connectors Available

 RF
Connectors

MHF® series



Micro-coaxial/Twinax
Connectors

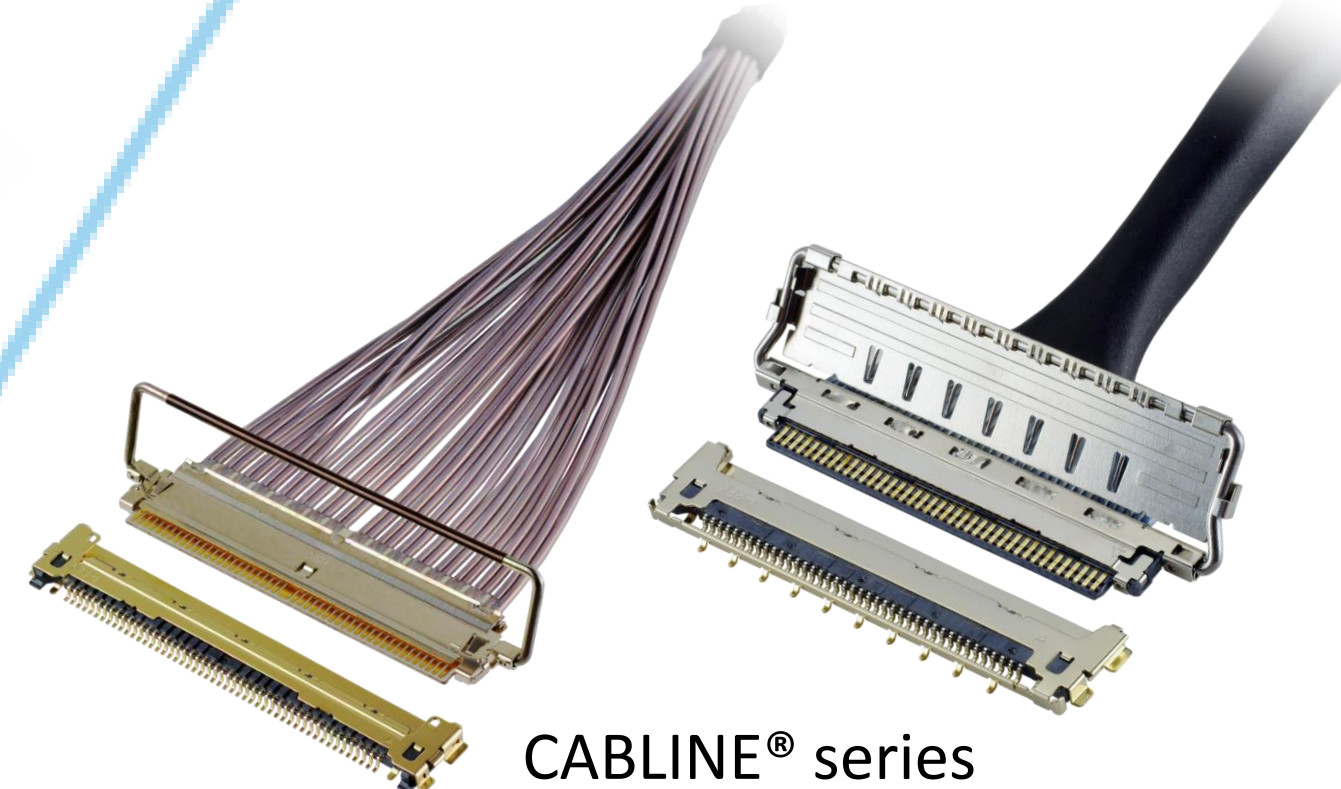

CABLINE® series




Wire-to-Board
Connectors/
Terminals


AP series



ISH® series

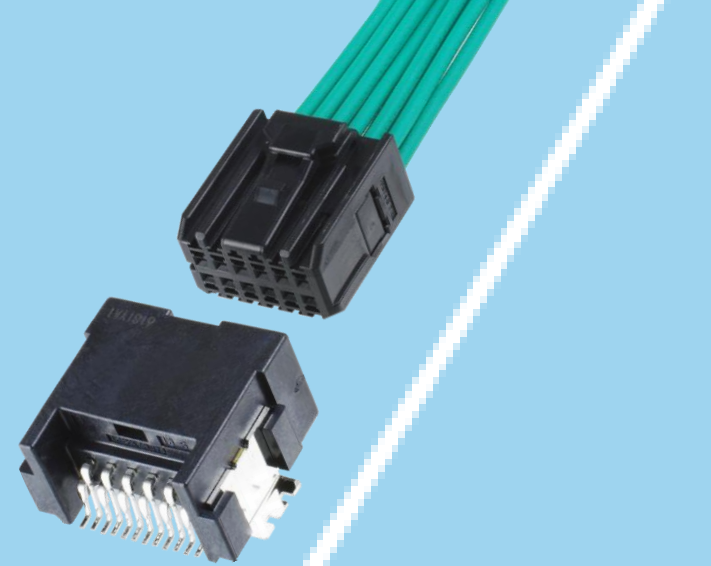


NOVASTACK® series

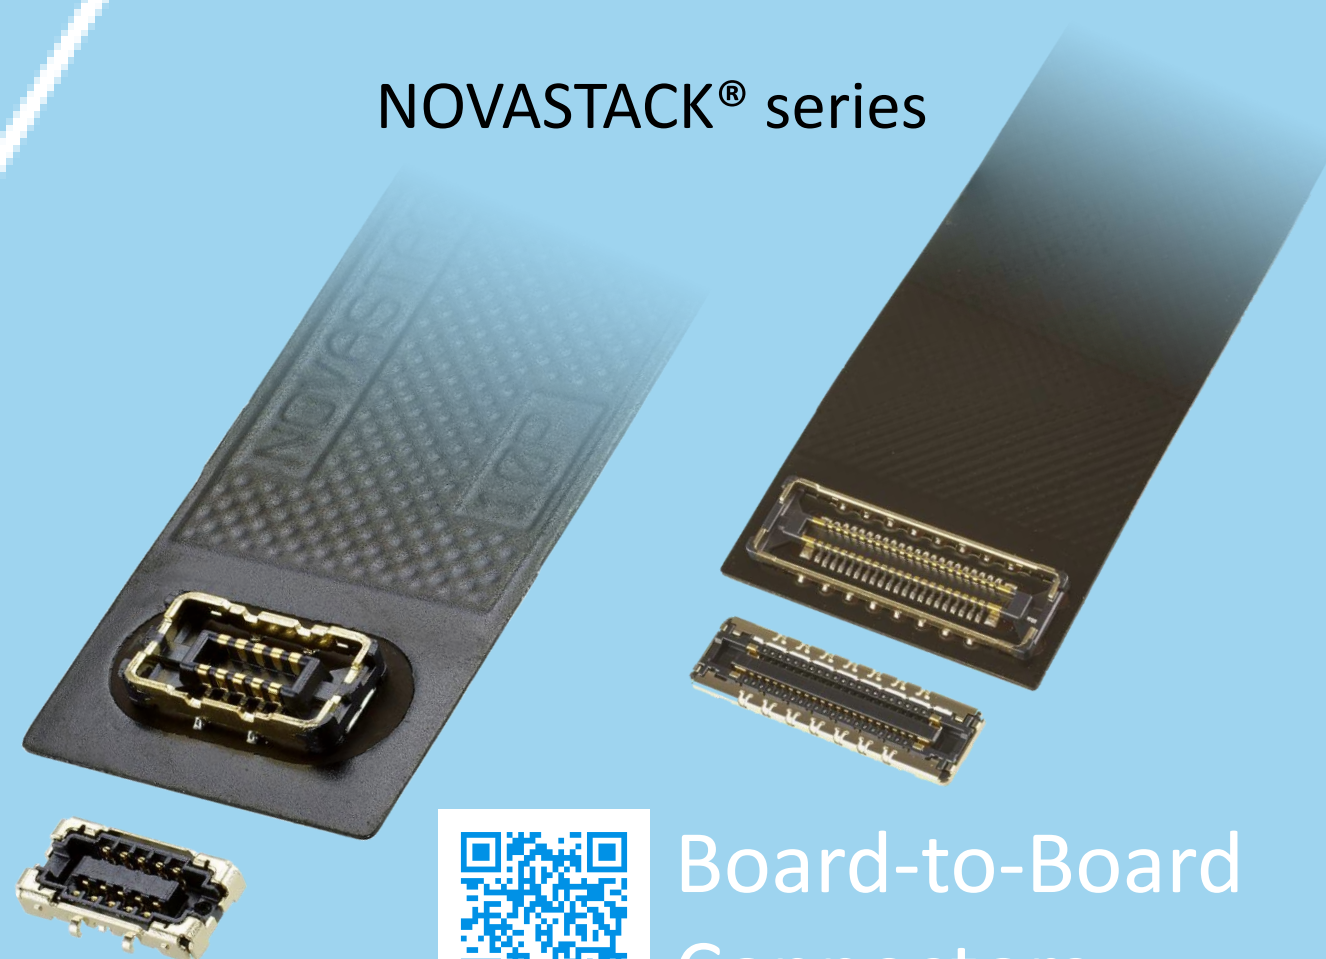

Board-to-Board
Connectors



I/O
Connectors

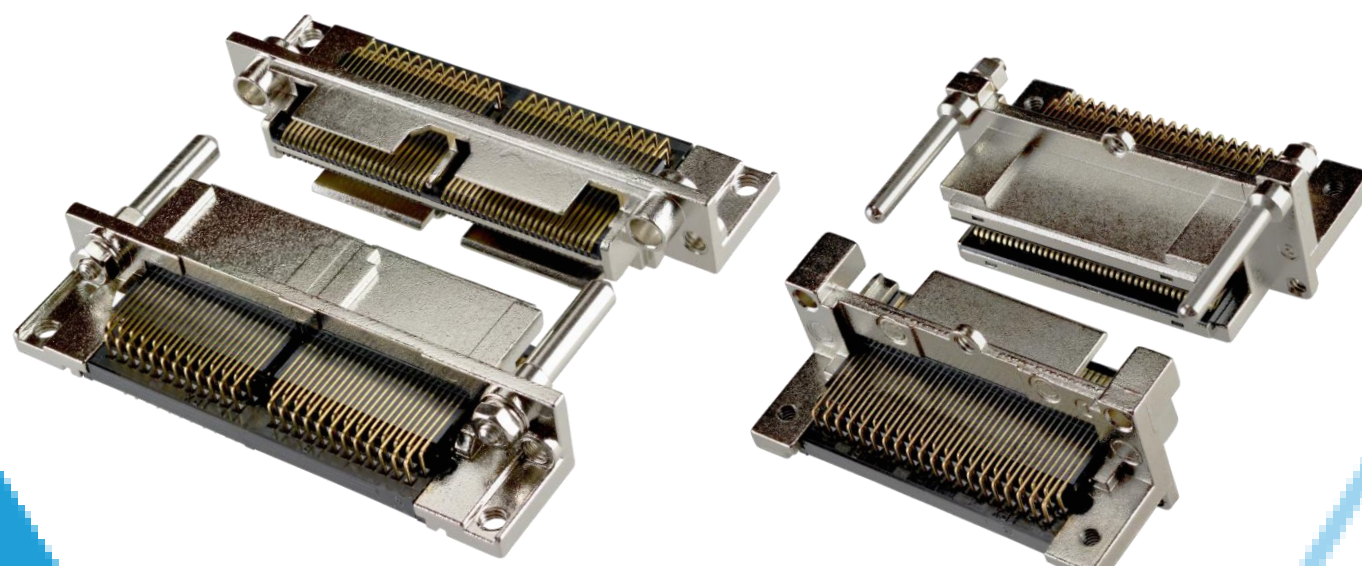


MINIDOCK™ series



FPC/FFC
Connectors

MINIFLEX® series

EVAFLEX® series

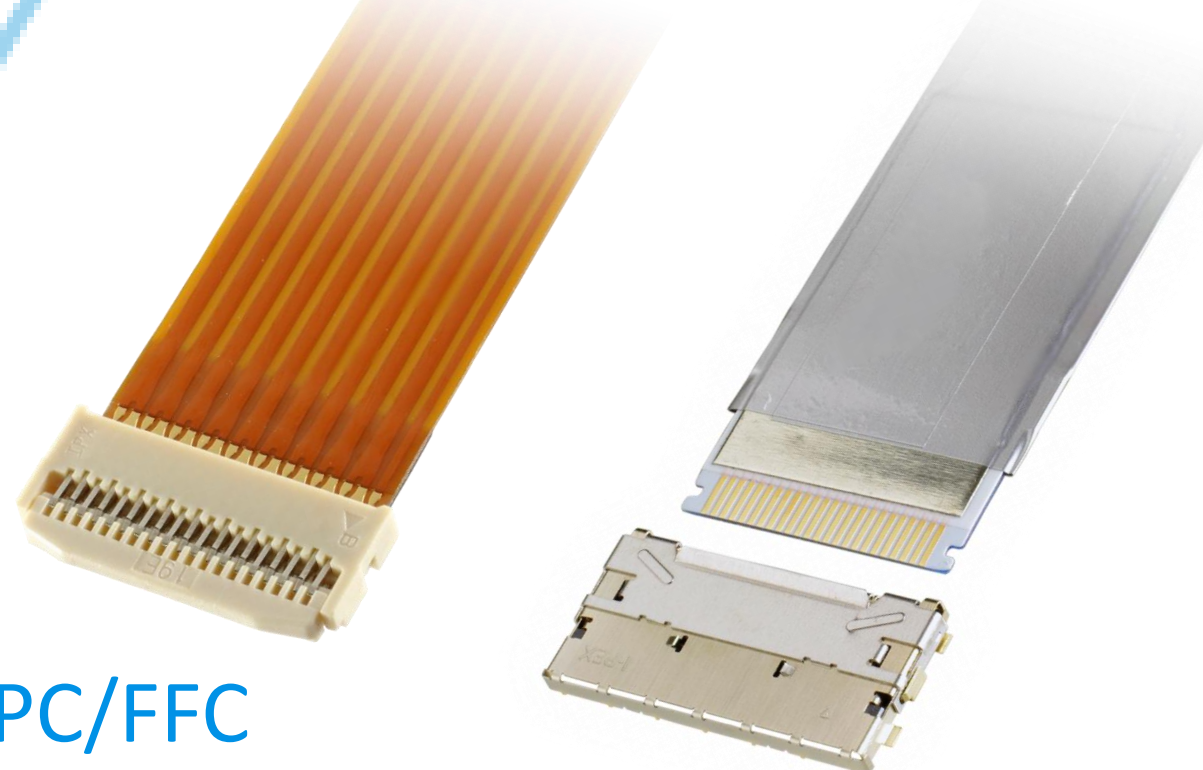

Inquiry



I-PEX, MHF, CABLINE, NOVASTACK, ISH, IARP, MINIFLEX, EVAFLEX, MINIDOCK and ZenShield are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation, medical equipment, safety equipment etc.).

Contact your sales representative
or more detailed information.

www.i-pex.com



I-PEX

© I-PEX Inc. 2025
All rights reserved