





- ✓ 45 GHz까지 우수한 전송특성을 발휘함
- ✓ 특성 임피던스의 편차를 큰 폭으로 억제한 커넥터 디자인
- ✓ 대응 케이블 : 1.13 mm (30)

Maximum height (mm)	1.4	
Outside dimension of receptacle(mm)	2.1 x 2.0	
Applicable wire gauge	O.D. 1.13 mm / AWG 30	
Frequency	DC~45 GHz (Nominal)	
VSWR (L=100 mm) (Nominal)	DC~5 GHz	1.20 max.
	5 GHz~10 GHz	1.35 max.
	10 GHz~15 GHz	1.50 max.
	15 GHz~20 GHz	1.68 max.
	20 GHz~45GHz	1.68 max.
Service temp. (Celsius)	-40 degree ~ +90 degree	
Characteristic impedance	50 ohm	
Rated voltage	AC60V	
Contact resistance	20m ohm max.	
Withstand voltage	AC200V/min	
Insulation resistance	500M ohm min./DC100V	

45 GHz까지 우수한 전송특성을 발휘함

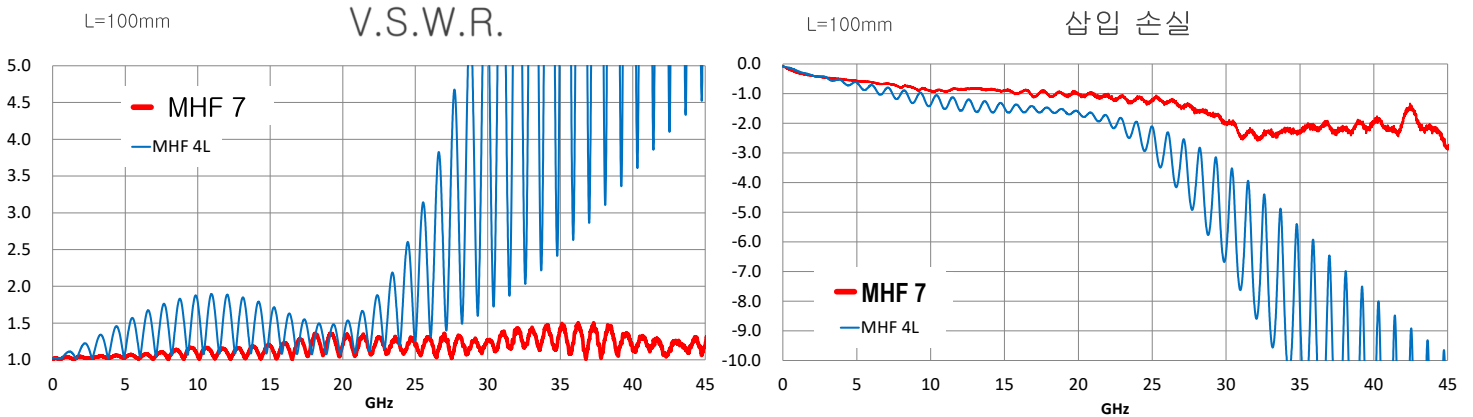

특성 임피던스의 편차를 큰 폭으로 억제한 커넥터 디자인

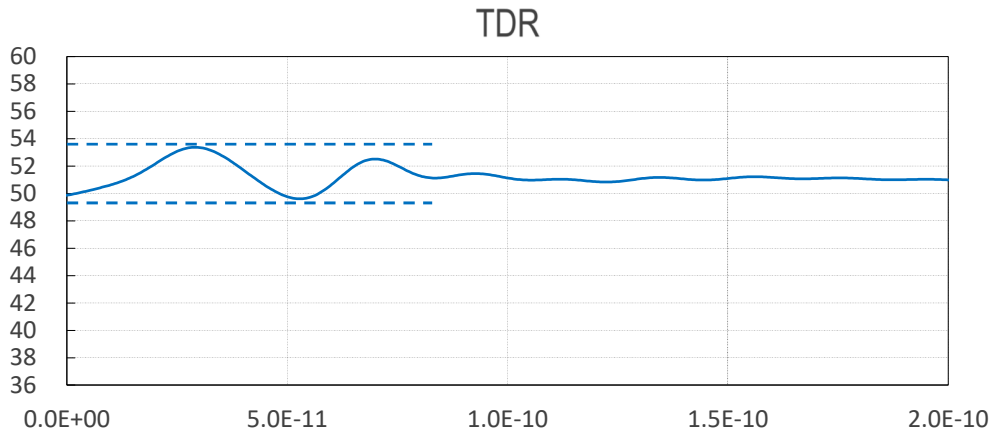

대응 케이블 : 1.13 mm (30)

동축 O.D. (중앙 커넥터 AWG)	채널 높이 최대 1.4mm
2.00 mm (26)	
1.80 mm (30)	
1.37 mm (30)	
1.32 mm (32)	
1.13 mm (30)	○
1.13 mm (32)	
0.95 mm (33)	
0.81 mm (33)	
0.81 mm (36)	
0.64 mm (36)	
0.48 mm (38)	
FPC	
Receptacle	MHF 7 receptacle





MHF[®] 7

Component Parts Detail

MHF[®] 7 plug




Recommended P/N	20939-001R-13
PART NO.	20939-001R-13

Offered as harness only.

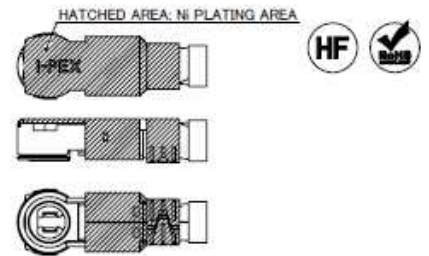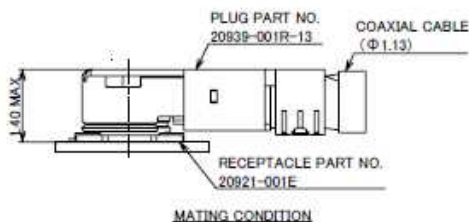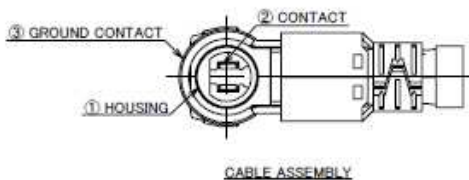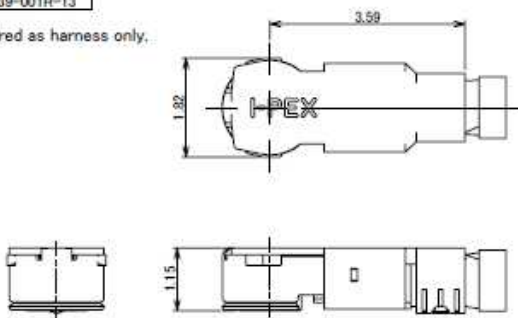

NOTES

1. APPLICABLE CONNECTOR: 20921-001E
2. MATING AND UNMATING INSTRUCTION
 - 2-1. MATING
MATE THE CONNECTOR VERTICALLY AS MUCH AS POSSIBLE. ADJUSTING THE MATING AXIS OF PLUG AND RECEPTACLE. DO NOT SLANT MATE.
 - 2-2. UNMATING
USE THE MATING AND UNMATING TOOL (PART NO. 91187-0001) AS THE FOLLOWING DRAWING, AND PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.
3. PERMISSIBLE LOAD OF CABLE AT MATING.
4. CHARACTERISTIC IMPEDANCE: 50 Ω (NOMINAL VALUE)

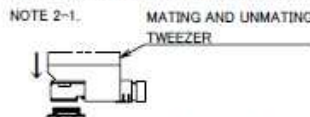

3	GROUND CONTACT	PHOSPHOR BRONZE	ALL OVER: Ni 0.7 μm MIN. CONTACT PART: Au 0.1 μm MIN. [Ni PLATING AREA] Ni ONLY
2	CONTACT	CORSON ALLOY	ALL OVER: Ni 1.00 μm MIN. CONTACT PART: Au 0.1 μm MIN.
1	HOUSING	LCP	UL94V-0, WHITE
NO.	DESCRIPTION	MATERIAL	FINISH, REMARKS

Rev.3

MHF[®] 7 plug


ITEMS	SPECIFICATION
APPLICABLE CONNECTOR PART No.	20921-001E
RATING VOLTAGE	60 V AC (R.M.S)/DC
RATING FREQUENCY	DC~43.5 GHz
OPERATING TEMPERATURE	233~363 K (-40°C~+90°C)
OPERATING HUMIDITY	90% MAX. (NON-CONDENSING)
CHARACTERISTIC IMPEDANCE	50 ohm (NOMINAL VALUE)
VSWR	1.433 MAX. AT 0.1 ~ 1.0 GHz, 1.671 MAX. AT 24.25 ~ 43.50 GHz
MAIN CONTACT RESISTANCE	INITIAL : 20 mohm MAX. / AFTER TEST : \leq R 20 mohm MAX.
GROUND CONTACT RESISTANCE	INITIAL : 20 mohm MAX. / AFTER TEST : \leq R 20 mohm MAX.
INSULATION RESISTANCE	INITIAL : 500 Mohm MIN. / AFTER TEST : 100 Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC200V 1min
DURABILITY	20 CYCLES
MATING FORCE (INITIAL / AFTER TEST)	INITIAL: 25N MAX., 5N MIN. (VERTICAL DIRECTION) AFTER TEST: 25N MAX., 5N MIN. (VERTICAL DIRECTION)
UNMATING FORCE (INITIAL / AFTER TEST)	INITIAL: 15N MAX., 5N MIN. (VERTICAL DIRECTION) AFTER TEST: 15N MAX., 5N MIN. (VERTICAL DIRECTION)
CRIMP STRENGTH	5N MIN.
PRODUCT SPECIFICATION	PRS-2574
TEST REPORT	TR-19022
INSTRUCTION MANUAL	HIM-19008
APPEARANCE CRITERIA No.	QLS-A***

Rev.3

Accessories for MHF[®] 7 plug



MHF 7 PLUG INSPECTION ADAPTER
PART NO. 91106-0001






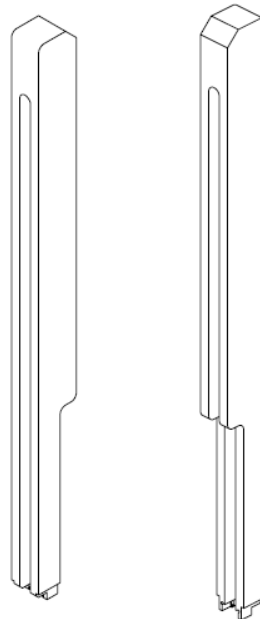


MHF 7 13 TYPE MATING AND UNMATING TWEEZER
PART NO. 91187-0002

Rev.3

MHF® 7 Receptacle

Recommended P/N	20921-001E
PART NO.	20921-001E

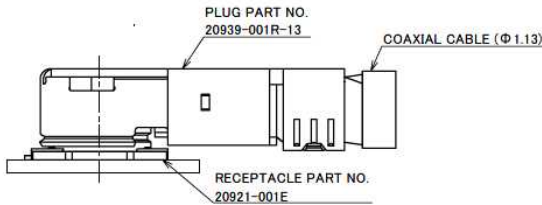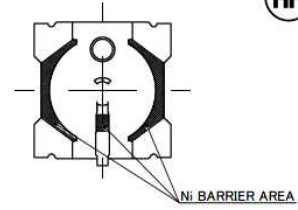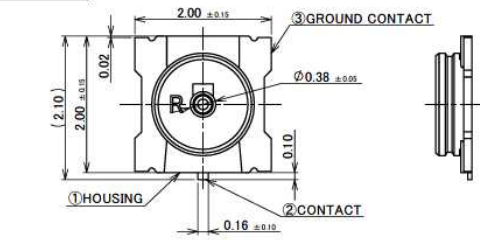

MATING CONDITION

NOTES

1. APPLICABLE CONNECTOR
20939-001R-13
2. COPLANARITY: 0.08mm MAX.
3. CHARACTERISTIC IMPEDANCE: 50Ω (NOMINAL VALUE)

NO.	DESCRIPTION	MATERIAL	FINISH, REMARKS
3	GROUND CONTACT	PHOSPHOR BRONZE	ALL OVER: Ni 1.00 μm MIN. CONTACT PART: Au 0.05 μm MIN. SOLDERING PART: Au AREA: 0.02 μm MIN.
2	CONTACT	CORSON ALLOY	ALL OVER: Ni 1.00 μm MIN. CONTACT PART: Au 0.1 μm MIN. SOLDERING PART: Au AREA: 0.02 μm MIN.
1	HOUSING	LCP	UL94V-0, WHITE

Confidential C





Rev.5

MHF® 7 Receptacle

ITEMS	SPECIFICATION
APPLICABLE CONNECTOR PART No.	20939-001R-13
RATING VOLTAGE	60 V AC (R.M.S)/DC
RATING FREQUENCY	DC ~ 43.5 GHz
OPERATING TEMPERATURE	233 ~ 363 K (-40°C ~ +90°C)
OPERATING HUMIDITY	90% MAX. (NON-CONDENSING)
CHARACTERISTIC IMPEDANCE	50 ohm (NOMINAL VALUE)
VSWR	1.433 MAX. AT 0.1 ~ 1.0 GHz, 1.671 MAX. AT 24.25 ~ 43.50 GHz
MAIN CONTACT RESISTANCE	INITIAL : 20 mohm MAX. / AFTER TEST : $\leq R$ 20 mohm MAX.
GROUND CONTACT RESISTANCE	INITIAL : 20 mohm MAX. / AFTER TEST : $\leq R$ 20 mohm MAX.
INSULATION RESISTANCE	INITIAL : 500 Mohm MIN. / AFTER TEST : 100 Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC200V 1min
DURABILITY	20 CYCLES
MATING FORCE (INITIAL / AFTER TEST)	INITIAL: 25N MAX., 5N MIN. (VERTICAL DIRECTION) AFTER TEST: 25N MAX., 5N MIN. (VERTICAL DIRECTION)
UNMATING FORCE (INITIAL / AFTER TEST)	INITIAL: 15N MAX., 5N MIN. (VERTICAL DIRECTION) AFTER TEST: 15N MAX., 5N MIN. (VERTICAL DIRECTION)
CRIMP STRENGTH	5N MIN.
PRODUCT SPECIFICATION	PRS-2574
TEST REPORT	TR-19022
PACKING STANDARD	PST-18124
INSTRUCTION MANUAL	HIM-19008
APPEARANCE CRITERIA No.	QLS-A***

Rev.5

MHF[®] 7 Receptacle

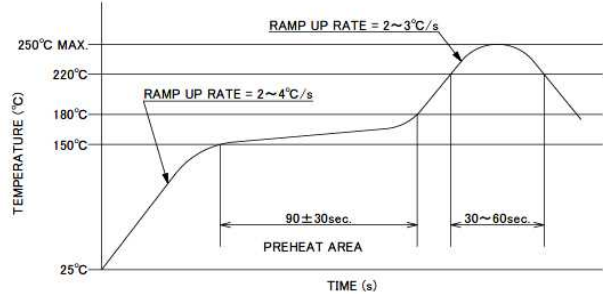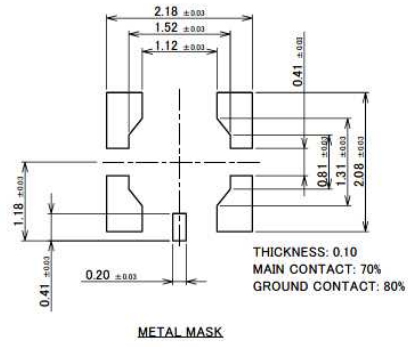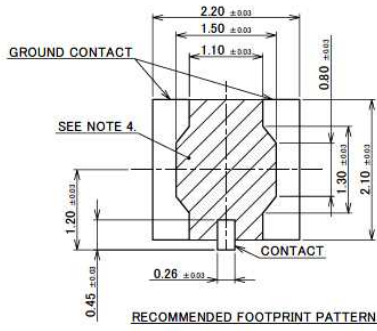

NOTES
4. NO GROUND, SIGNAL, AND RESIST IN THIS AREA.

Confidential C

Rev.5


Accessories for MHF[®] 7 Receptacle



MHF 7 RECEPTACLE INSPECTION ADAPTER
PART NO. 91107-0001



MHF 7 RECEPTACLE HIGH CYCLE N30 SMPM ADAPTER
PART NO. 91145-0001



MHF SERIES N30 SMPM TO 240MM ADAPTER CABLE
PART NO. 91137-J300

* 91145-0001 AND 91137-J300 SHOULD BE USED TOGETHER.

Rev.5



Copyright © I-PEX Inc. 2020. All rights reserved.

I-PEX, MHF, CABLINE, NOVASTACK, EVAFLEX, MINIFLEX, ISH, IARPB, IASLP, ESTORQ, i-Fit, ISFIT는 I-PEX주식회사의 등록상표입니다. 본 Catalog의 기재내용에 대해서는 예고없이 변경될 수 가 있으니 양해 부탁드립니다. 내용에 포함된 정보의 정확성과 갱신의무에 대해서 당사는 일체의 책임을 지지 않습니다. 사용 전에 「사용상의 주의」 및 「취급설명서」의 최신판을 반드시 보시고 제대로 이해하신 후에 사용해 주십시오. 사용상의 주의사항에 반해 본 제품을 사용함으로써 발생하는 결함, 고장 및 사고에 관해서 당사는 일체의 책임을 지지 않습니다. 매우 높은 신뢰성, 안전성이 요구되는 용도 등 인명에 관한 용도(원자력, 항공우주, 운송, 의료, 안전장치 등)에서의 사용에 관해서는 사전에 당사 영업부로 문의해 주시기 바랍니다.

자세한 내용은 영업 담당자에게 문의하십시오. [i-pex.com]