

MINIFLEX® 3-BFN LK

0.3 mm 間距、0.9 mm 高度、機械鎖扣、水平插拔、後掀式 FPC 連接器

Product Specifications:		Short Actuator	Long Actuator
Contact Pitch		0.3 mm	
Board Pitch		0.6 mm	
Contact Mating Length		Contact A: 0.9 mm Contact B: 0.45 mm	
Mated Size	Height	0.9 +/- 0.1 mm	
	Width	2.1 + (0.3 x pin count) mm	
	Depth	Open: 2.55 mm Close: 3.0 mm	Close: 3.5 mm
Available Pin Count *		9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37	51, 53, 57, 61, 71


*若有規格外 Pin 數需求,請與當地負責業務窗口聯繫。

Applicable FPC/FFC:


FPC / FFC Contact Pitch	0.3 mm
FPC / FFC Contact Point	Top and Bottom
FPC / FFC Thickness	0.2 +/- 0.03 mm



▶ 附加機械鎖扣提高 FPC 保持力

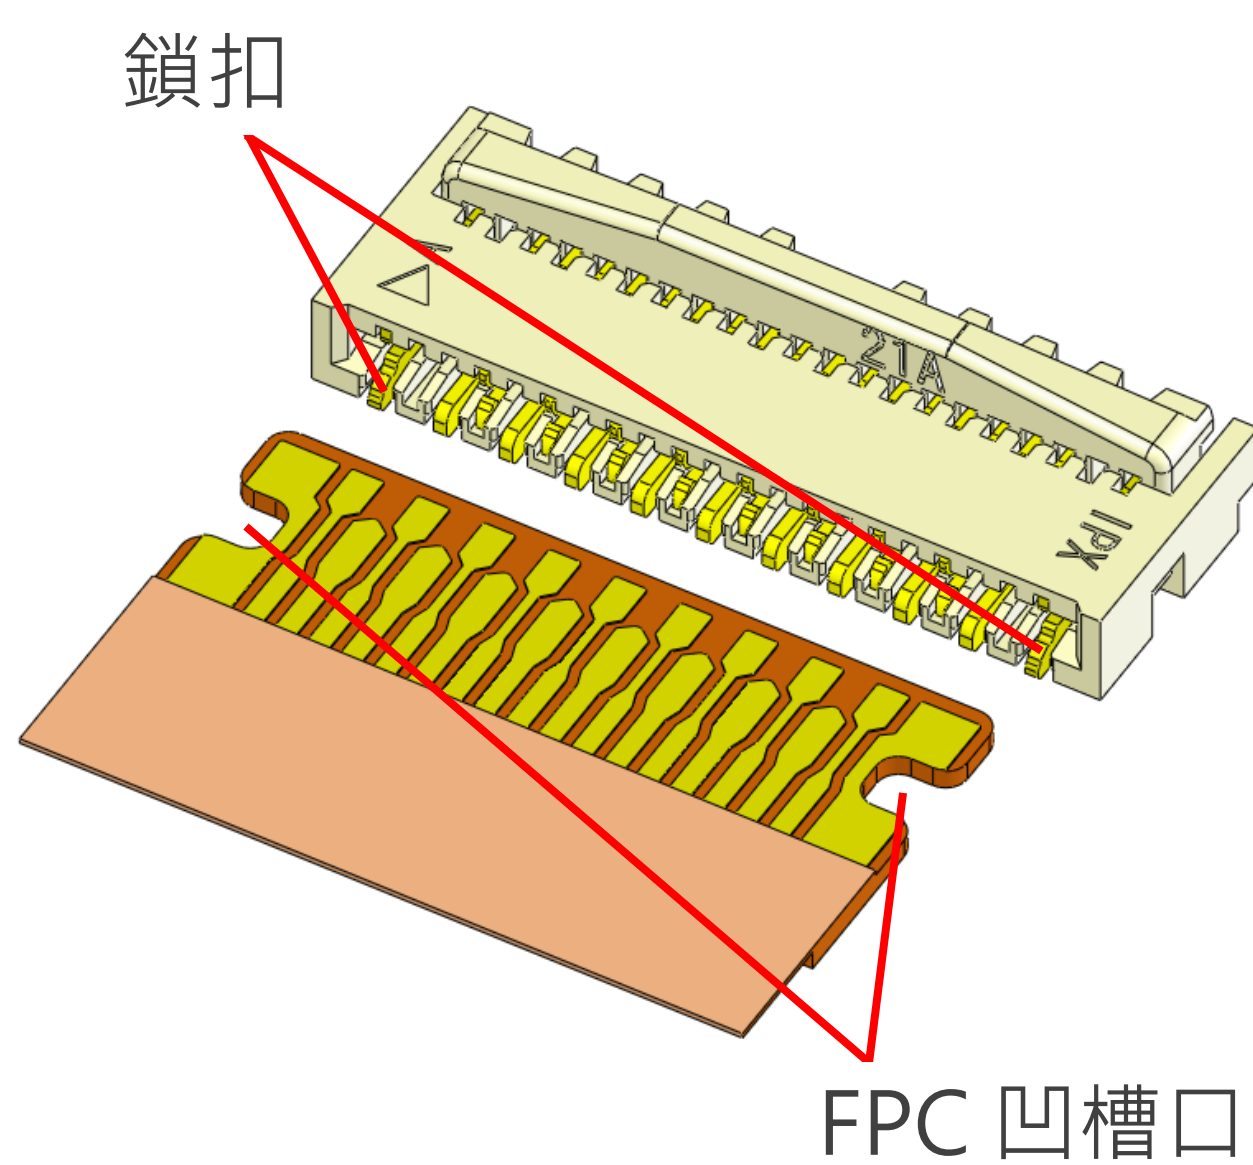



FPC 鎖扣機制維持
FPC 高保持力

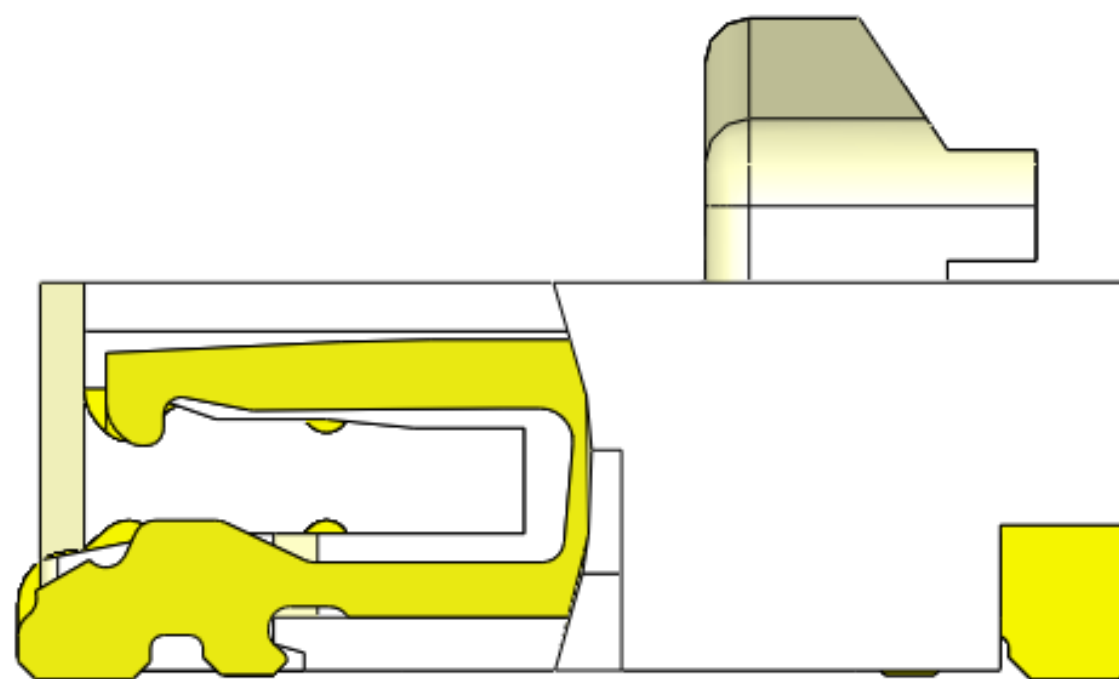

FPC 保持力比較 (19 pin)

MINIFLEX® 3-BFN LK	MINIFLEX® 3-BFN
11.34 N	6.7 N

▶ 防止端子變形的結構

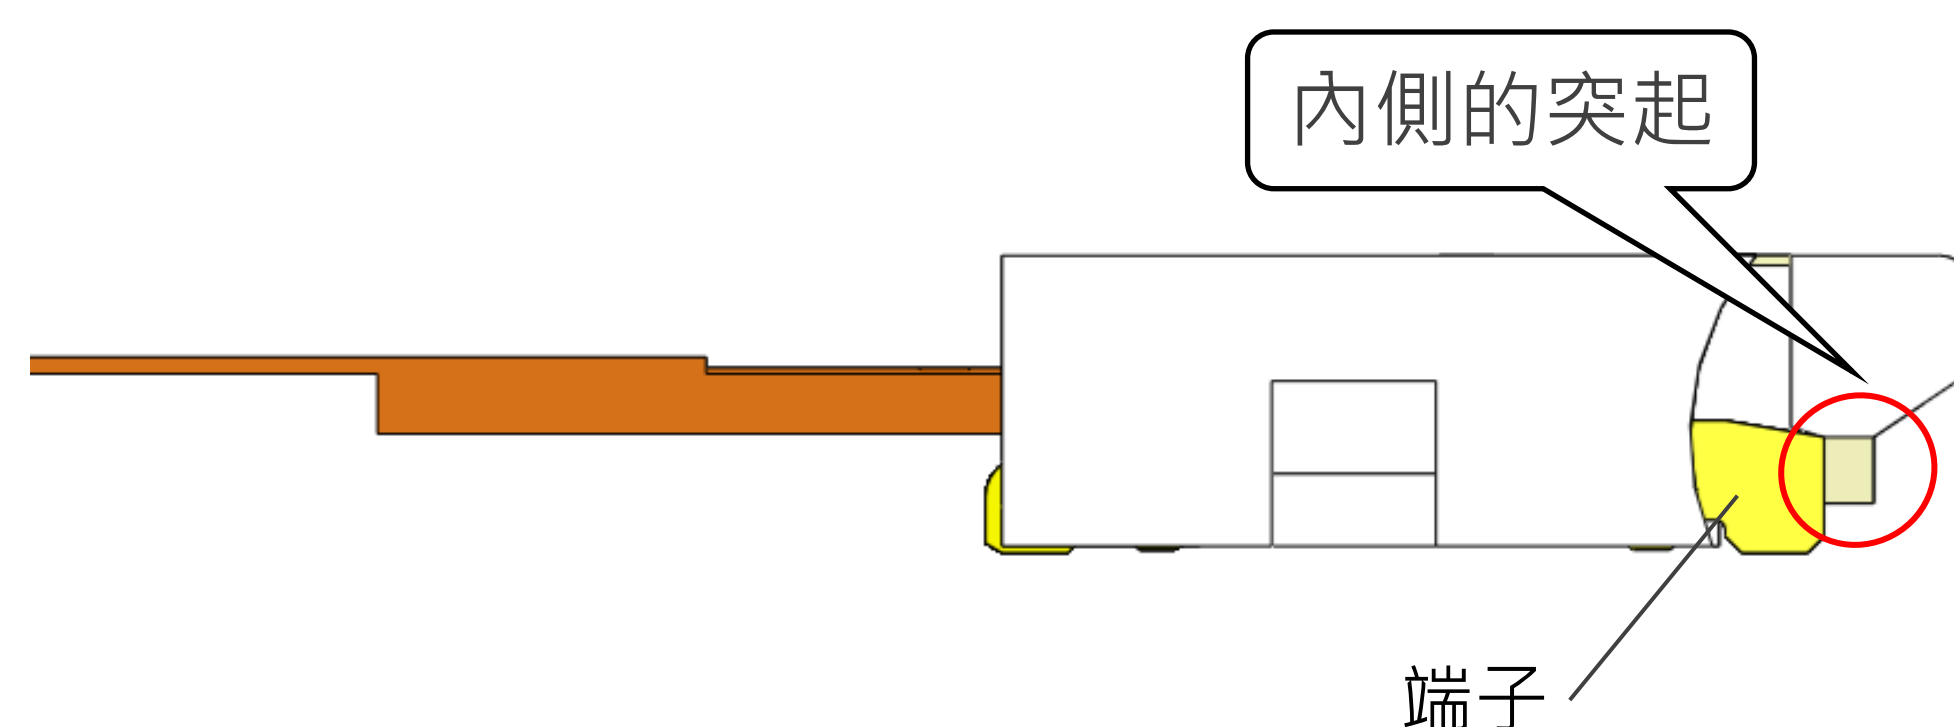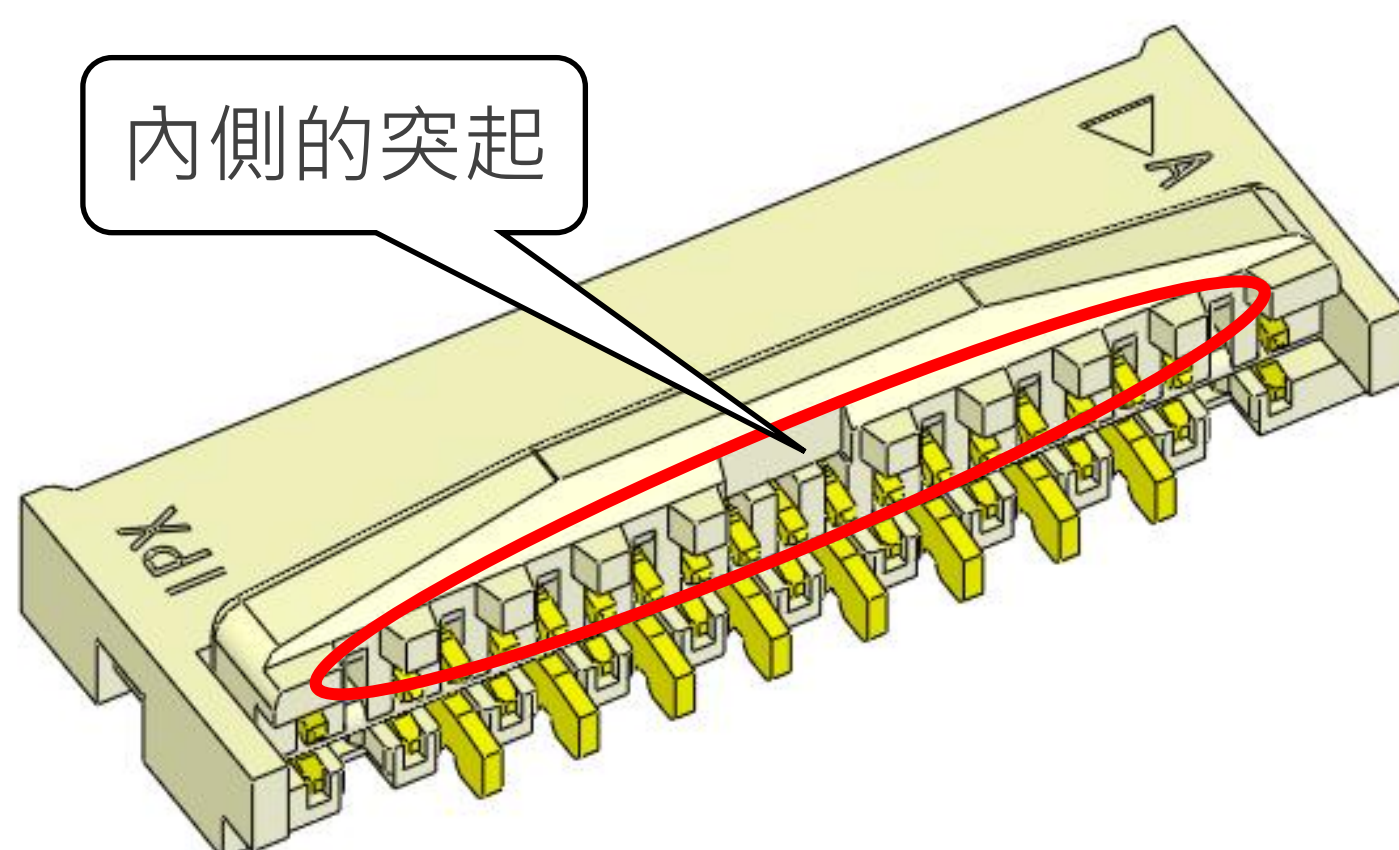


當鋼琴蓋被打開時,鋼琴蓋內側的突起可以防止指甲碰觸到端子而造成的變形

▶ 在沒有插入FPC的情況下關閉鋼琴蓋，連接器仍可使用

在 SMT 加工後，如果鋼琴蓋在沒有插入 FPC 的情況下意外閉合，連接器仍可使用

■ FPC未插入情況下閉合鋼琴蓋，其前後的接點間距比較如圖(圖表為 MINIFLEX® 3-BFN LK 35 pins)

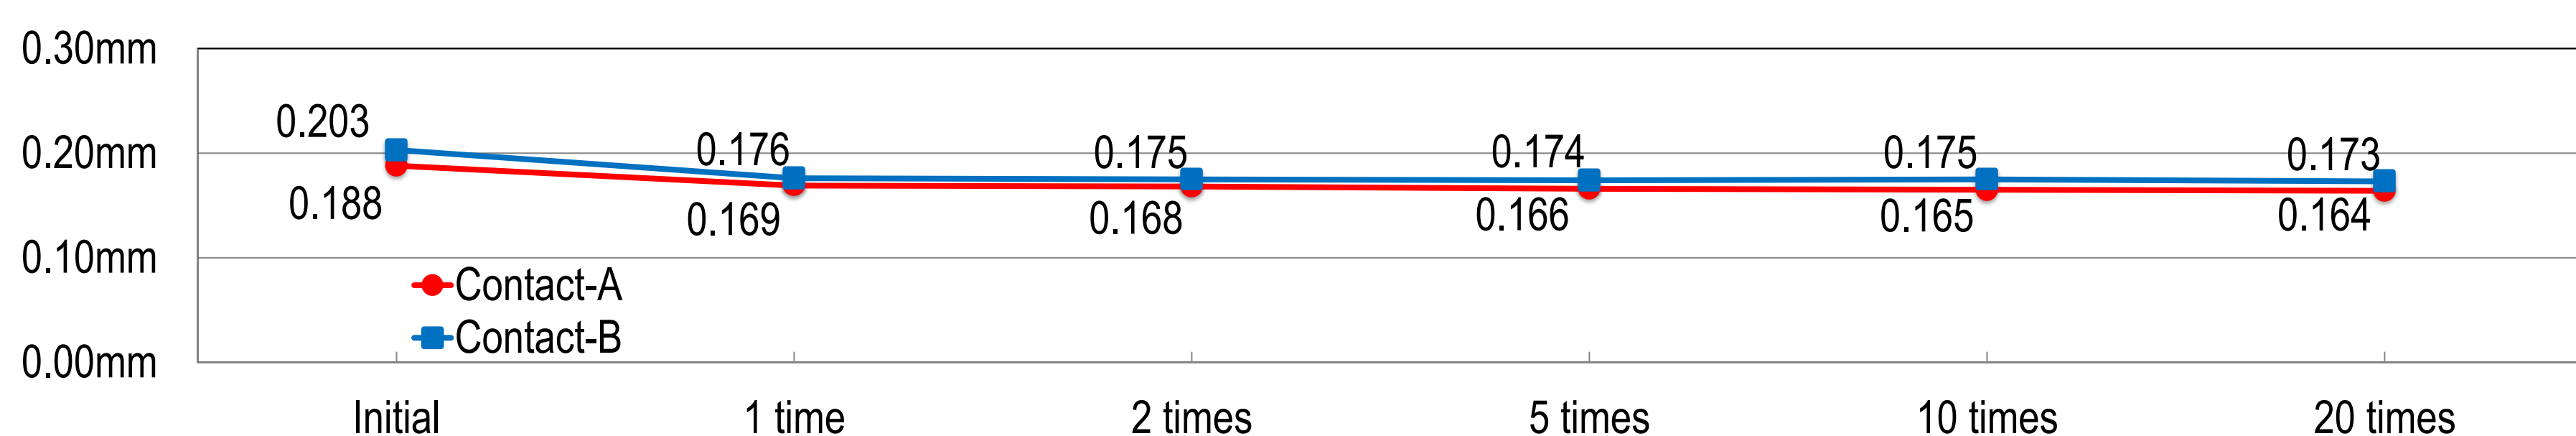

■ FPC插入力上升

■ FPC保持力無太大變化



Connector Assembly

5	LOCK	PHOSPHOR BRONZE	SOLDERING AREA : Au 0.03 μ m MIN. OVER Ni 1.00 μ m MIN.
4	CONTACT (B)	PHOSPHOR BRONZE	SEE TABLE 1, WITH Ni STRIPE
3	CONTACT (A)	PHOSPHOR BRONZE	SEE TABLE 1
2	ACTUATOR	LCP	UL94V-0, BEIGE
1	HOUSING	LCP	UL94V-0, BEIGE
NO	DISCRIPTION	MATERIAL	FINISH, REMARKS



Connector Assembly

PART NO.	Pos.	B	C	F	G	H
20599-009E-01	9P	1.80	2.40	3.60	4.20	3.00
20599-011E-01	11P	2.40	3.00	4.20	4.80	3.60
20599-013E-01	13P	3.00	3.60	4.80	5.40	4.20
20599-015E-01	15P	3.60	4.20	5.40	6.00	4.80
20599-017E-01	17P	4.20	4.80	6.00	6.60	5.40
20599-019E-01	19P	4.80	5.40	6.60	7.20	6.00
20599-021E-01	21P	5.40	6.00	7.20	7.80	6.60
20599-023E-01	23P	6.00	6.60	7.80	8.40	7.20
20599-025E-01	25P	6.60	7.20	8.40	9.00	7.80
20599-027E-01	27P	7.20	7.80	9.00	9.60	8.40
20599-029E-01	29P	7.80	8.40	9.60	10.20	9.00
20599-031E-01	31P	8.40	9.00	10.20	10.80	9.60
20599-033E-01	33P	9.00	9.60	10.80	11.40	10.20
20599-035E-01	35P	9.60	10.20	11.40	12.00	10.80
20599-037E-01	37P	10.20	10.80	12.00	12.60	11.40


NOTES
2. SOLDER RESIST SHALL BE APPLIED TO PREVENT SHORT CIRCUITS WHEN PLACING SIGNAL LINES ON GROUND AREA.

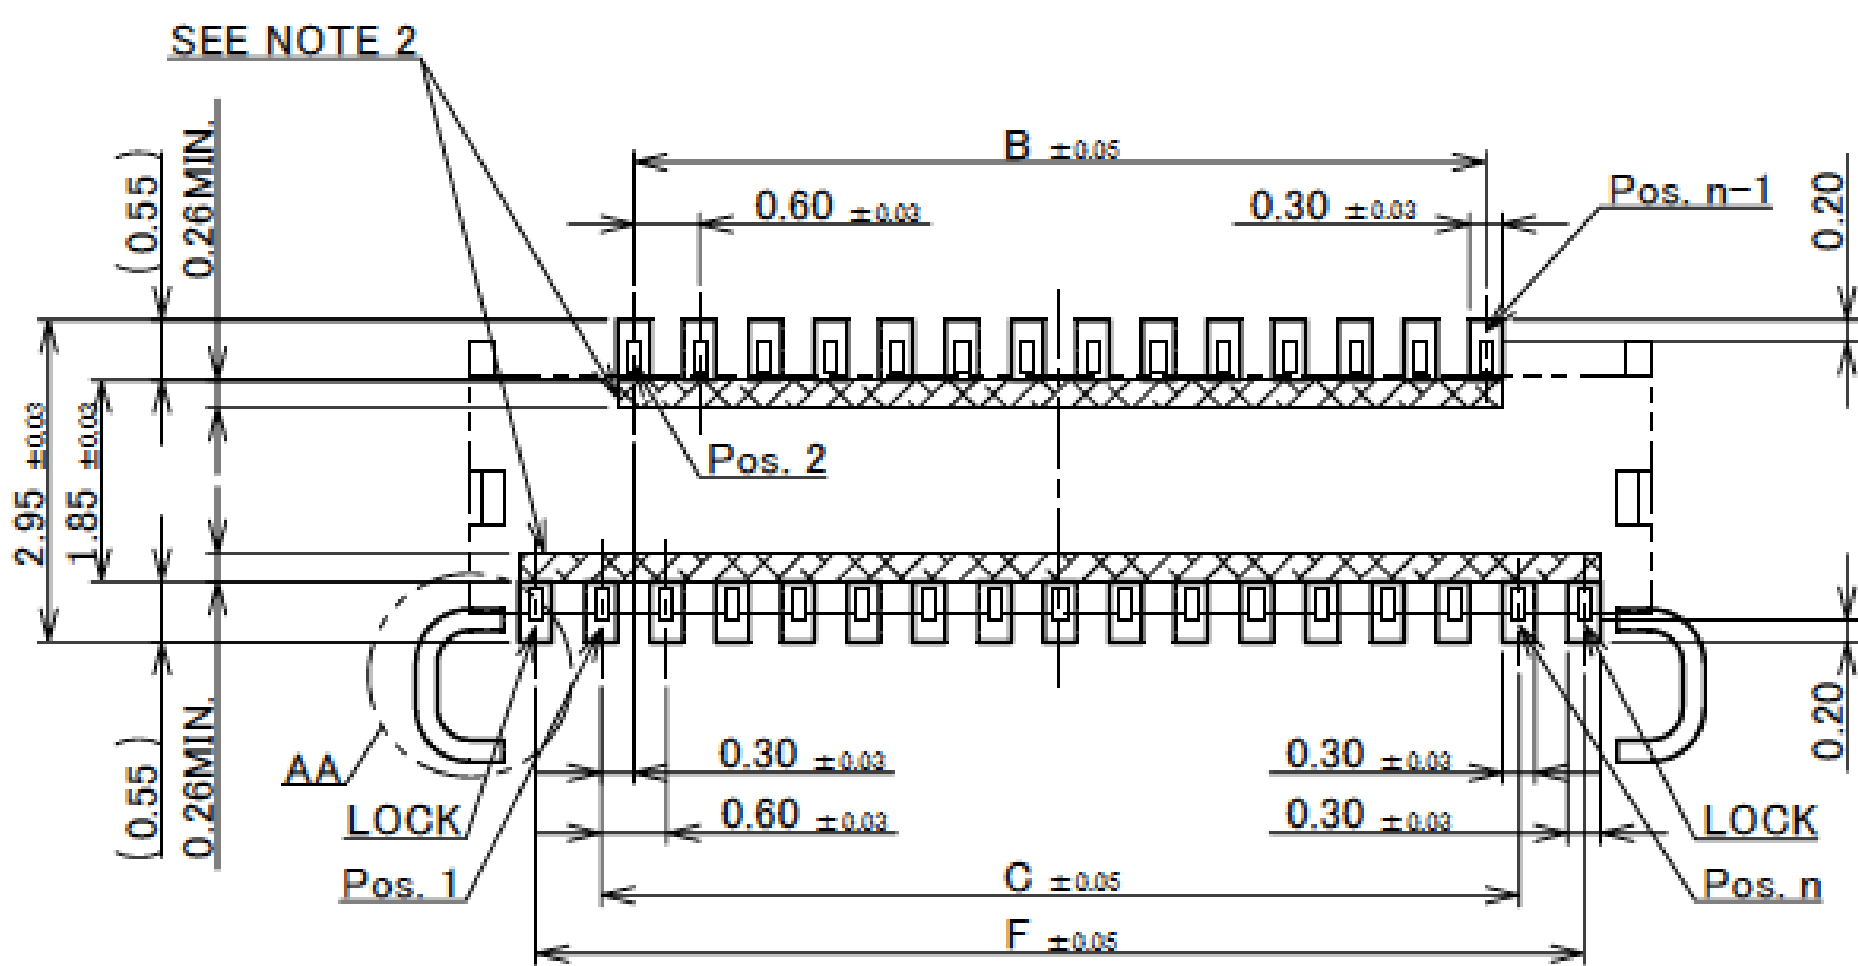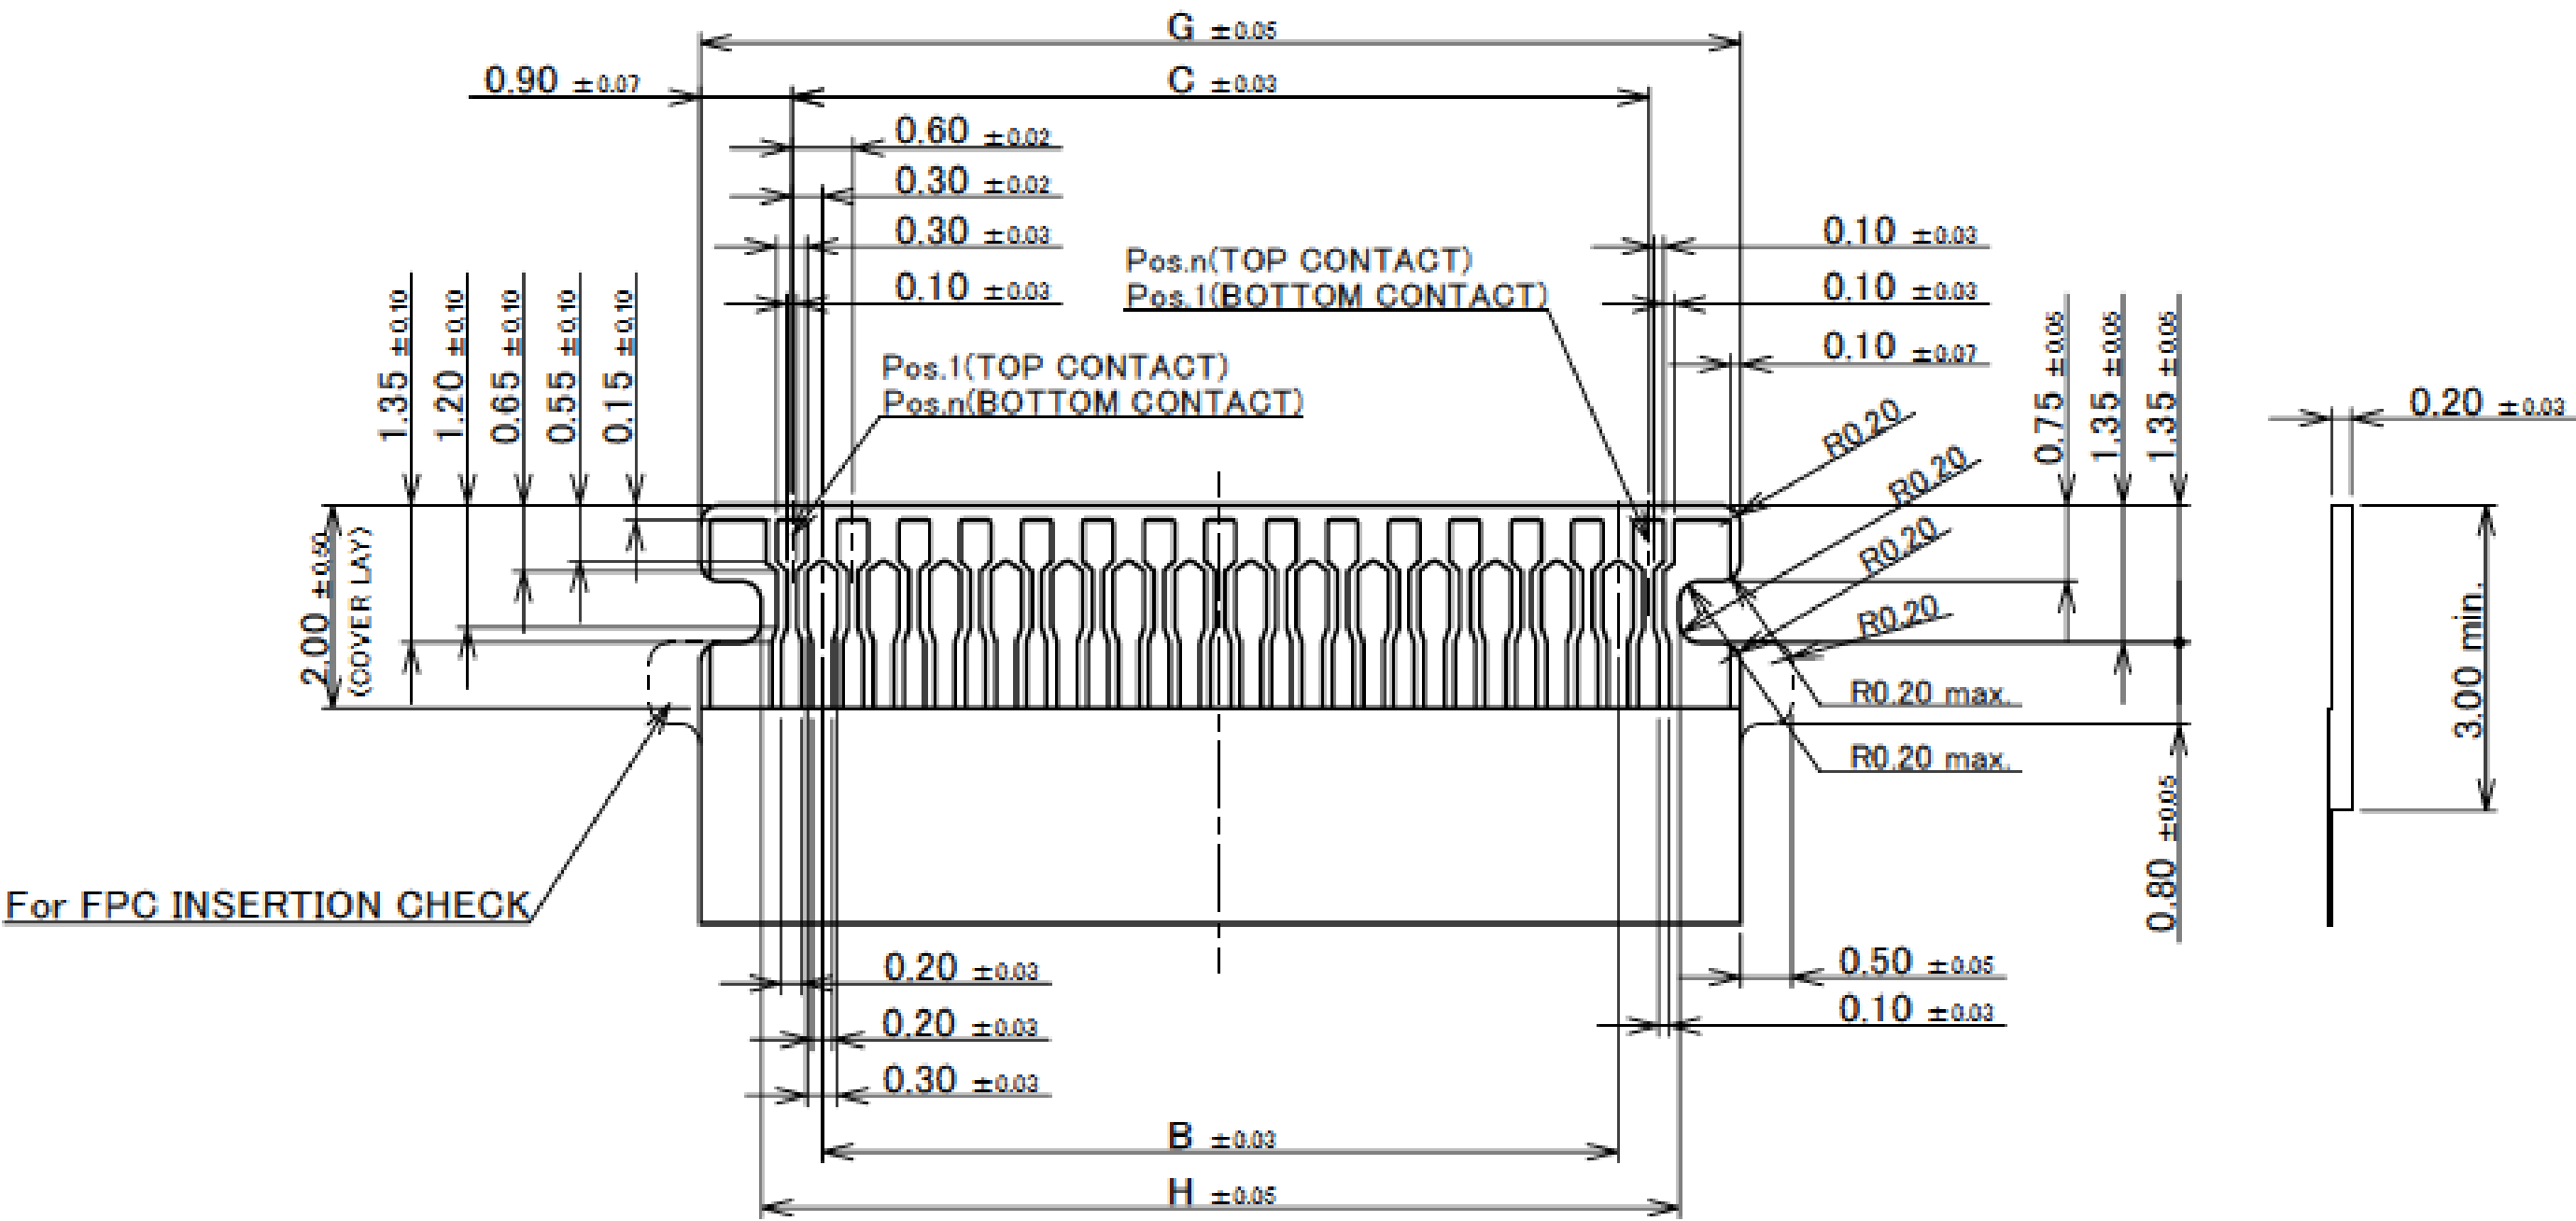

RECOMMENDED PCB LAYOUT & METAL MASK LAYOUT
METAL MASK THICKNESS : t=0.12mm

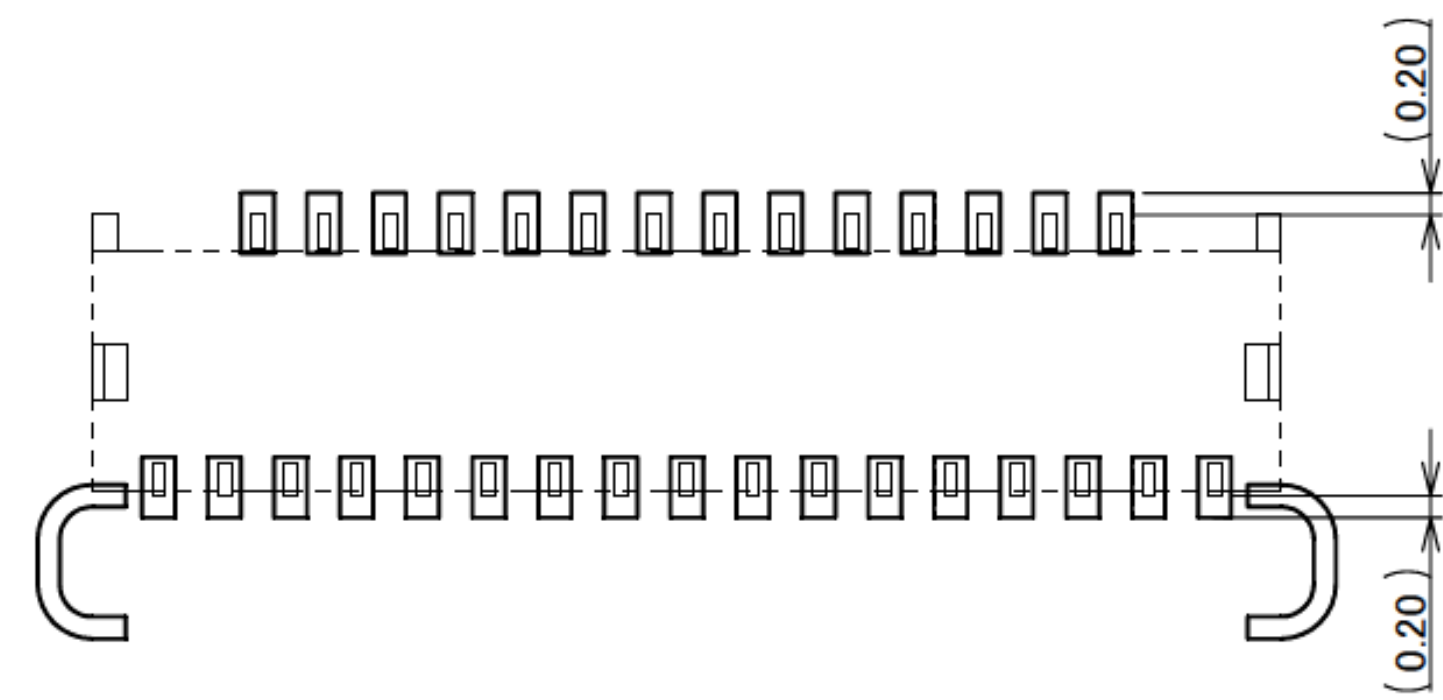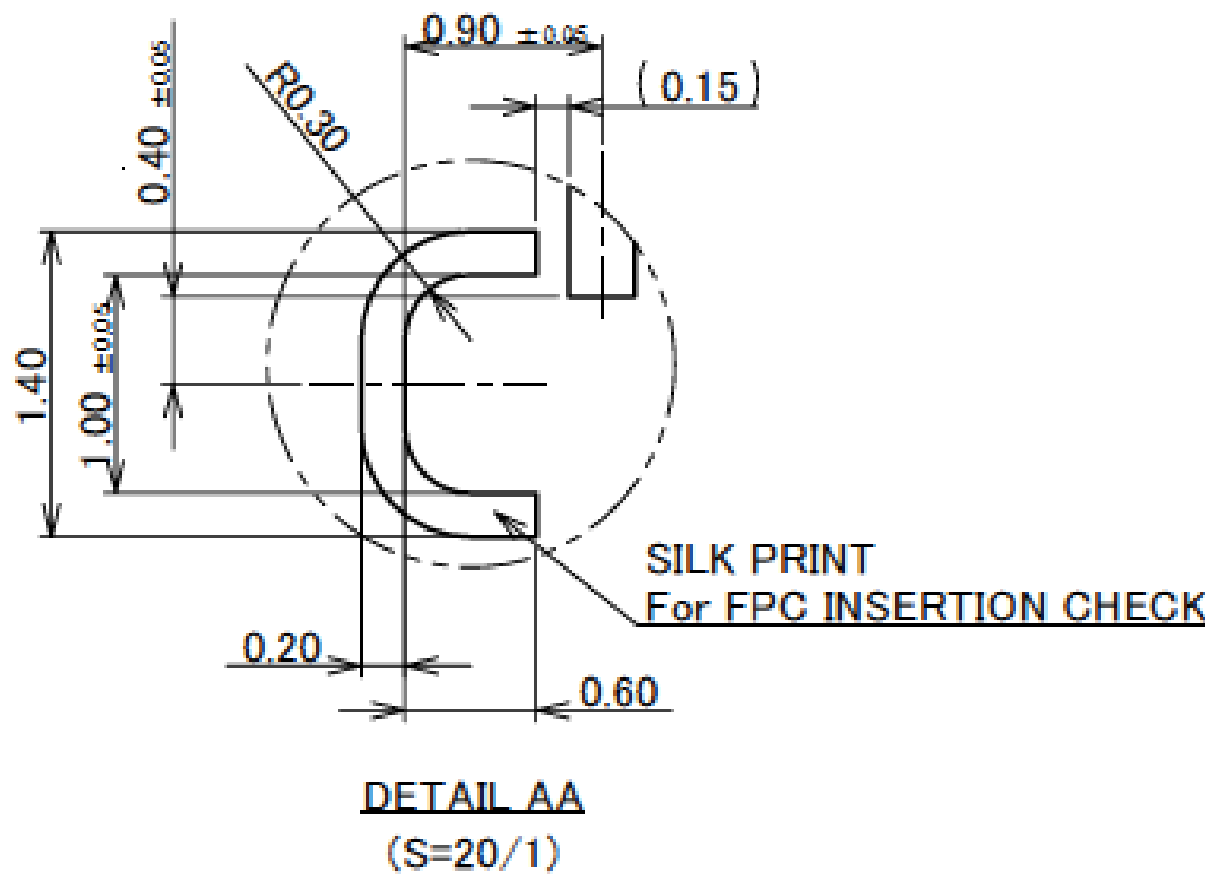

CONNECTOR ON RECOMMENDED PCB LAYOUT

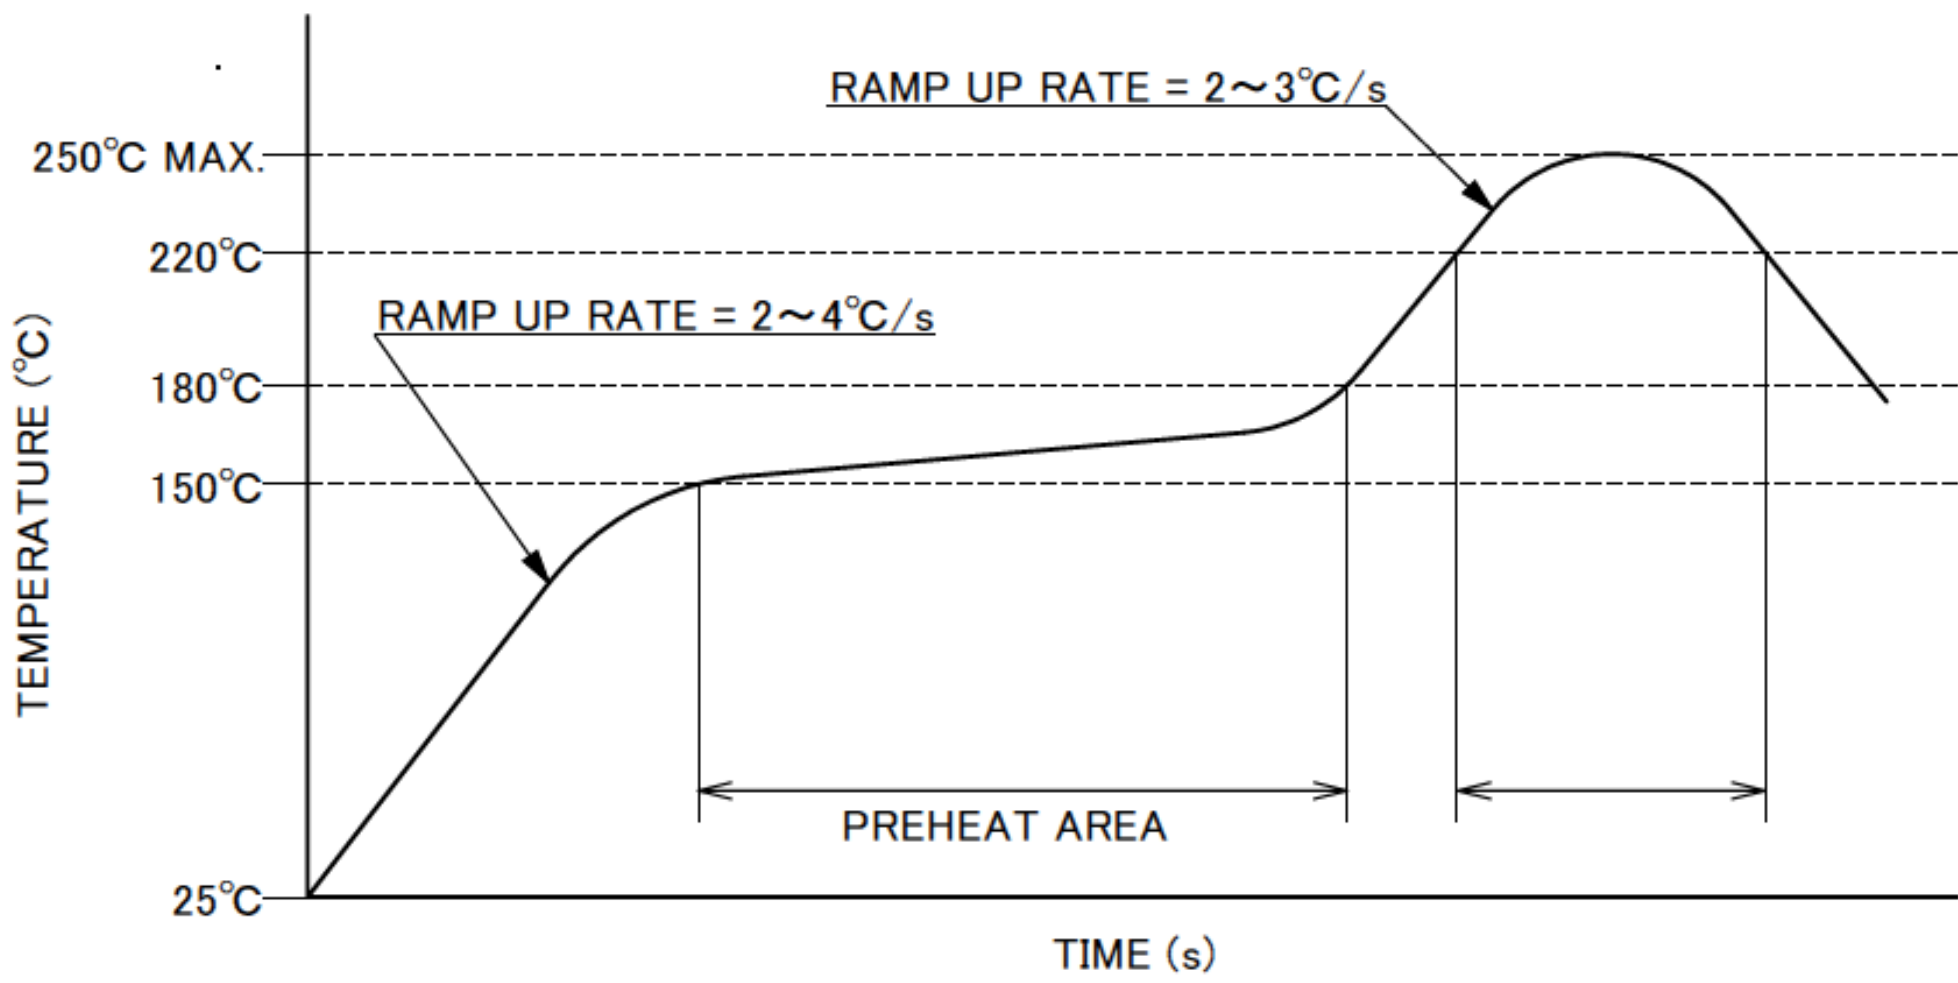

REFLOW TEMPERATURE PROFILE
SENJU METAL INDUSTRY CO., LTD. : M705-SHF(Sn96.5 Ag3.0 Cu0.5)



Connector Assembly

ITEMS	SPECIFICATION
RATING VOLTAGE	50V AC/DC (PER CONTACT)
RATING AMPERAGE	0.3A DC (PER CONTACT)
OPERATING TEMPERATURE	233~358K(-40℃~85℃)
OPERATING HUMIDITY	20~80%RH (NON-CONDENSING)
CONTACT RESISTANCE	INITIAL : 60mohm MAX. / AFTER TEST : $\triangleleft$ 40mohm MAX.
INSULATION RESISTANCE	100Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC250V 1min
DURABILITY	20TH CYCLES
ACTUATOR LOCKING FORCE (INITIAL / 20TH CYCLES)	INITIAL / 20TH CYCLES : 0.3N(31gf) × (n + 2) MAX.
ACTUATOR UNLOCKING FORCE (INITIAL / 20TH CYCLES)	INITIAL / 20TH CYCLES : 0.02N(2gf) × (n + 2) MIN.
FPC RETENTION FORCE (INITIAL / AFTER TEST)	INITIAL : 0.13N(13gf) × n + 1.0N MIN. / AFTER TEST : 0.10N(10gf) × n + 1.0N MIN.
COPLANARITY	0.10 MAX.
PRODUCT SPECIFICATION	PRS-1861
TEST REPORT	TR-13085
PACKING STANDARD	PST-13035
INSTRUCTION MANUAL	HIM-12007
APPEARANCE CRITERIA No.	QLS-A***

※ “n” IS THE NUMBER OF PIN

Recommended P/N 20584-0**E-01

ODD NUMBER POS.

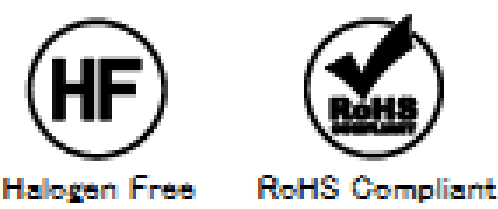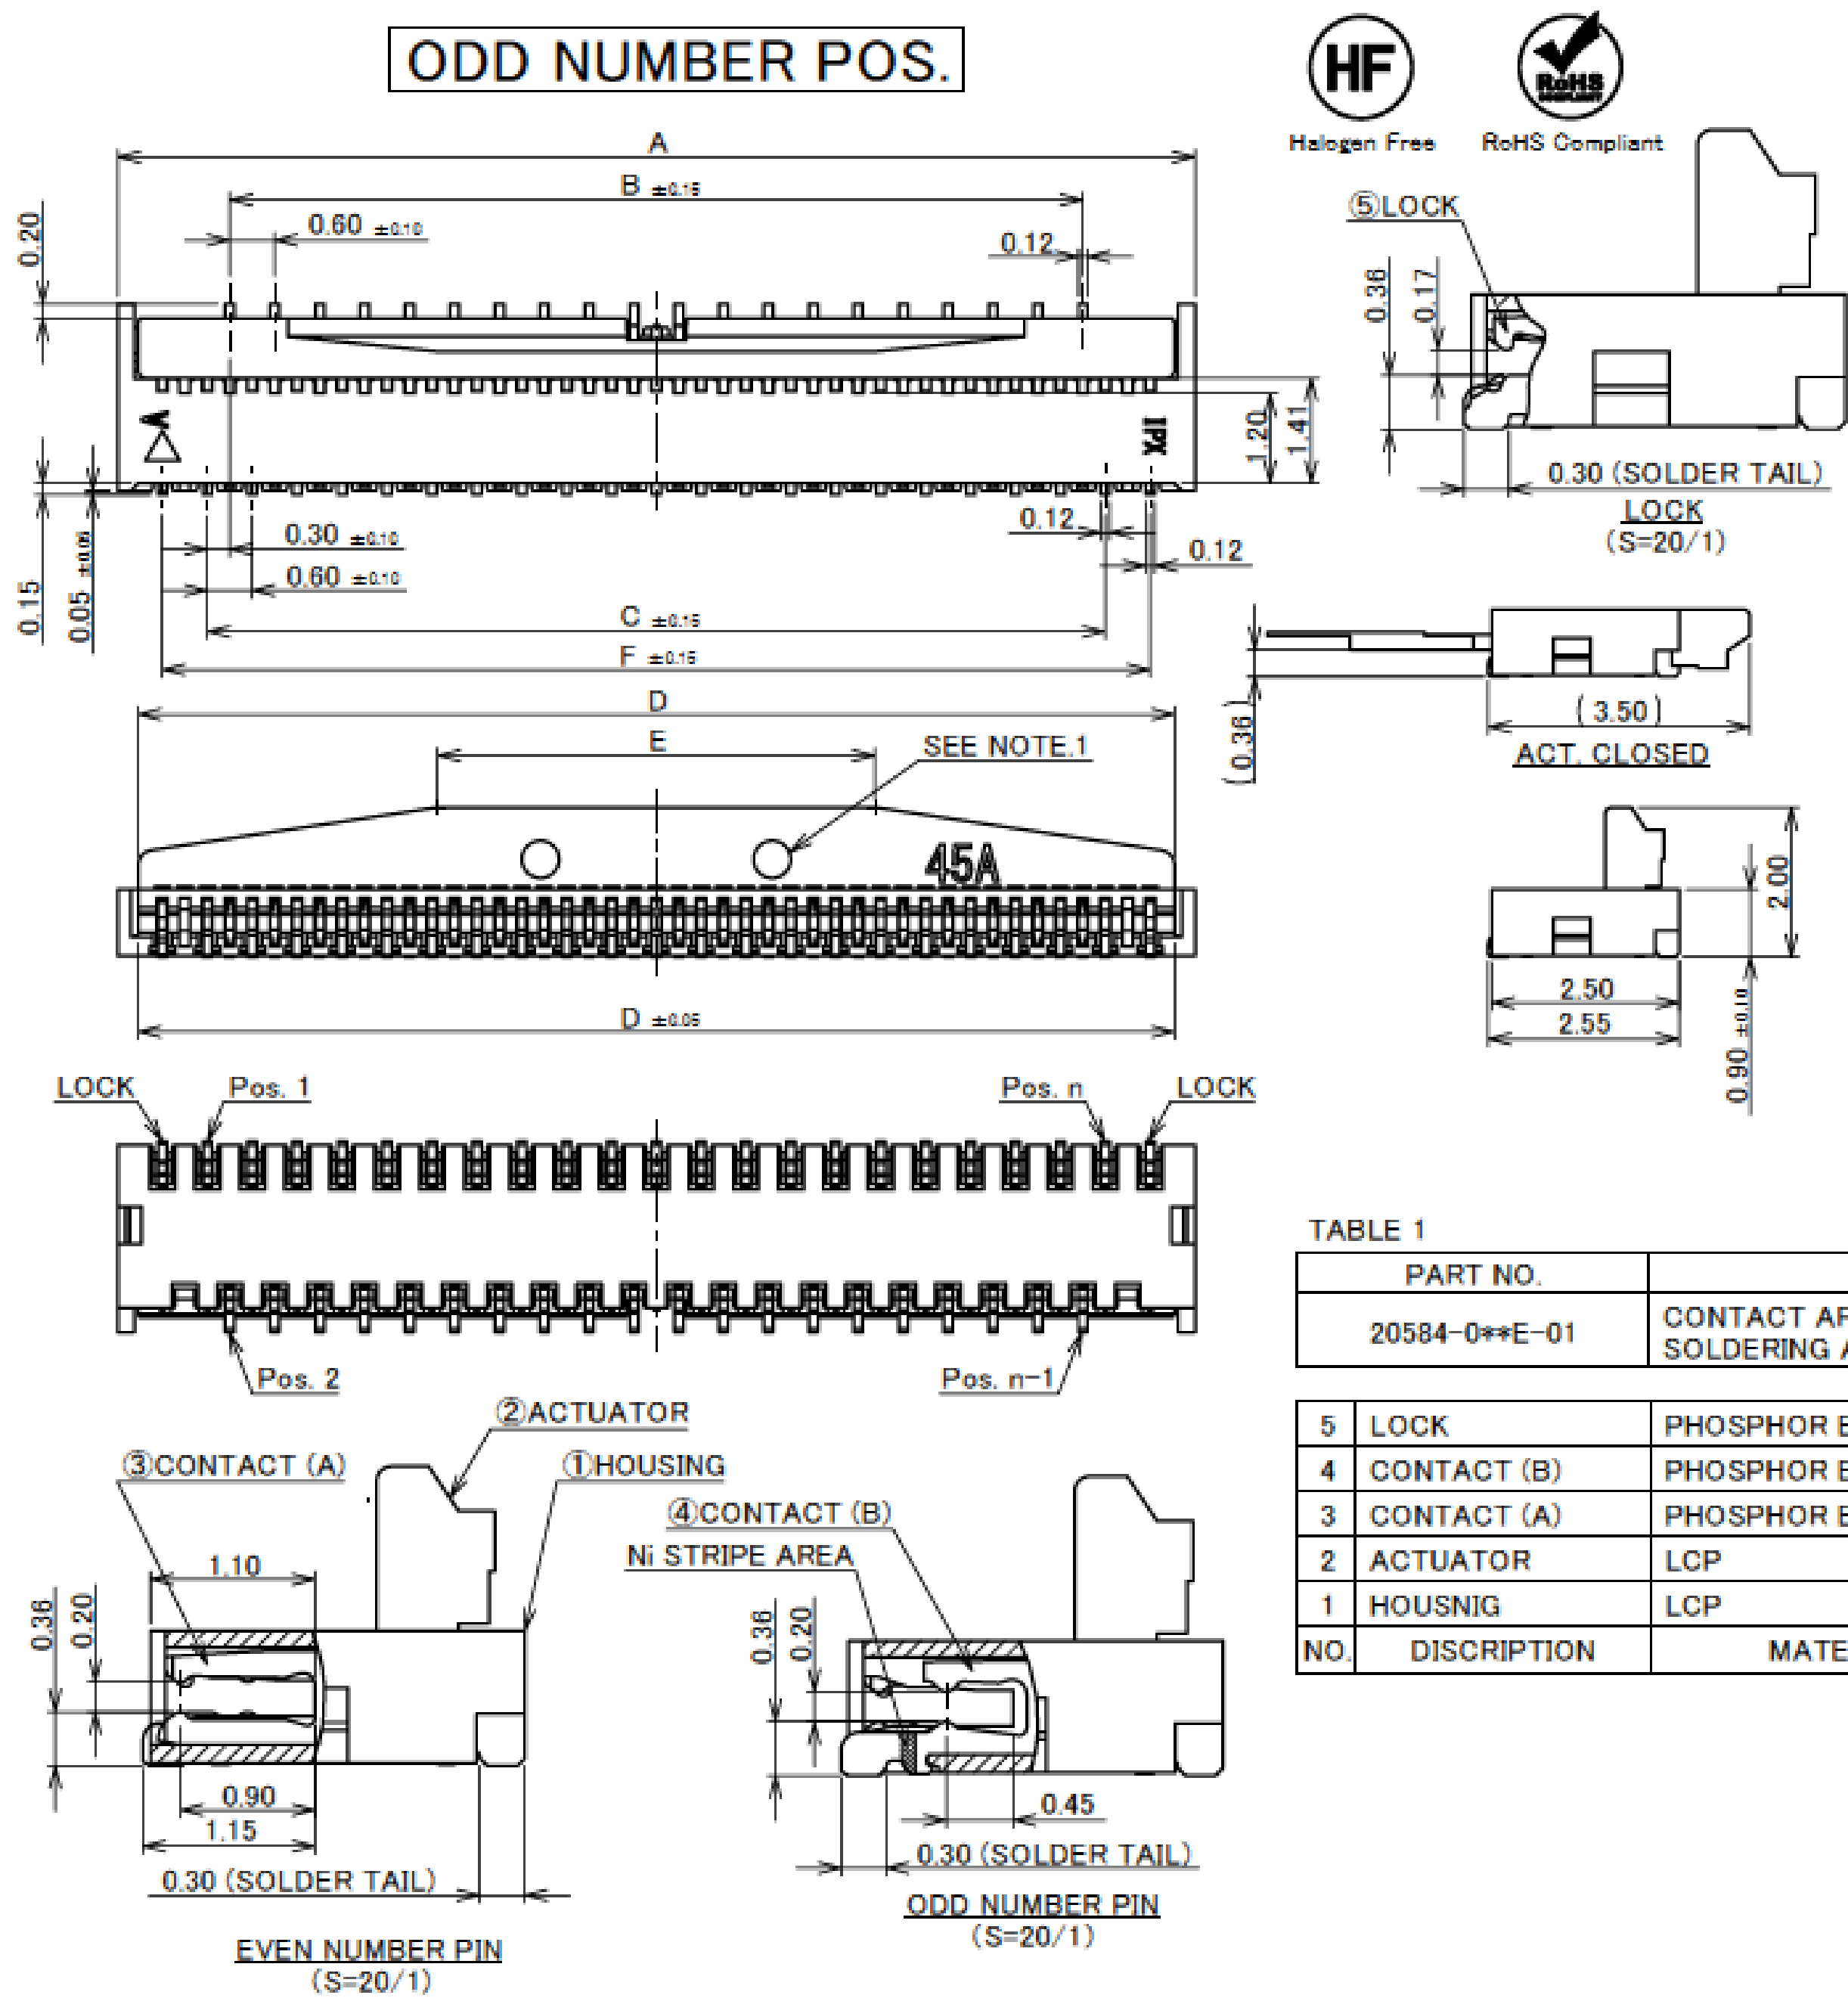

PART NO.	Pos.	A	B	C	D	E	F
◆ 20584-029E-01	29P	10.80	7.80	8.40	10.25	6.25	9.60
◆ 20584-031E-01	31P	11.40	8.40	9.00	10.85	6.85	10.20
◆ 20584-035E-01	35P	12.60	9.60	10.20	12.05	8.05	11.40
◆ 20584-037E-01	37P	13.20	10.20	10.80	12.65	4.65	12.00
◆ 20584-039E-01	39P	13.80	10.80	11.40	13.25	5.25	12.60
◆ 20584-041E-01	41P	14.40	11.40	12.00	13.85	5.85	13.20
◆ 20584-045E-01	45P	15.60	12.60	13.20	15.05	7.05	14.40
◆ 20584-047E-01	47P	16.20	13.20	13.80	15.65	7.65	15.00
◆ 20584-051E-01	51P	17.40	14.40	15.00	16.85	8.85	16.20
◆ 20584-053E-01	53P	18.00	15.00	15.60	17.45	9.45	16.80
◆ 20584-057E-01	57P	19.20	16.20	16.80	18.65	10.65	18.00
◆ 20584-061E-01	61P	20.40	17.40	18.00	19.85	11.85	19.20
◆ 20584-063E-01	63P	21.00	18.00	18.60	20.45	8.45	19.80
◆ 20584-071E-01	71P	23.40	20.40	21.00	22.85	10.85	22.20

◆ MARK MEANS NOT AVAILABLE.

NOTES.


1. THIS DENT SHAPE IS PURPOSED FOR GOOD INJECTION QUALITY. THIS DENT SHAPE WILL NOT AFFECT CONNECTR FUNCTION. DENT SHAPE SHOWN ON DRAWING IS JUST FOR REFERENCE. DENT SHAPE AND QUANTITY MIGHT CHABGE FROM DIFFERENT PIN COUNT AND DIFFERENT TOOLING.
2. CONTACT POINT: TOP AND BOTTOM CONTACT

CAUTION VISIT OUR WEBSITE FOR LATEST VERSIONS OF INSTRUCTION MANUAL NO. HIM-12007 TO HANDLE THE PRODUCT PROPERLY AND SAFELY.

TABLE 1




PART NO.	FINISH	
20584-0**E-01	CONTACT AREA : Au 0.10 μm MIN. OVER Ni 1.00 μm MIN. SOLDERING AREA : Au 0.03 μm MIN. OVER Ni 1.00 μm MIN.	
5	LOCK	PHOSPHOR BRONZE
4	CONTACT (B)	PHOSPHOR BRONZE
3	CONTACT (A)	PHOSPHOR BRONZE
2	ACTUATOR	LCP
1	HOUSNIG	LCP
NO.	DISCRIPTION	MATERIAL
		FINISH , REMARKS

Connector Assembly

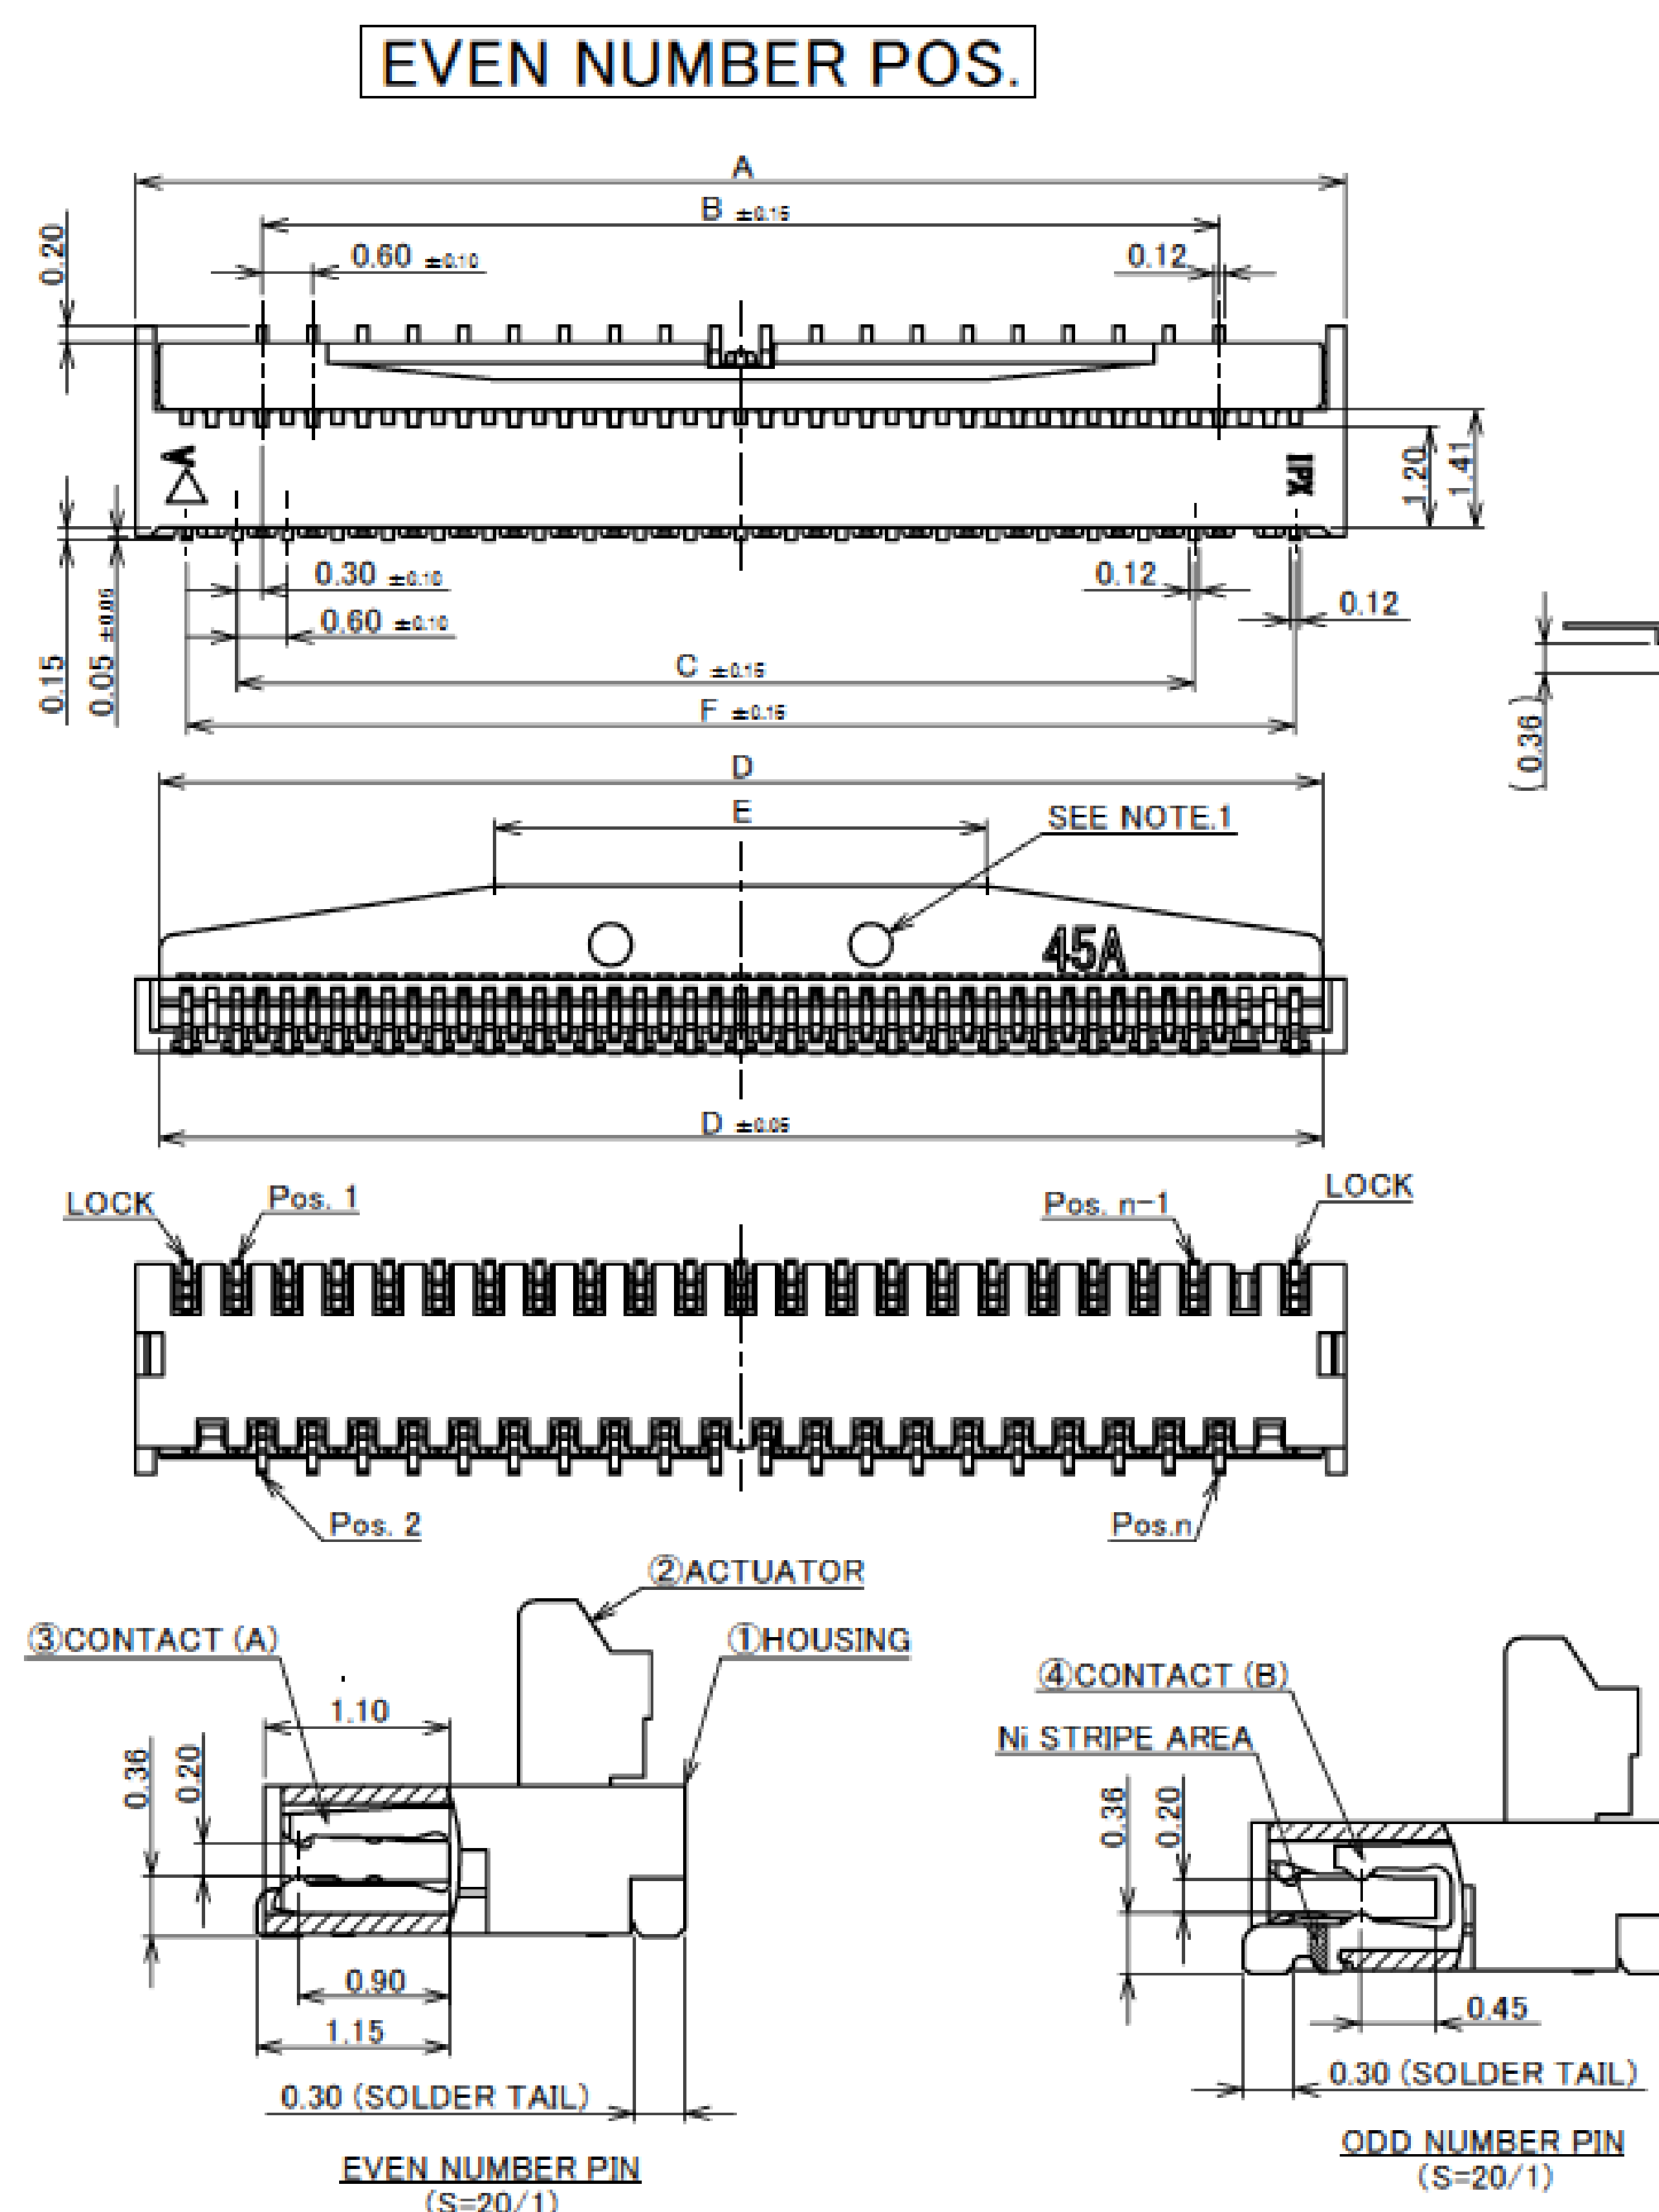


	PART NO.	Pos.	A	B	C	D	E	F
◆	20584-030E-01	30P	11.40	8.40	8.40	10.85	6.85	10.20
◆	20584-034E-01	34P	12.60	9.60	9.60	12.05	8.05	11.40
◆	20584-038E-01	38P	13.80	10.80	10.80	13.25	5.25	12.60
◆	20584-040E-01	40P	14.40	11.40	11.40	13.85	5.85	13.20
◆	20584-050E-01	50P	17.40	14.40	14.40	16.85	8.85	16.20
◆	20584-056E-01	56P	19.20	16.20	16.20	18.65	10.65	18.00

◆ MARK MEANS NOT AVAILABLE.

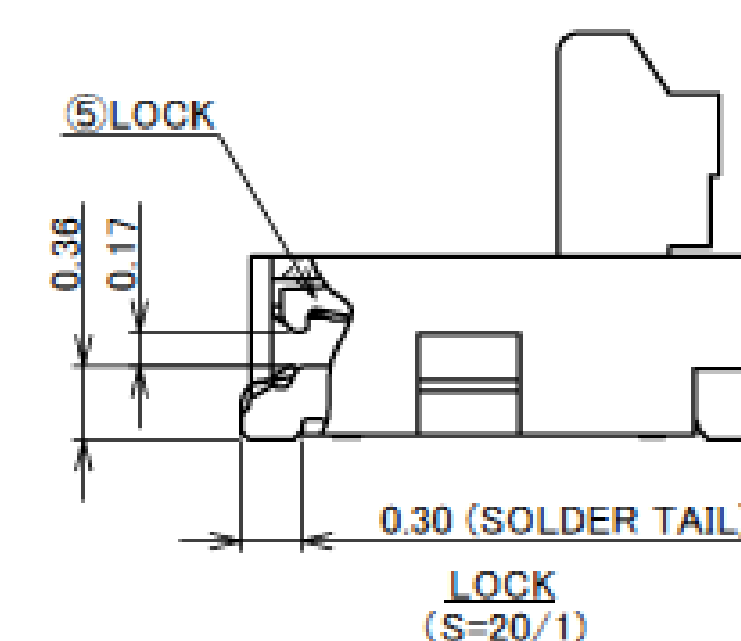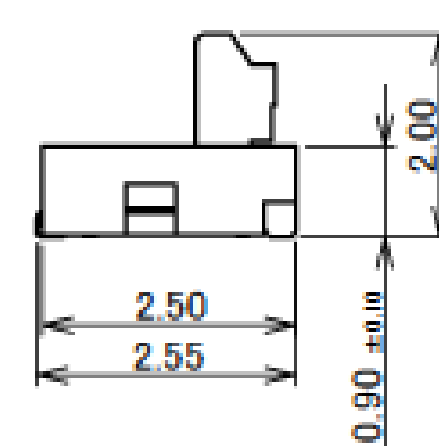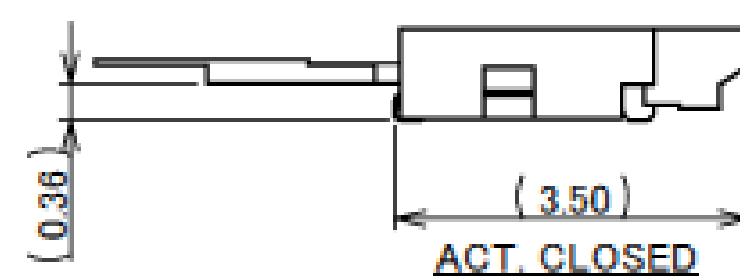

Rev.18

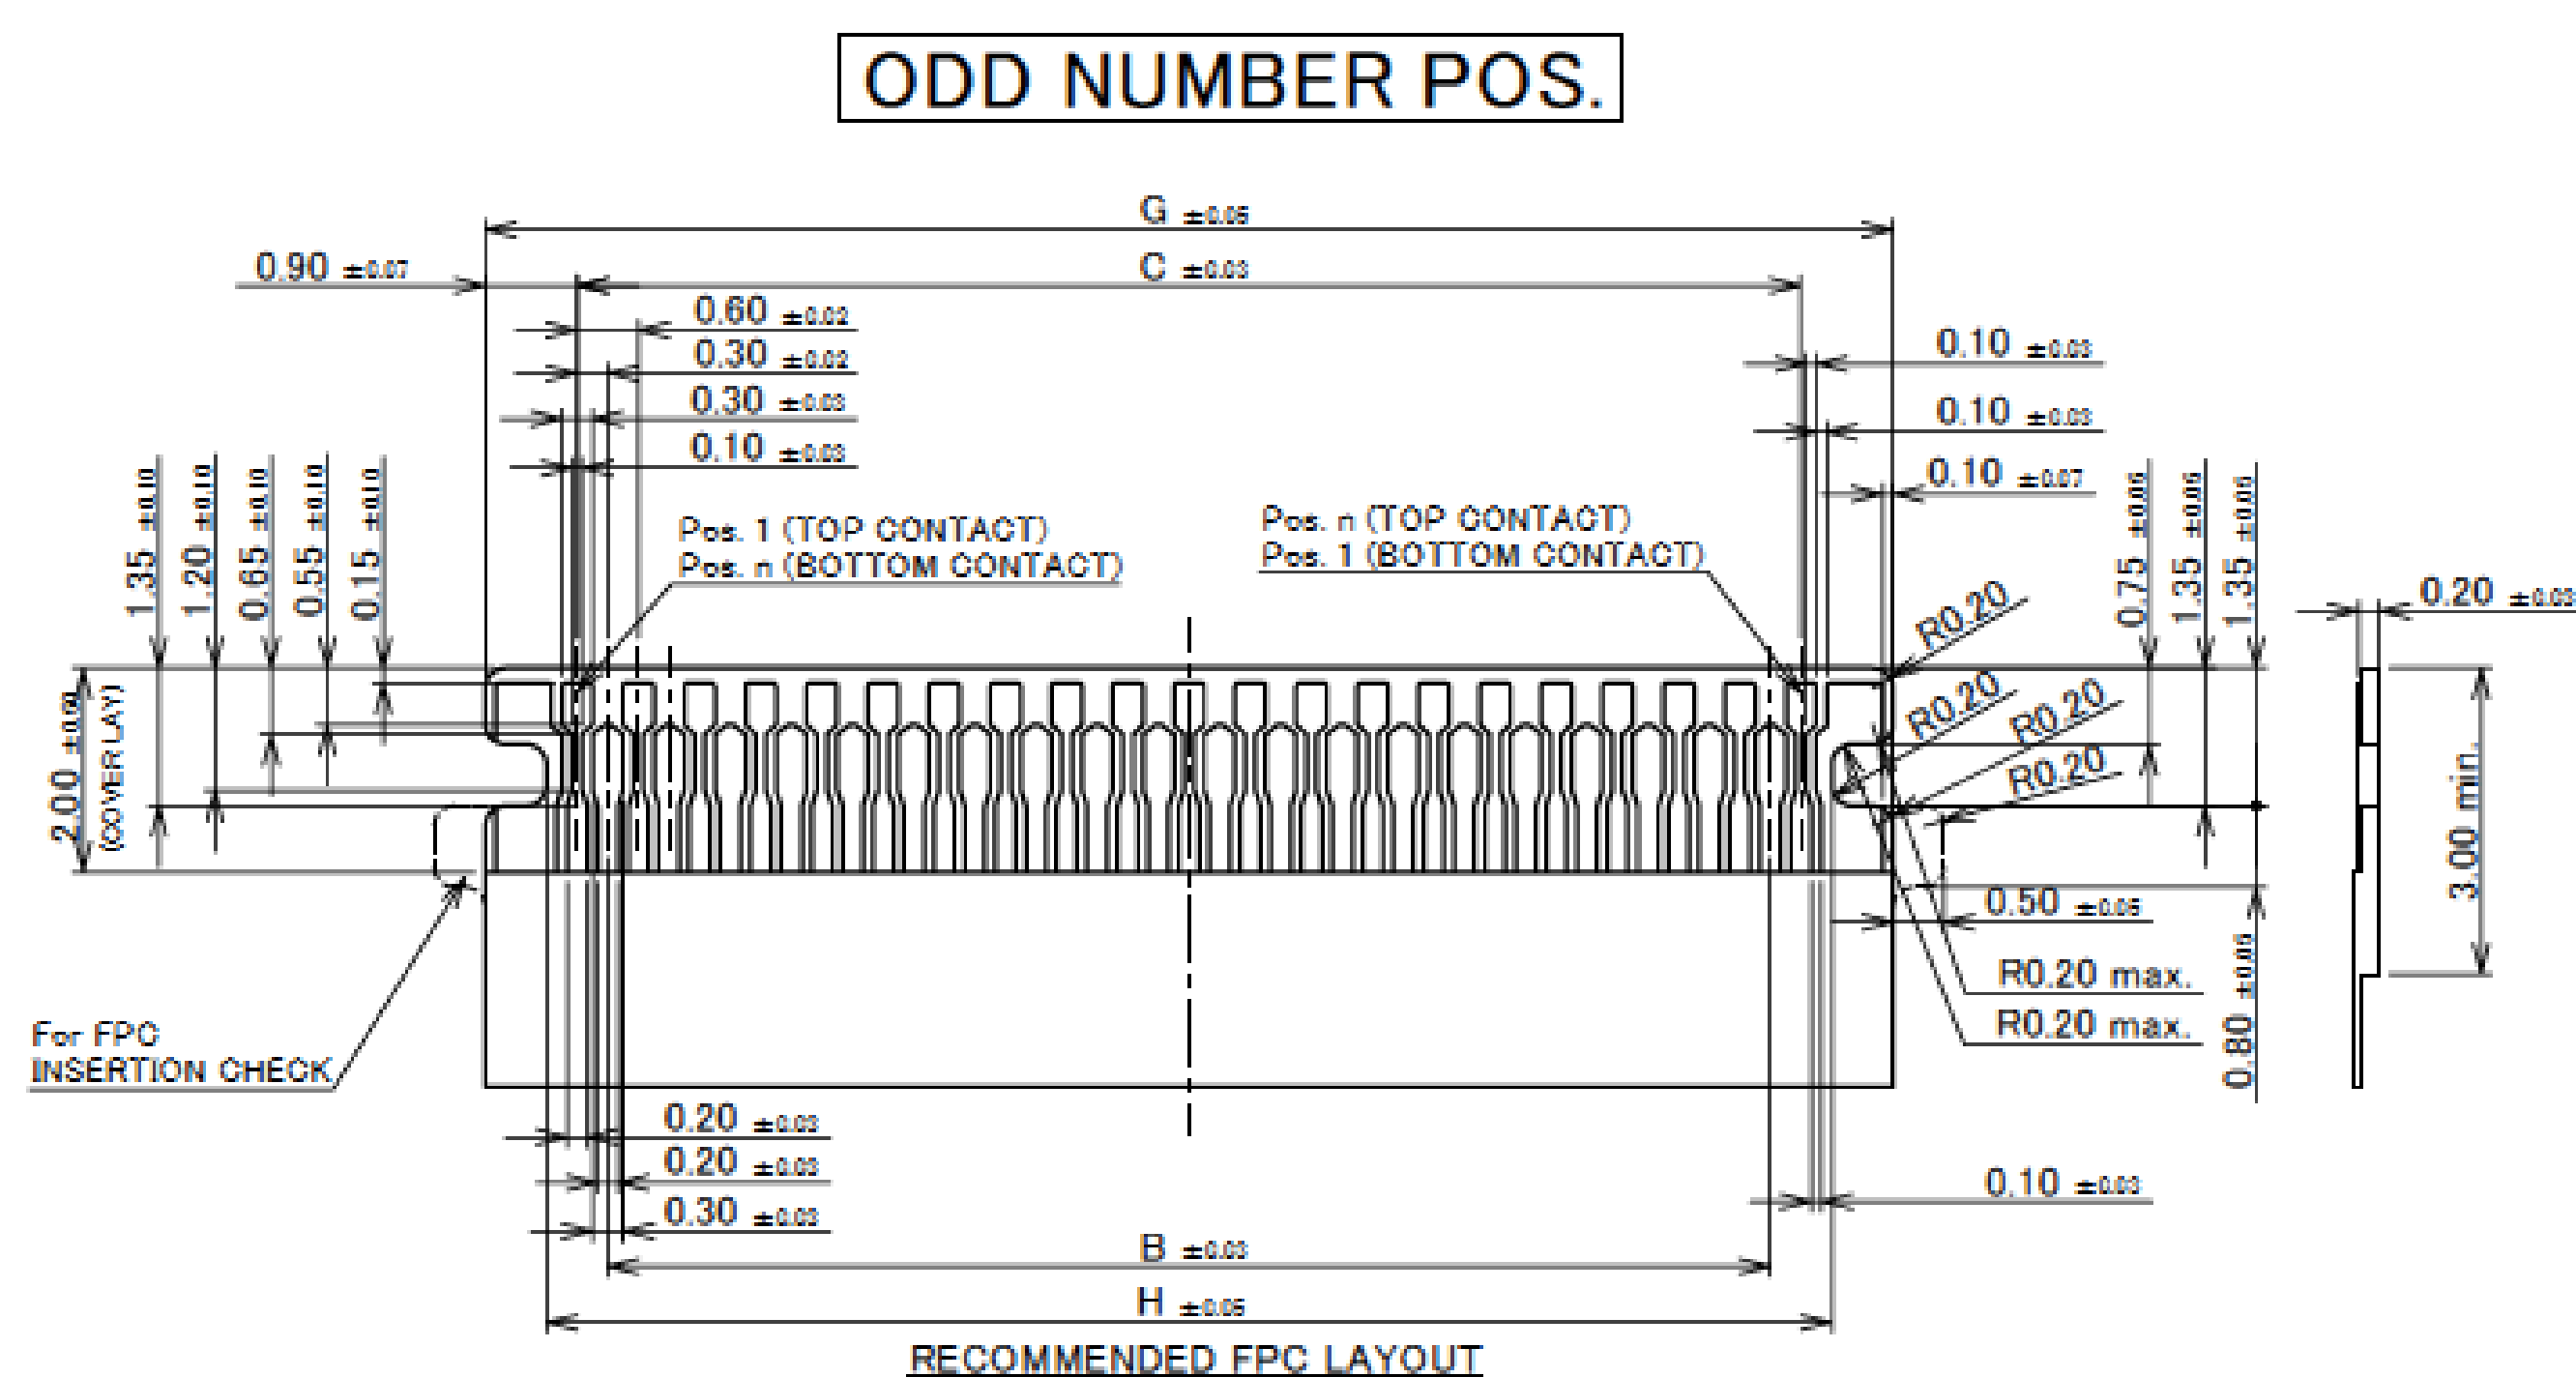

	PART NO.	Pos.	B	C	F	G	H
◆	20584-029E-01	29P	7.80	8.40	9.60	10.20	9.00
◆	20584-031E-01	31P	8.40	9.00	10.20	10.80	9.60
◆	20584-035E-01	35P	9.60	10.20	11.40	12.00	10.80
◆	20584-037E-01	37P	10.20	10.80	12.00	12.60	11.40
◆	20584-039E-01	39P	10.80	11.40	12.60	13.20	12.00
◆	20584-041E-01	41P	11.40	12.00	13.20	13.80	12.60
◆	20584-045E-01	45P	12.60	13.20	14.40	15.00	13.80
◆	20584-047E-01	47P	13.20	13.80	15.00	15.60	14.40
	20584-051E-01	51P	14.40	15.00	16.20	16.80	15.60
	20584-053E-01	53P	15.00	15.60	16.80	17.40	16.20
	20584-057E-01	57P	16.20	16.80	18.00	18.60	17.40
	20584-061E-01	61P	17.40	18.00	19.20	19.80	18.60
◆	20584-063E-01	63P	18.00	18.60	19.80	20.40	19.20
	20584-071E-01	71P	20.40	21.00	22.20	22.80	21.60

◆ MARK MEANS NOT AVAILABLE.

NOTES

3. MATERIAL

COVER FILM : PI

CONDUCTOR : COPPER(RARE)

BASE FILM : P1



STIFFENER : PI

ADHESIVE: THERMOSETTING ADHESIVE

4. FINISH


Au OVER Ni UNDER PLATING.

5. SOLDER RESIST SHALL BE APPLIED TO PREVENT SHORT CIRCUITS WHEN PLACING SIGNAL LINES ON GROUND AREA.

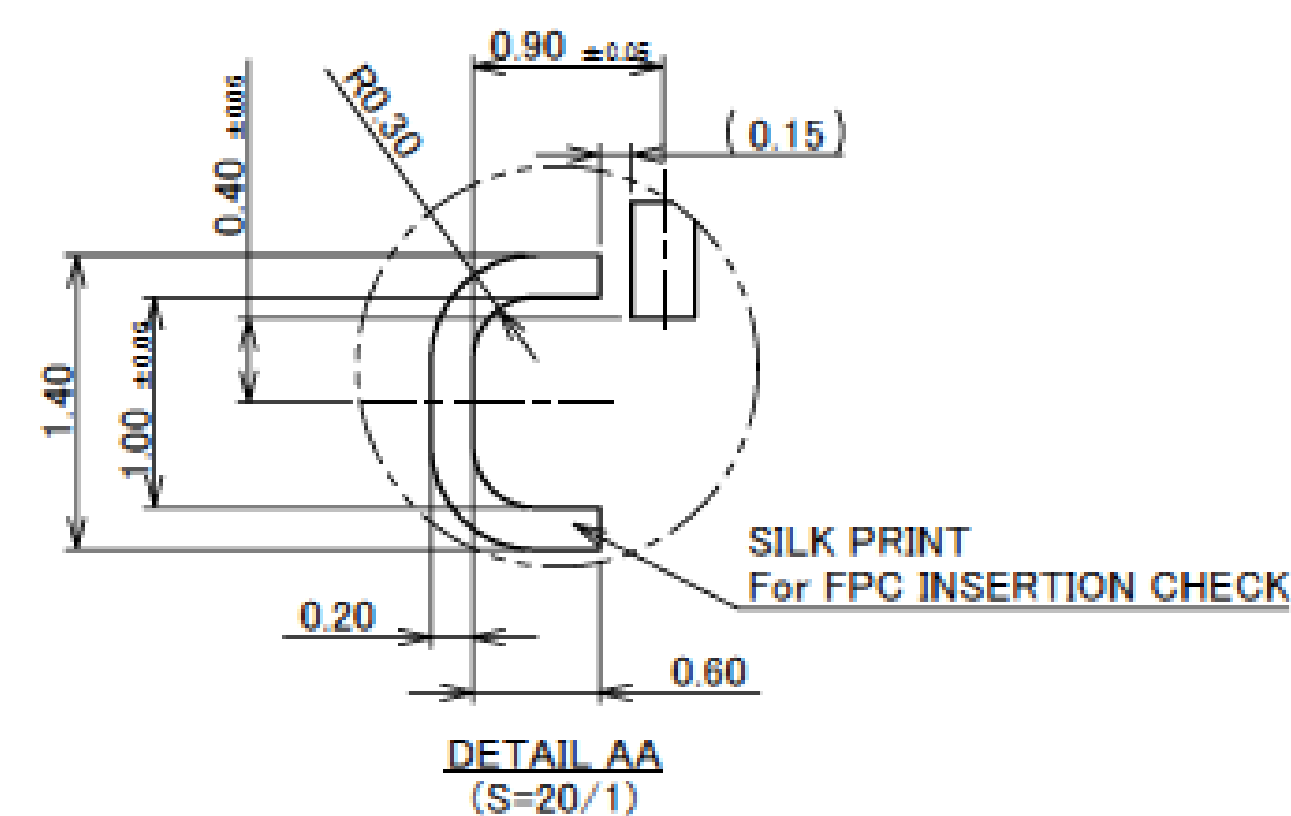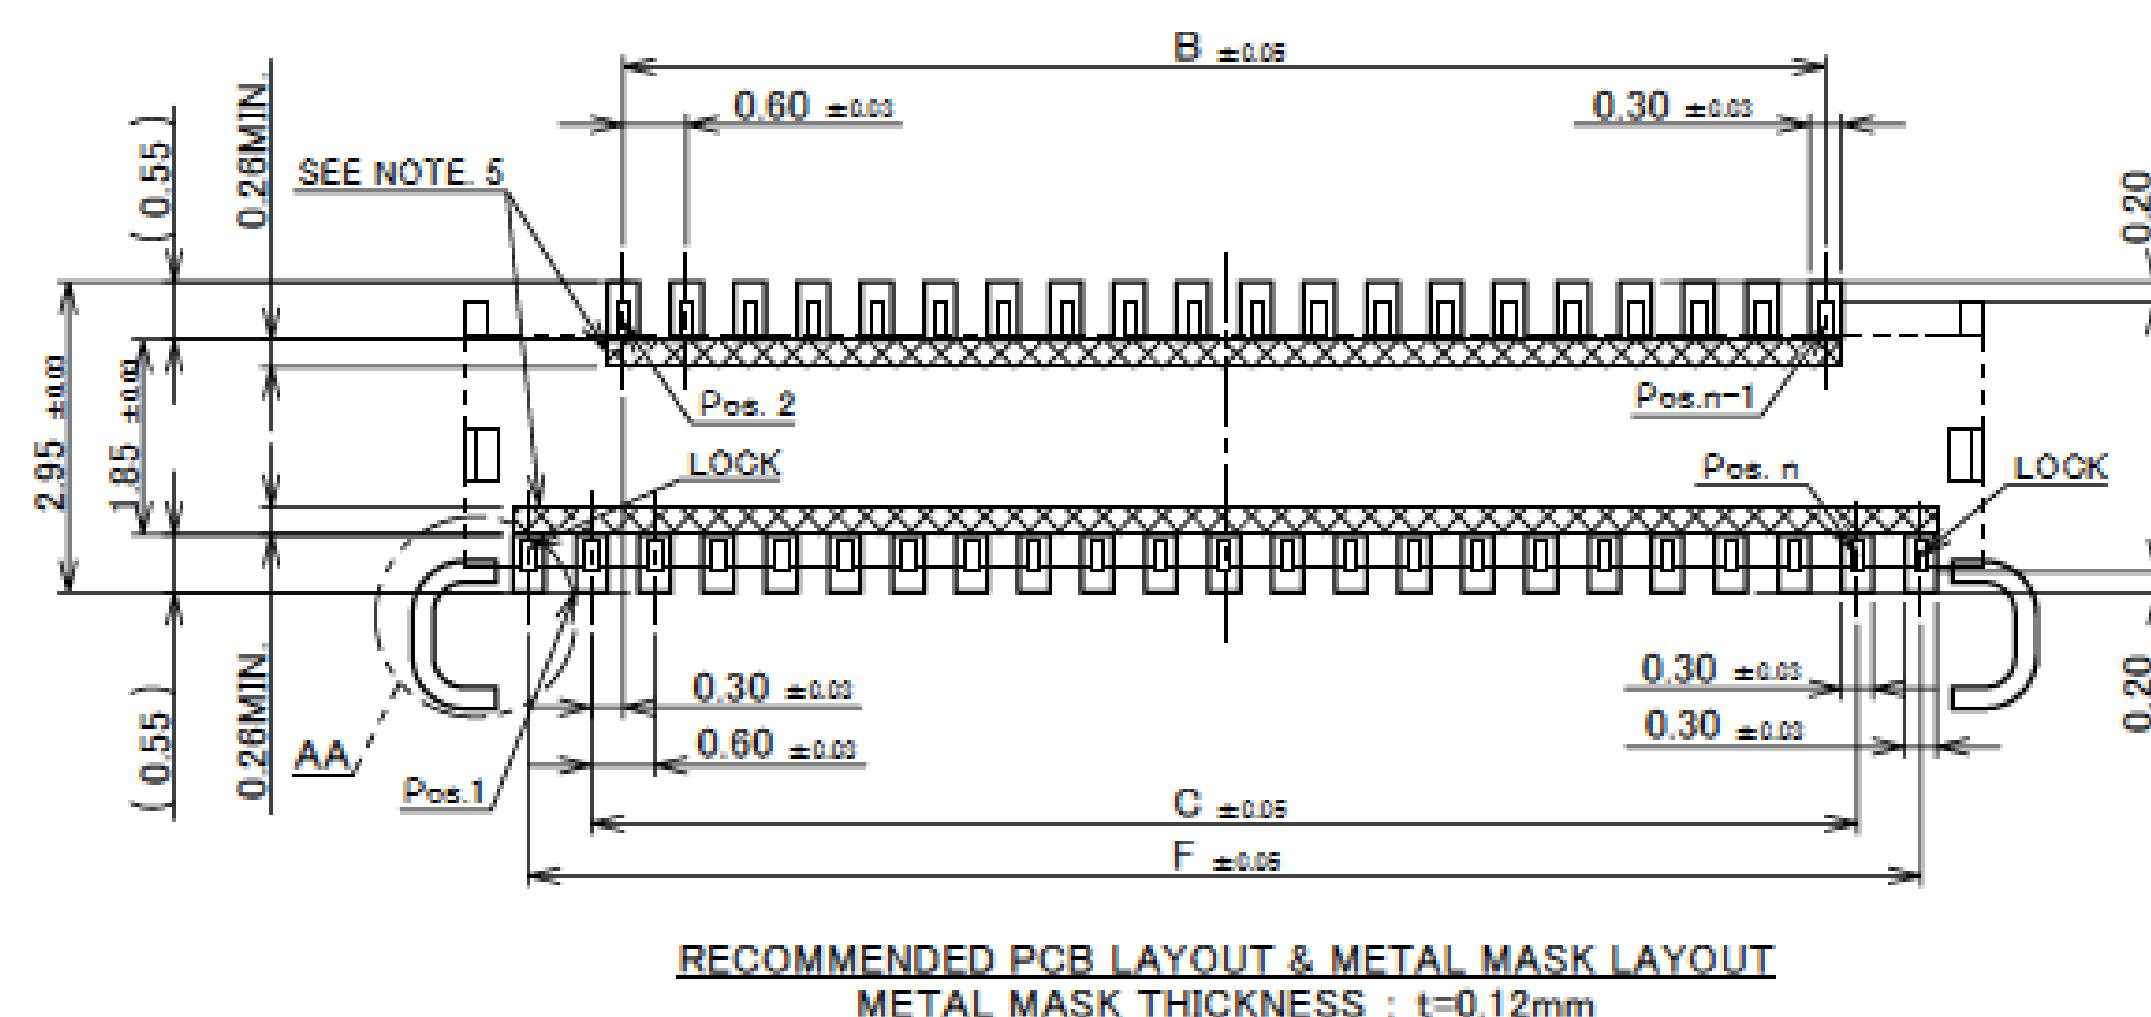


Rev.18


Connector Assembly

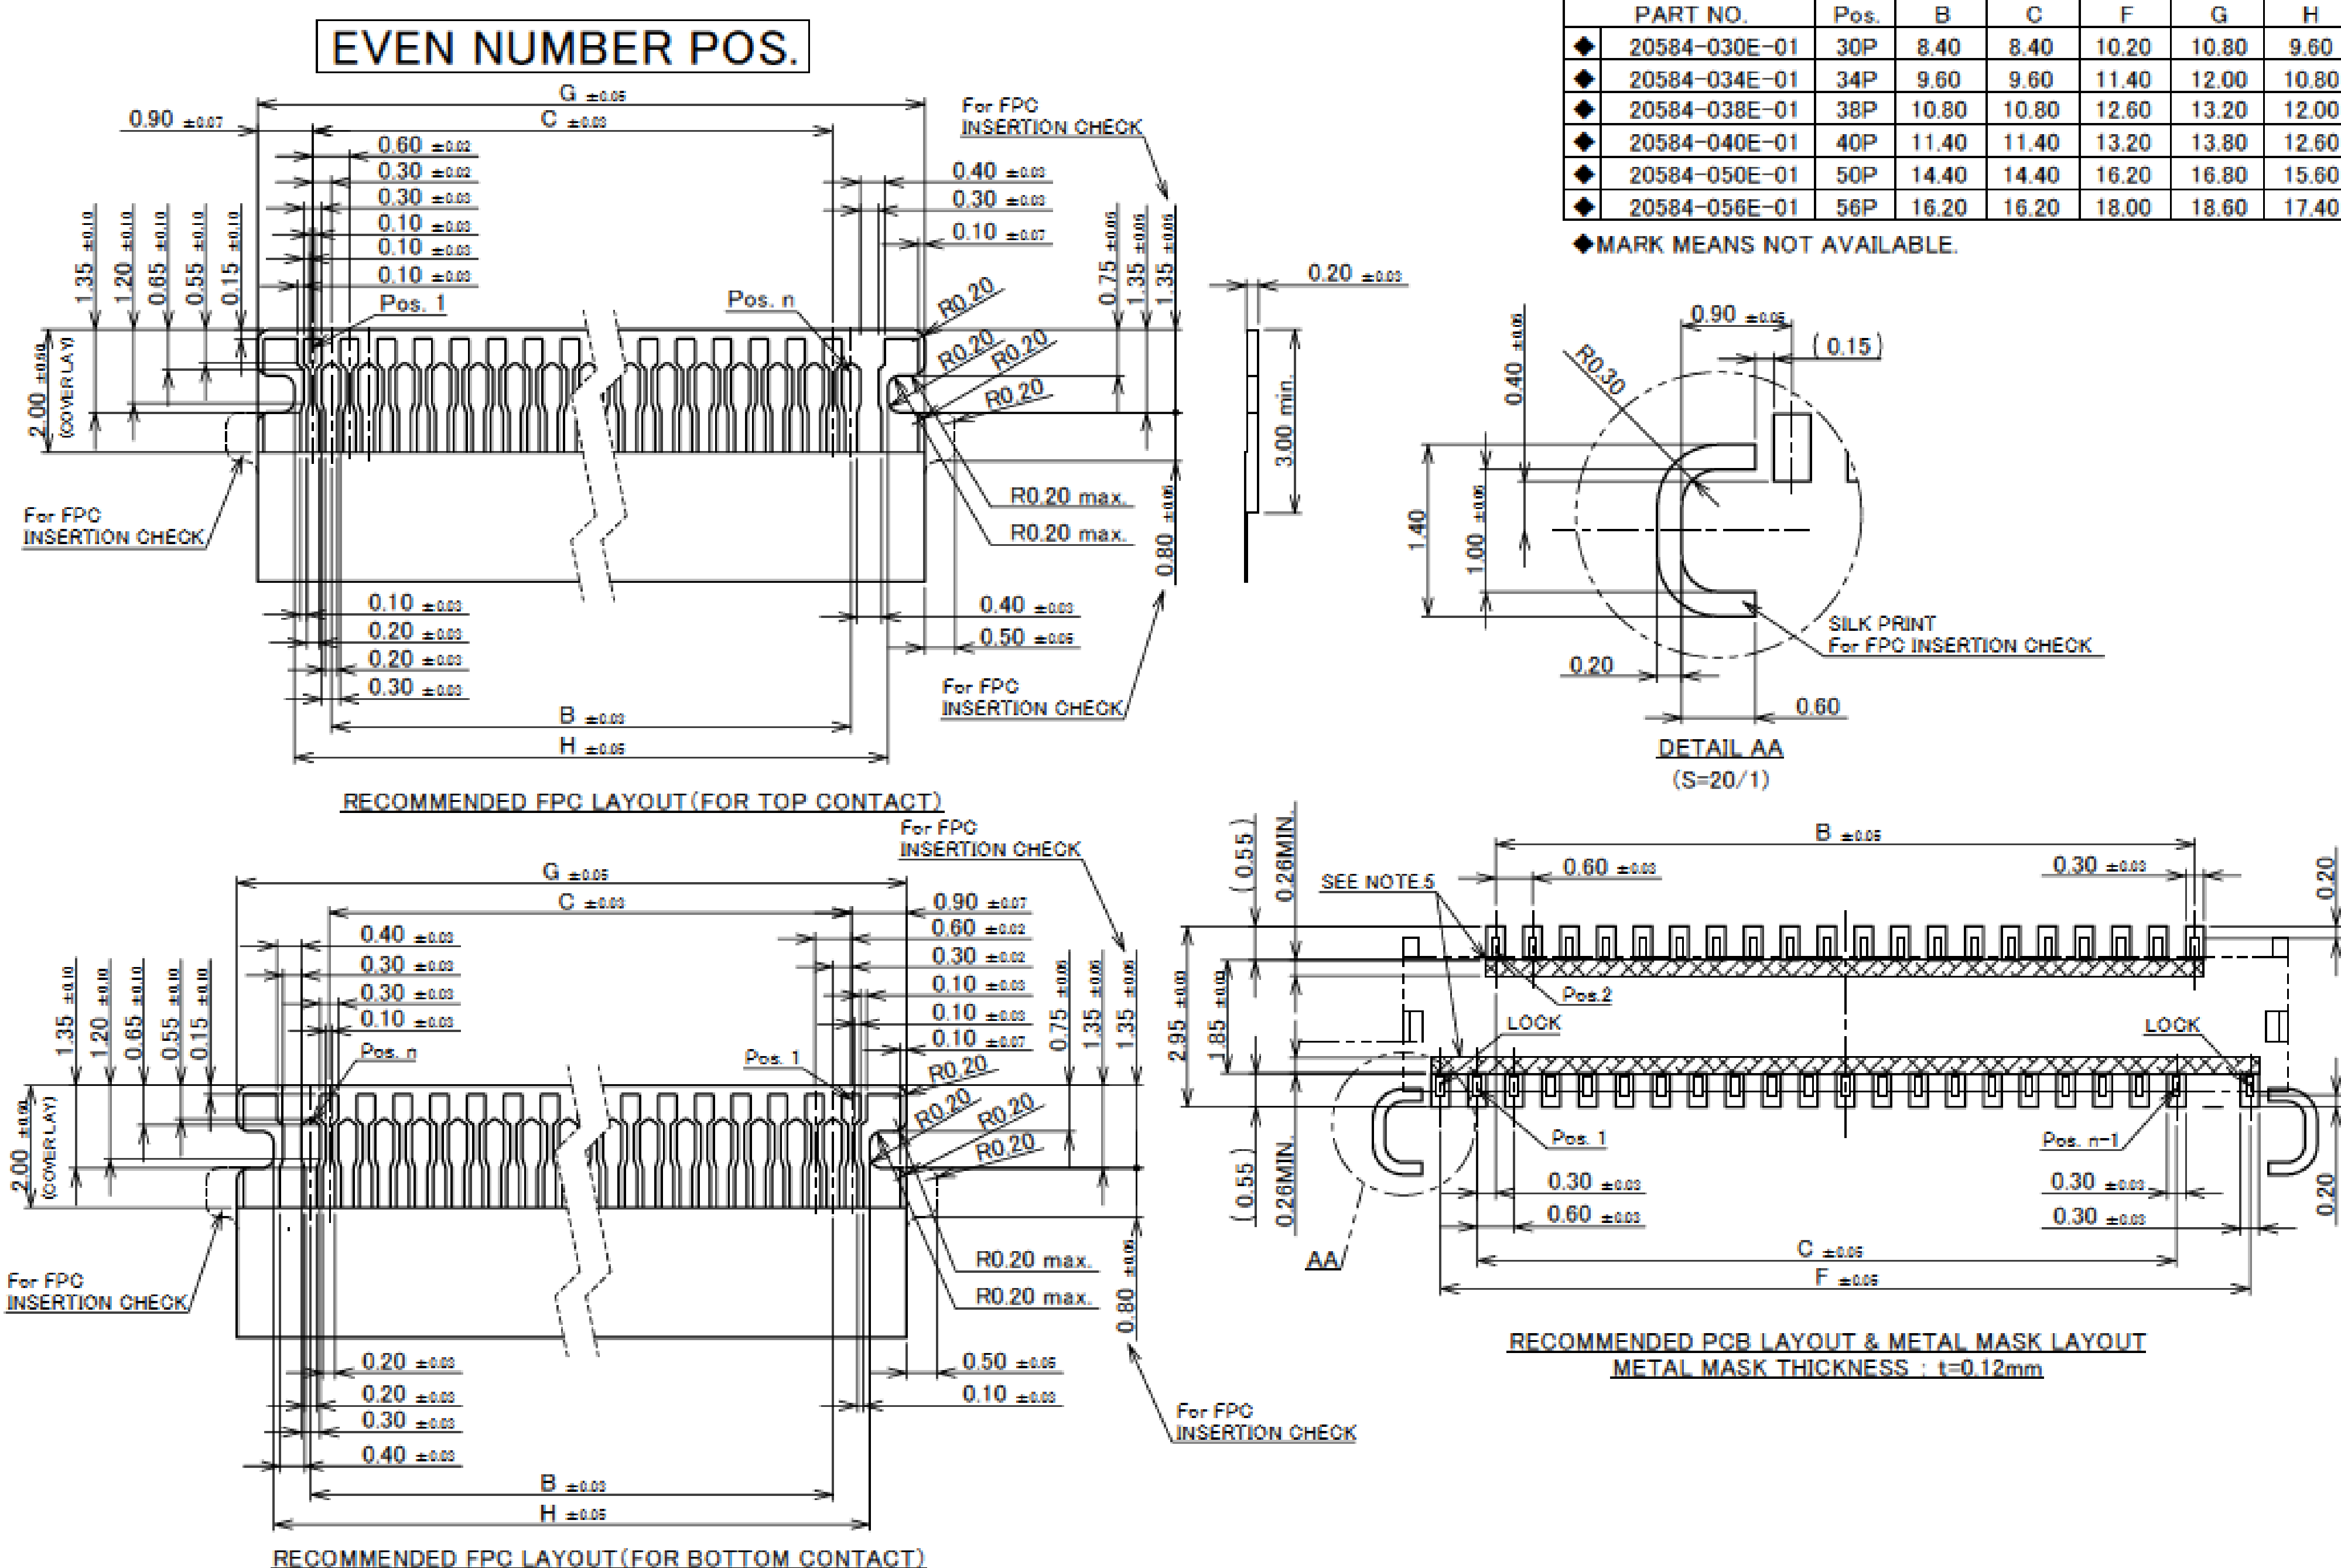

Rev.18

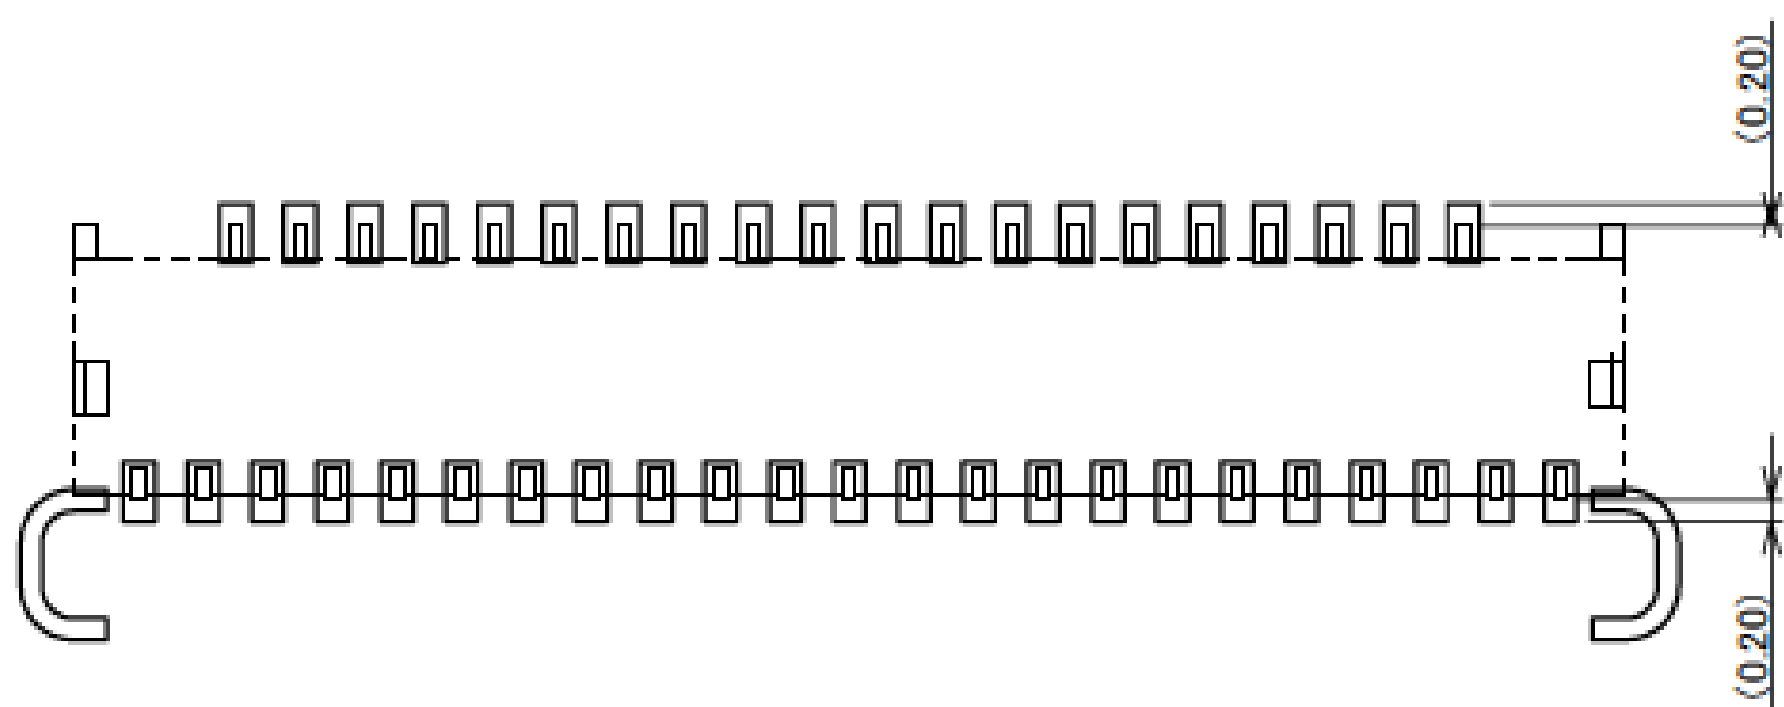

CONNECTOR ON RECOMMENDED PCB LAYOUT

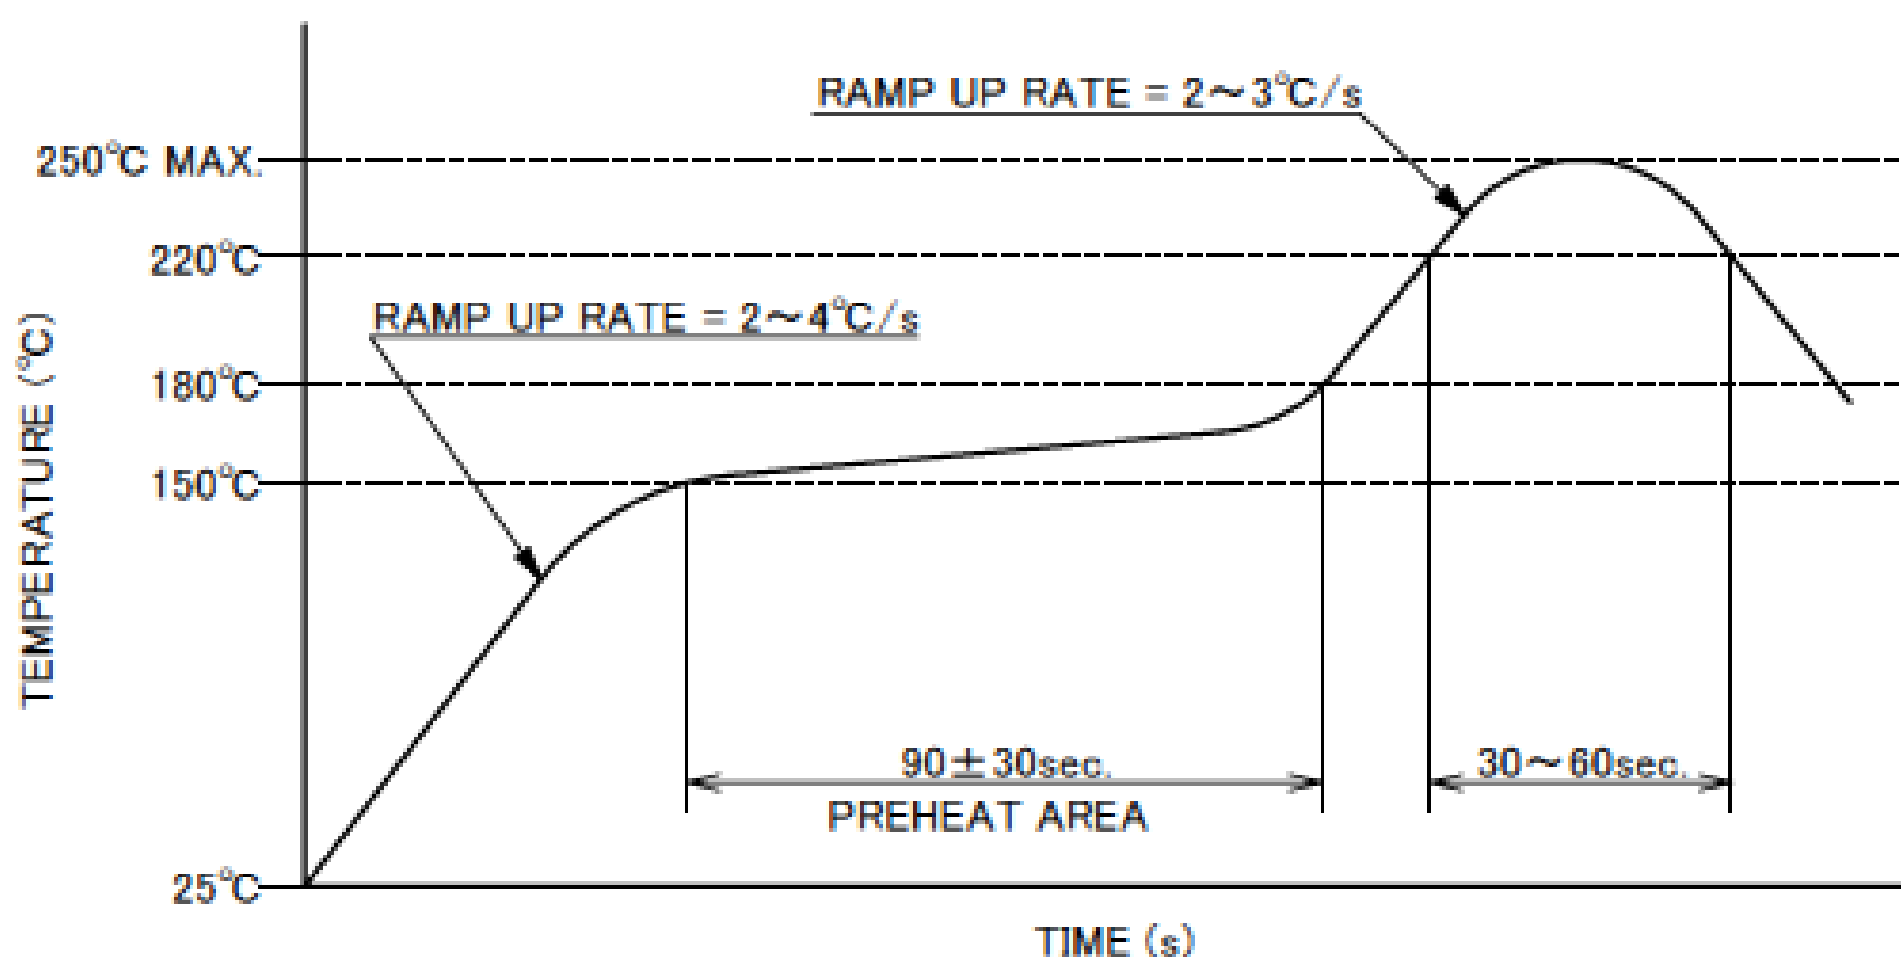

REFLOW TEMPERATURE PROFILE
SENJU METAL INDUSTRY CO., LTD. : M705-SHF(Sn96.5 Ag3.0 Cu0.5)

Connector Assembly


ITEMS	SPECIFICATION
RATING VOLTAGE	50V AC (PER CONTACT)
RATING AMPERAGE	0.3A DC (PER CONTACT)
OPERATING TEMPERATURE	233~358K (-40℃~+85℃)
OPERATING HUMIDITY	20~80%RH
CONTACT RESISTANCE	INITIAL : 60mohm MAX. / AFTER TEST : $\triangle$ 40mohm MAX.
INSULATION RESISTANCE	100Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC250V 1min
DURABILITY	20 CYCLES
ACTUATOR LOCKING FORCE (INITIAL / 20 CYCLES)	INITIAL / 20 CYCLES 0.21N (21gf) × (n + 2) MAX.
ACTUATOR UNLOCKING FORCE (INITIAL / 20 CYCLES)	INITIAL / 20 CYCLES 0.014N (1.4gf) × (n + 2) MIN.
FPC RETENTION FORCE (INITIAL / AFTER TEST)	INITIAL: 0.13N (13gf) × n + 1.0N MIN. / AFTER TEST: 0.10N (10gf) × n + 1.0N MIN.
COPLANARITY	0.10 MAX.
PRODUCT SPECIFICATION	PRS-1789
TEST REPORT	TR-13022
PACKING STANDARD	PST-13013
INSTRUCTION MANUAL	HIM-12007
APPEARANCE CRITERIA No.	QLS-A***

※ “n” IS THE NUMBER OF PIN

Custom Connectors Available

RF Connectors

MHF® series

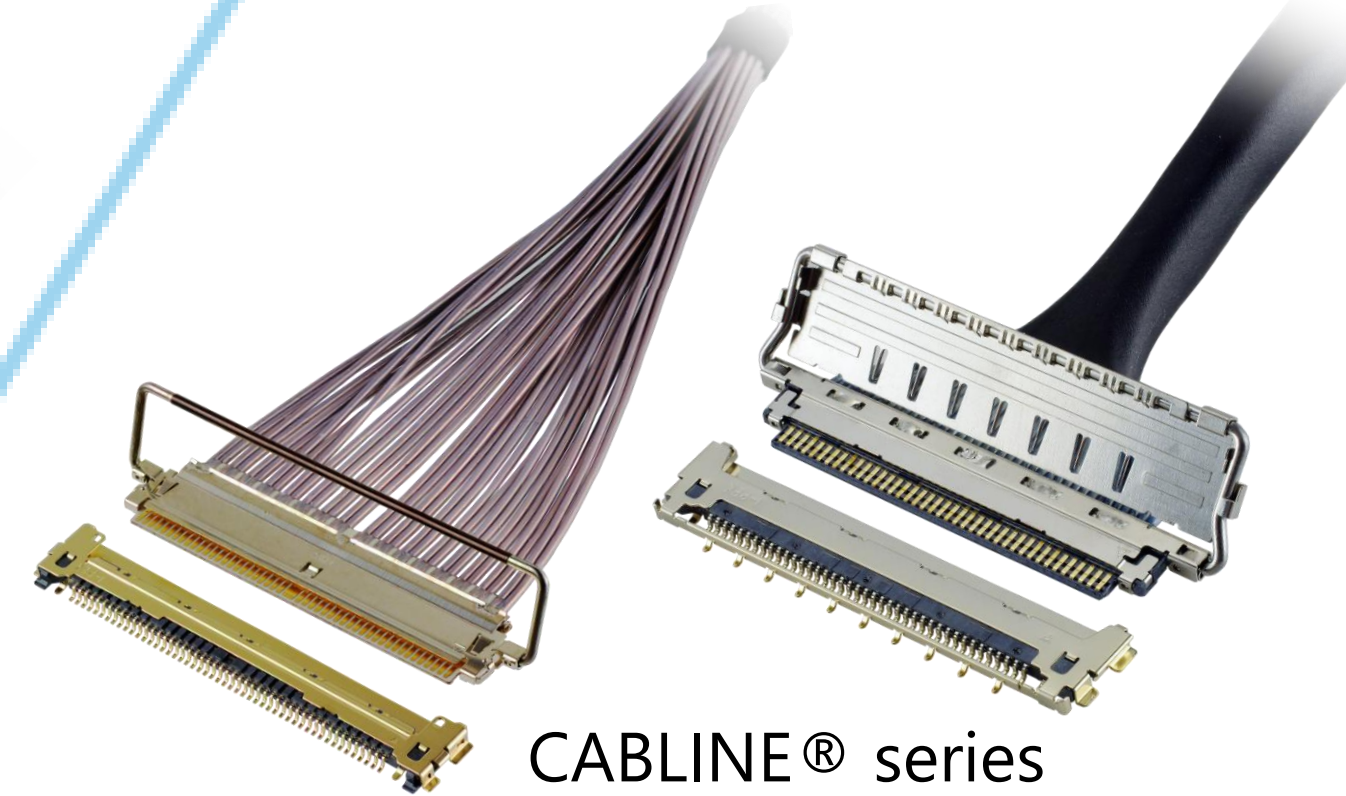

CABLINE® series




Micro-Coaxial/Twinaxial Connectors




Wire-to-Board Connectors/ Terminals

AP series

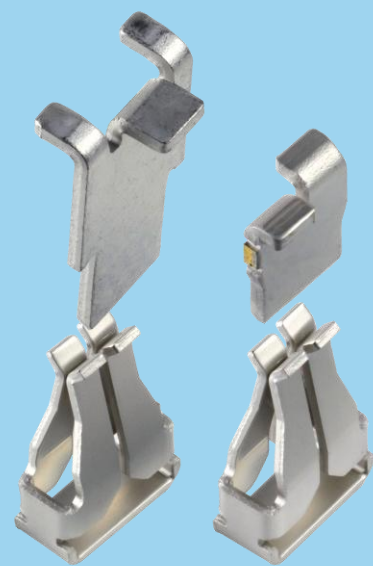

ISH® series

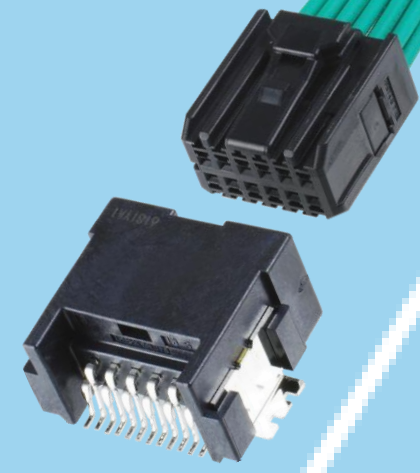


NOVASTACK® series



Board-to-Board Connectors



I/O Connectors

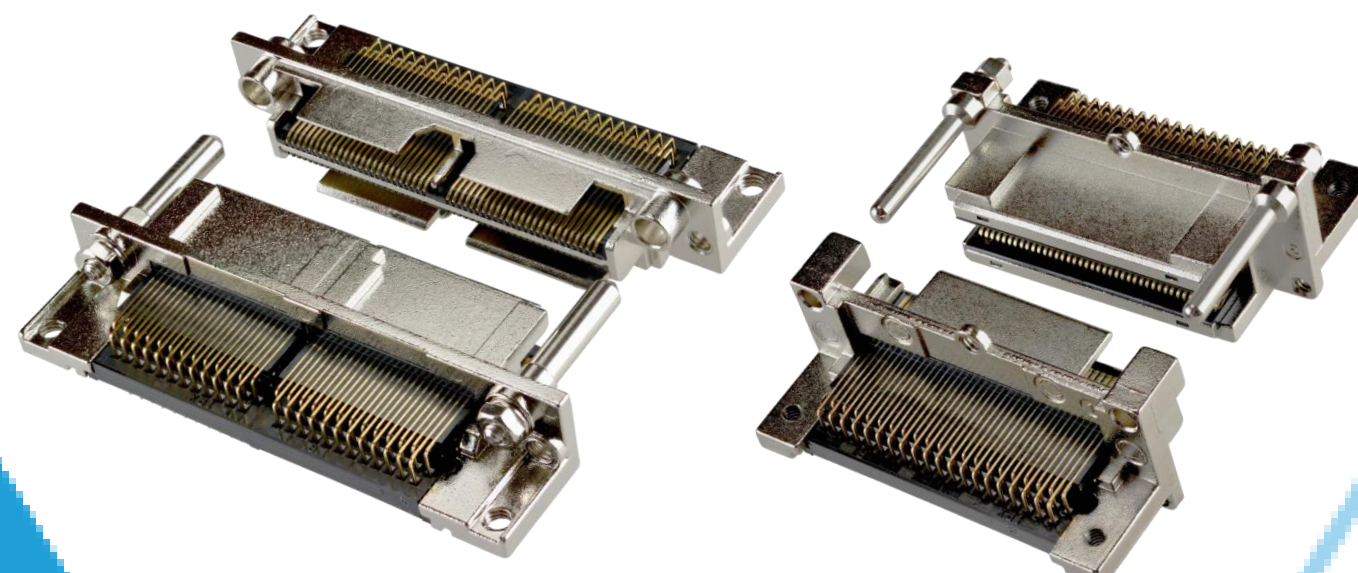

MINIDOCK™ series


MINIFLEX® series EVAFLEX® series



FPC/FFC Connectors



Inquiry

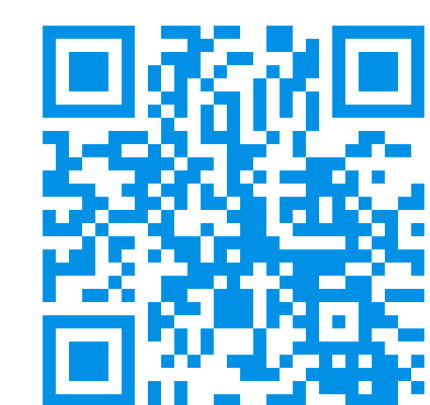

I-PEX, MHF, CABLINE, NOVASTACK, ISH, IARPB, MINIFLEX, EVAFLEX, MINIDOCK, i-Fit and ZenShield are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update Information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation, medical equipment, safety equipment etc.).

Contact your sales representative
or more detailed information.

www.i-pex.com



I-PEX

© I-PEX Inc. 2026
All rights reserved