






- ✓ 実装裏面からのグラウンド・電源接続
- ✓ ワーキングハイト(PCB厚み含む)
0.65mm-0.95mm(MP-S01),0.85mm-1.25mm(MP-S03)
- ✓ 接圧0.3-0.9N

実装裏面からのグラウンド・電源接続

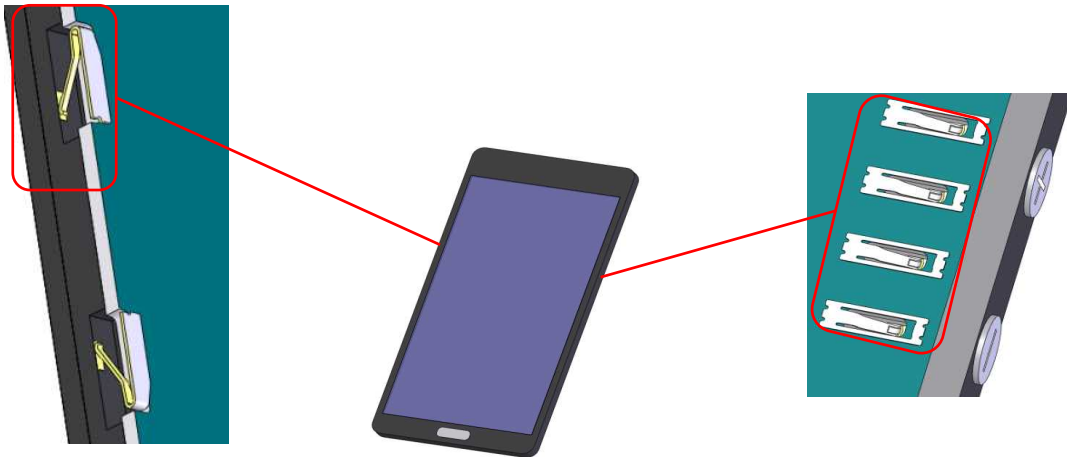

ワーキングハイト(PCB厚み含む) 0.65mm-0.95mm(MP-S01),0.85mm-1.25mm(MP-S03)

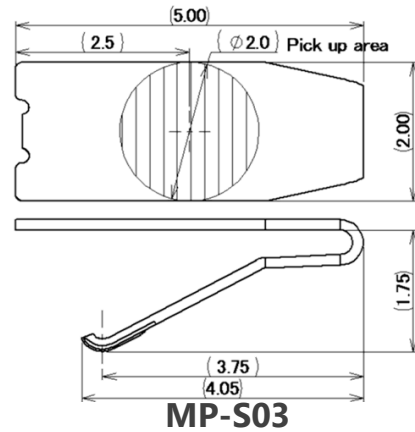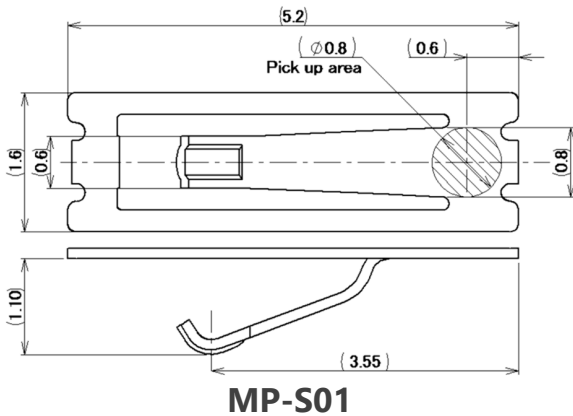

接圧0.3-0.9N






	MP-S01	MP-S03
アイテム		
接圧	0.3N - 0.9N	0.3N - 0.9N

MP-S

Component Parts Detail

MP-S01

Recommended P/N	3110-0001
PART NO.	3110-0001

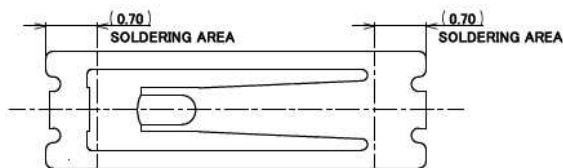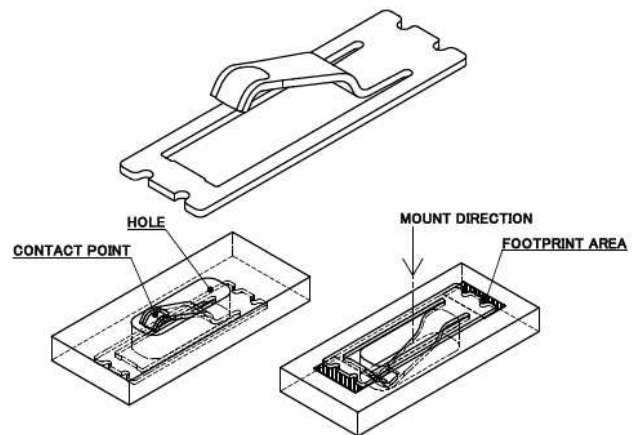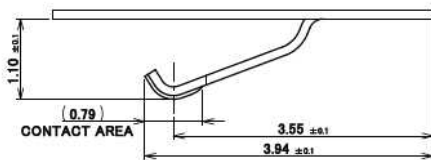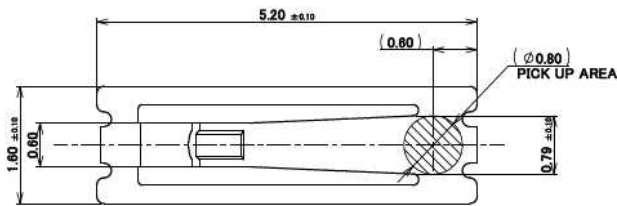

NO.	DISCRIPTION	MATERIAL	FINISH, REMARKS
1	CONNECTOR	PHOSPHOR BRONZE T=0.12mm	UNDER PLATE Ni 1.27 μm MIN. CONTACT AREA Au 0.1 μm MIN.

NOTES.
 1.WORKING HEIGHT=0.75±0.10
 2.BOARD THICKNESS=0.85 MAX.


Rev.4

MP-S01


ITEMS	SPECIFICATION
RATING VOLTAGE	5 V AC (PER A CONTACT)
RATING AMPERAGE (FOR SIGNAL CONTACT)	0.7 A AC (PER A CONTACT)
OPERATING TEMPERATURE	248~358K(-40°C~85°C)
OPERATING HUMIDITY	85% MAX.(NON-CONDENDING)
CONTACT RESISTANCE (FOR SIGNAL CONTACT)	INITIAL : 25 mohm MAX. / AFTER TEST : 25 mohm MAX.
DURABILITY	10 CYCLES
CONTACT FORCE	0.30~0.95 N
COPLANARITY	0.08 MAX.
PRODUCT SPECIFICATION	PRS-2227
TEST REPORT	TR-16040
PACKING STANDARD	PST-18050
INSTRUCTION MANUAL	HIM-19018
APPEARANCE CRITERIA No.	QLS-A***

Rev.4

MP-S01

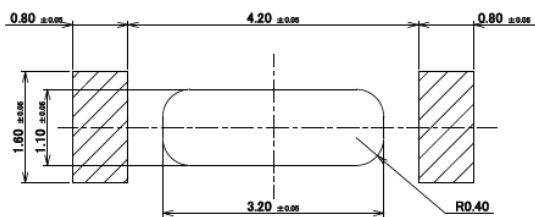


RECOMMENDED FOOTPRINT PATTERN LAYOUT

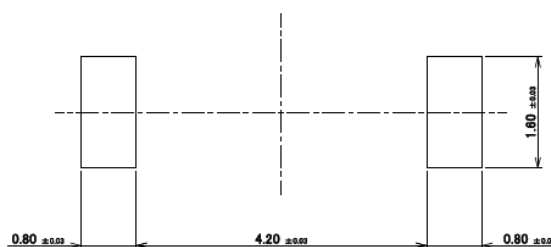


RECOMMENDED METAL MASK LAYOUT
METAL MASK THICKNESS : T=0.10mm

Rev.4

MP-S01

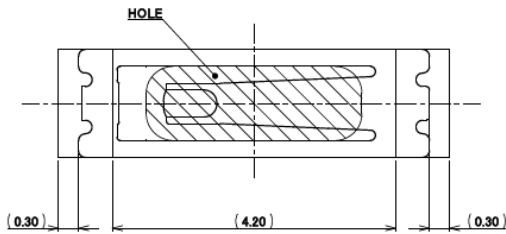

CONNECTOR ON RECOMMENDED FOOTPRINT PATTERN

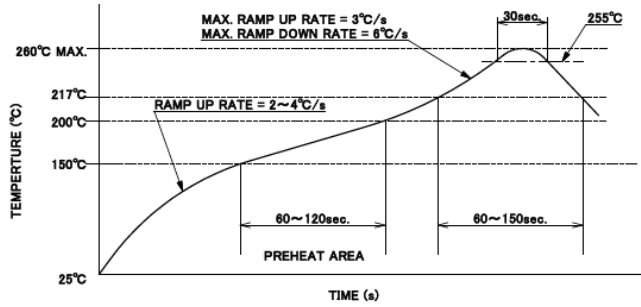


REFLOW TEMPERATURE PROFILE
SENJU METAL INDUSTRY CO., LTD. : M705-SHF(Sn96.5 Ag3.0 Cu0.5)

Rev.4

MP-S03

Recommended P/N	3112-0001
PART NO.	3112-0001

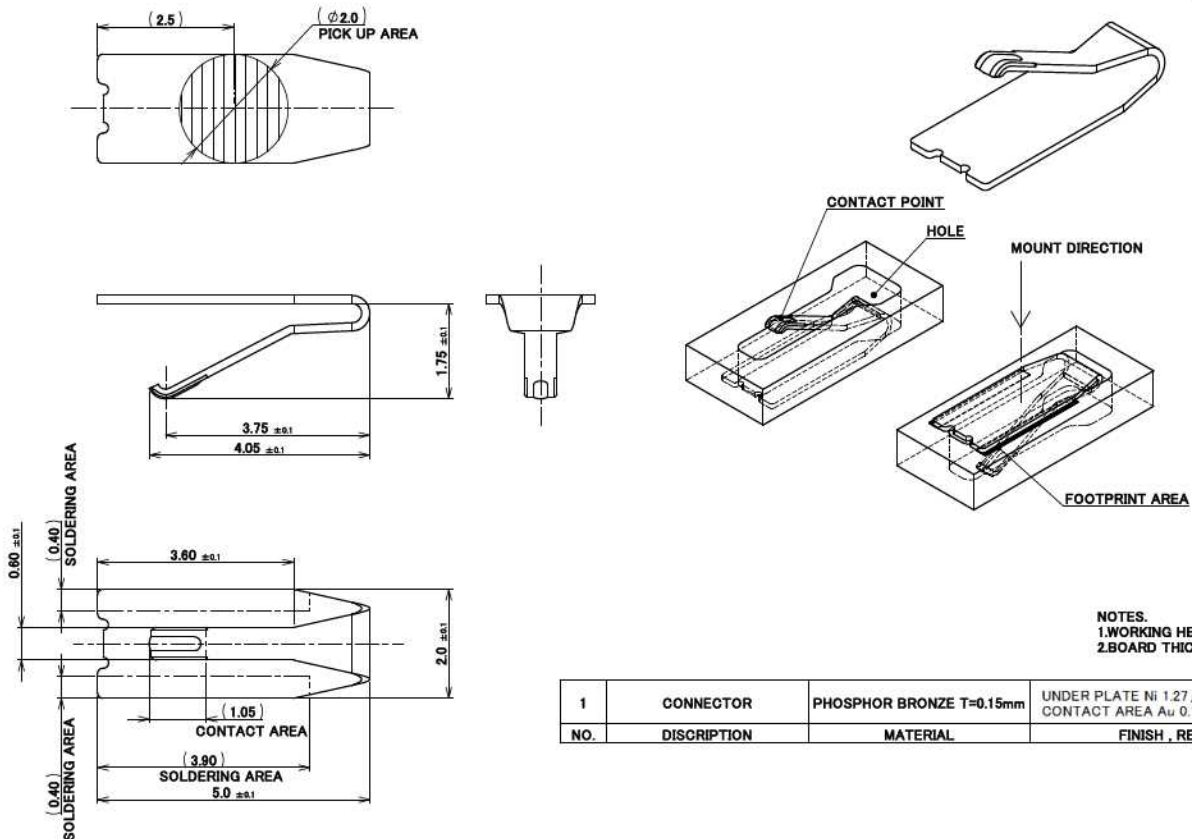

NOTES.
1.WORKING HEIGHT=1.05±0.2
2.BOARD THICKNESS=1.25 MAX.

NO.	DISCRPTION	MATERIAL	FINISH , REMARKS
1	CONNECTOR	PHOSPHOR BRONZE T=0.15mm	UNDER PLATE Ni 1.27 μm MIN. CONTACT AREA Au 0.1 μm MIN.


Rev.4

MP-S03


ITEMS	SPECIFICATION
RATING VOLTAGE	5 V AC (PER A CONTACT)
RATING AMPERAGE (FOR SIGNAL CONTACT)	3 A AC (PER A CONTACT)
OPERATING TEMPERATURE	248~358K(-40°C~85°C)
OPERATING HUMIDITY	85% MAX.(NON-CONDENDING)
CONTACT RESISTANCE (FOR SIGNAL CONTACT)	INITIAL : 70 mohm MAX. / AFTER TEST : 70 mohm MAX.
DURABILITY	10 CYCLES
CONTACT FORCE	0.30~1.10 N
COPLANARITY	0.08 MAX.
PRODUCT SPECIFICATION	PRS-2228
TEST REPORT	TR-16041
PACKING STANDARD	PST-18051
INSTRUCTION MANUAL	HIM-19019
APPEARANCE CRITERIA No.	QLS-A***

Rev.4

MP-S03


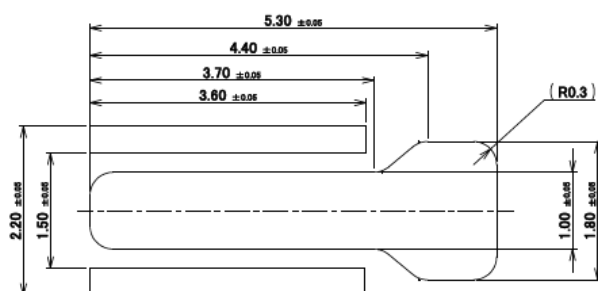


RECOMMENDED FOOTPRINT PATTERN LAYOUT

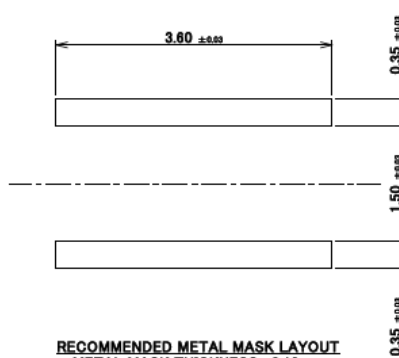

RECOMMENDED METAL MASK LAYOUT
METAL MASK THICKNESS : 0.10mm

Rev.4

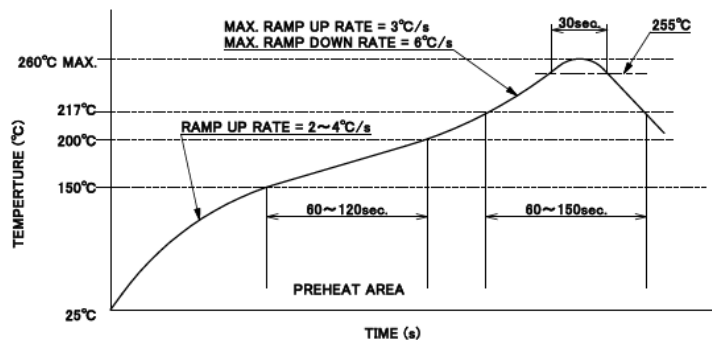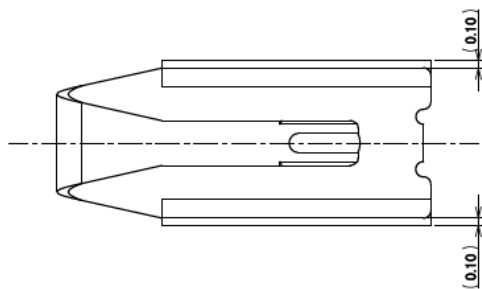

Rev.4



Copyright © I-PEX Inc. 2020. All rights reserved.

I-PEX, MHF, CABLINE, NOVASTACK, EVAFLEX, MINIFLEX, ISH, IARPB, IASLP, ESTORQ, i-Fit, ISFIT はI-PEX株式会社の登録商標です。本書の記載内容については、予告なく変更することがありますのでご了承ください。内容に含まれる情報の正確性や更新義務について当社は一切の責任を負いません。ご使用前に「使用上の注意」および「取扱説明書」の最新版を必ずご覧ください、ご理解のうえご使用ください。使用上の注意事項に反して本製品をご使用したことによって生じた不具合、故障及び事故に関し、当社は一切その責任を負いません。極めて高い信頼性・安全性が要求される用途や人命に関わる用途(原子力・航空宇宙・運輸・医療・安全装置等)への使用に関しましては、事前に当社営業窓口までご相談ください。

詳しい情報については、営業窓口までお問い合わせください。 [i-pex.com]