

# CABLINE®-UM PLUG PULL TAPE HOLDER

Part No. 3588-0\*\*1

## Packing Standard

2	S24027	January 24, 2024	K.Tanabe	M.Nakamura	T.Masunaga
1	S22046	February 3, 2022	R.Morita	T.Masunaga	H.Ikari
0	S18549	September 11, 2018	A.Koyanagi	T.Masunaga	H.Ikari
Rev.	ECN	Date	Prepared by	Checked by	Approved by

## 1. Product Name(s) and Parts Number(s)

Product Name	Part Number
CABLINE-UM PLUG PULL TAPE HOLDER	3588-0**1

## 2. Packing Material

Pos.	Reel		Packing Carton
	Diameter	Width	Outer Dimension
30P			
40P			
50P	φ380	54.0	406×406×214
60P			OUTER

## 3. Packing Quantity

Pos.	REEL QTY.	QTY. [1REEL]	Quantity Per Packing Carton
30P			
40P			
50P	3 REELS	10000	10,000 × 3 = 30,000
60P			

## 4. Label

The diagram shows a rectangular label divided into several sections. On the left, there are three rows: 'P/N', 'QTY', and 'LOT'. Below these is a QR code. To the right of the QR code is a 'NAME:' field containing a 'RoHS Compliant' logo and 'MADE IN \*\*\*\*\*' with an arrow pointing to a field. Further right is a 'CHECK' field with a stamp and a 'REMARK' field. On the far right, there are two recycling symbols with Chinese text '捆包卷盘 WPP' and '层间纸 WPP', and a small 'HF' box at the bottom right. Numbered callouts 1-10 point to various fields: 1 (P/N), 2 (QTY), 3 (LOT), 4 (NAME), 5 (QR code), 6 (CHECK stamp), 7 (country of origin), 8 (top recycling symbol), 9 (bottom recycling symbol), and 10 (bottom left corner).

- ① Part Number
- ② Quantity
- ③ Ten Digits Product Lot Number

Y	Y	M	M	D	D	#	#	#	#
Year		Month		Day		Four Digit Code for I-PEX usage			

- ④ Product Name
- ⑤ QR Code
- ⑥ Check Stamp
- ⑦ Country of Origin
- ⑧ Recycle Mark and Compliance Mark
- ⑨ Logo Mark
- ⑩ Manufacture Name

## 5. Packing style

### 5-1 Packing of REEL

- (1) Coiling of shell to reel follow as shown Fig.1.
- (2) Coiling QTY. is 10000 in reel.

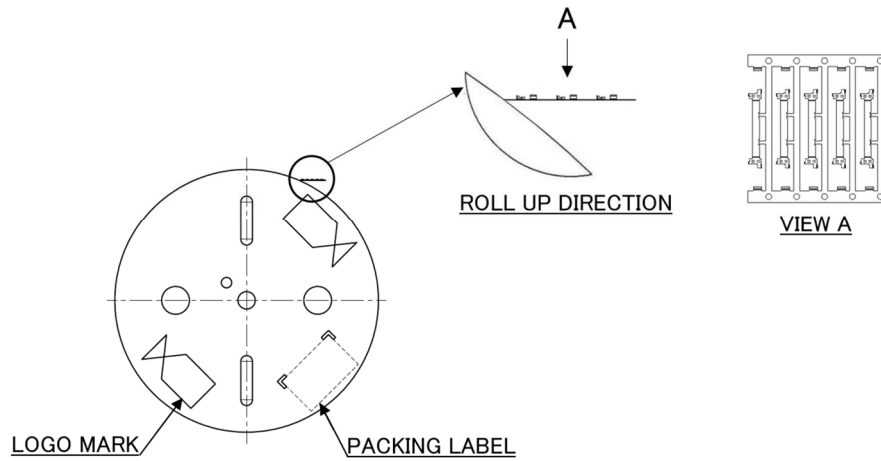


Fig.1

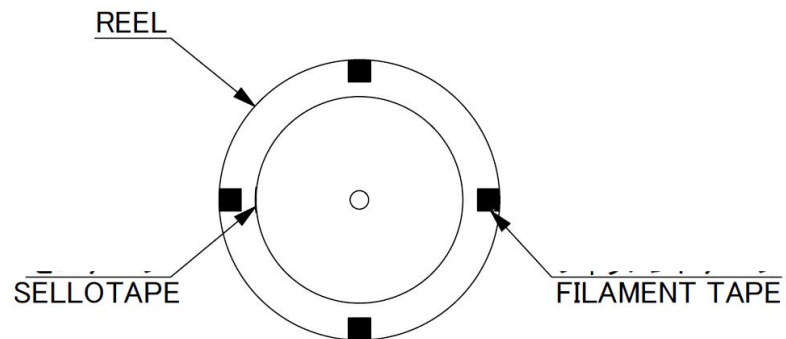


Fig.2

## 5-2. Packing of P CARTON

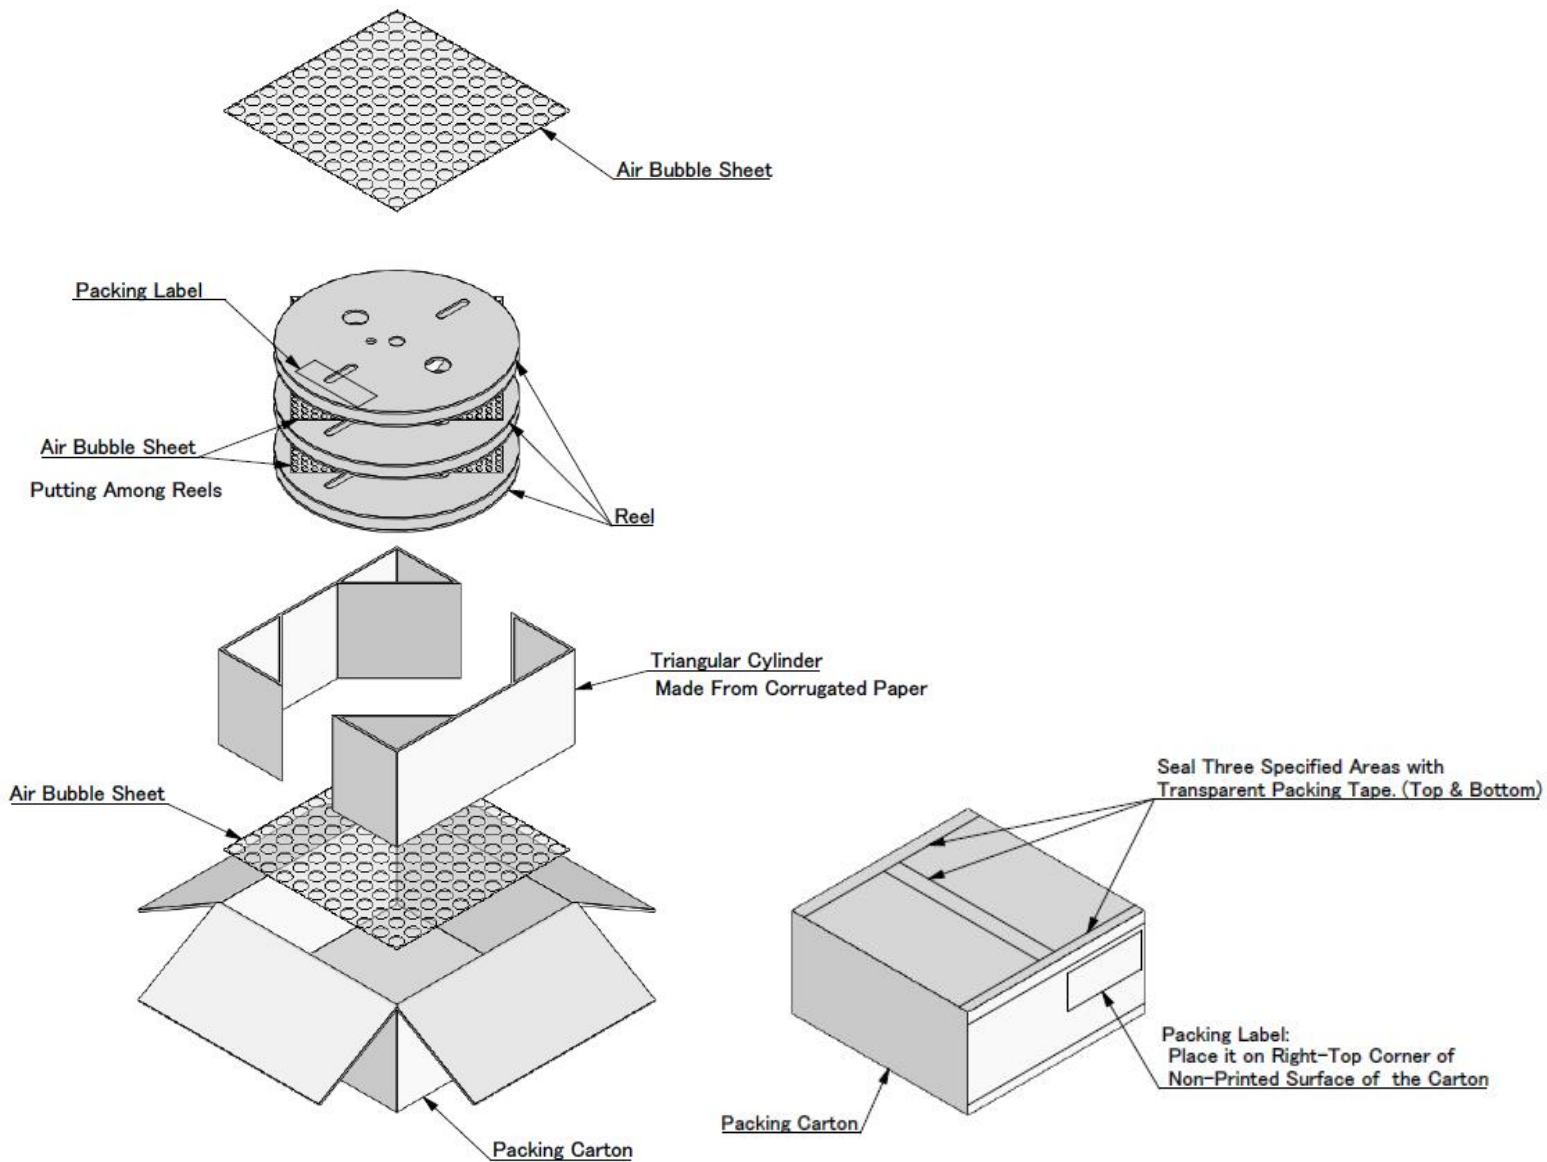


Fig.3

[Note]

Connection of carrier: 1 connection MAX. / reel

To write the label "ONE CONNECTION", when we connect the carrier.

There must be at least two turns of coiling paper between the first and the second carrier.

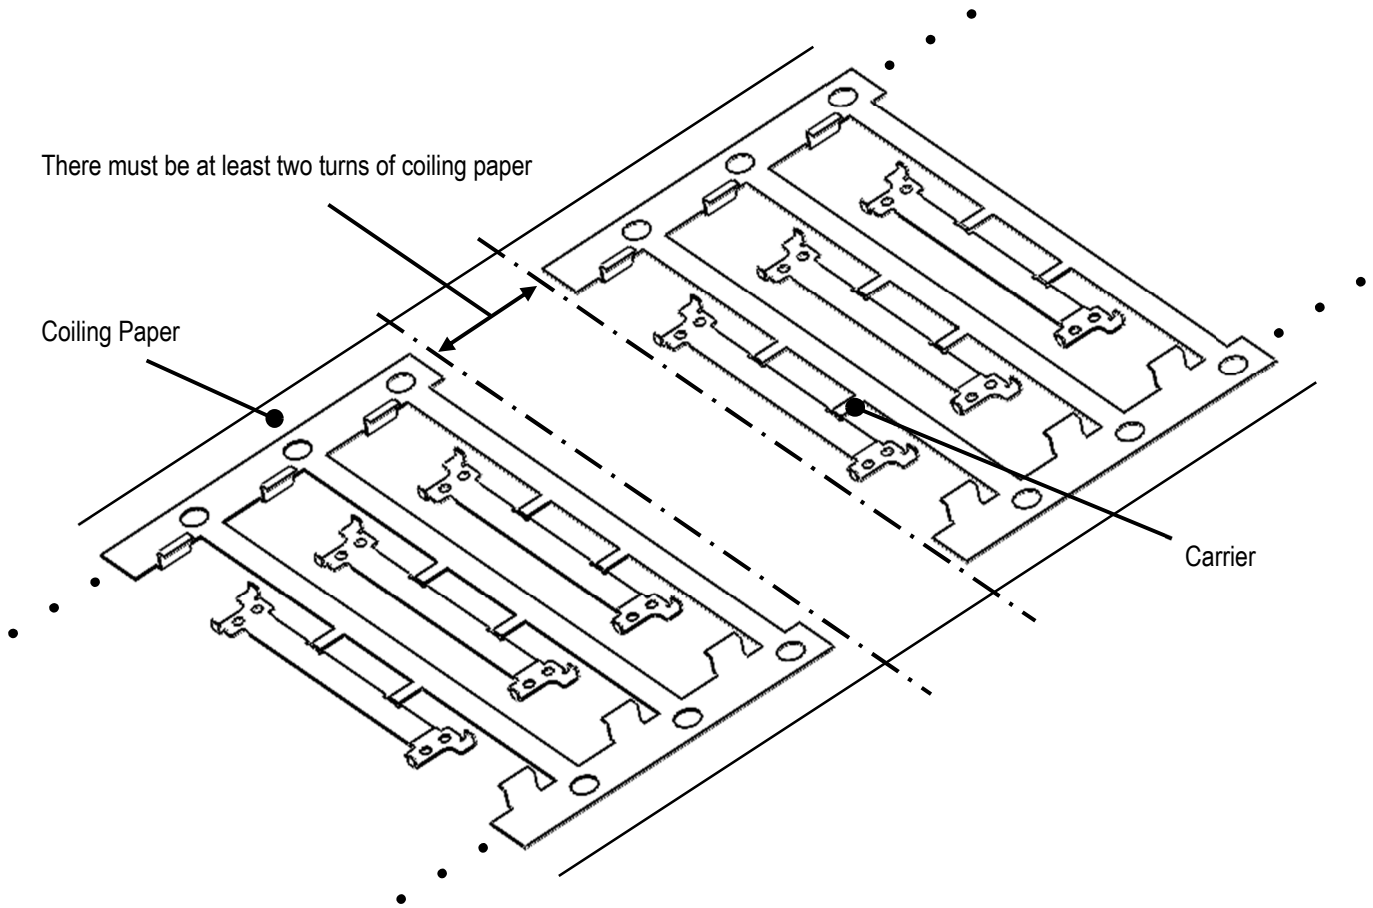


Fig.4 Connection of carrier