

CABLINE®-CA IIF PLUS

Part No. Plug: 20901-060T-01

Receptacle: 20790-060E-0## (CABLINE-CA II PLUS RECEPTACLE)

Product Specification

Qualification Test Report No. TR-24034

0	S24389	September 12, 2024	T.Onishi	M.Muro	T.Masunaga
Rev.	ECN	Date	Prepared by	Checked by	Approved by

1. Scope

This product specification defines the test conditions and the performances of the CABLINE-CA IIF PLUS Connector, a shield FPC-to-board connector of 0.4mm contact pitch.

2. Product Name and Parts No.

2.1 Product Name

CABLINE-CA IIF PLUS

2.2 Parts No.

Plug: 20901-060T-01

2.3 Applicable Receptacle Connector

CABLINE-CA II PLUS RECEPTACLE: 20790-060E-0##

2.4 Applicable FPC

Shielded FPC Conductor pitch / size of thickness . . . 0.4mm /0.25+0.02/-0.03mm
Thermosetting adhesive. Refer to the product drawing (DWG No.20901) for a detail dimension and structure.

3. Rating

3.1 Operating Conditions

Amperage: 0.3A AC/DC (per contact)
Voltage: 100V AC (per contact)
Operating temperature: 233~358K(-40°C~+85°C) (Containing temperature rise by current)
Operating humidity: 85% max

3.2 Storage Conditions

Storage temperature: 248~333K(-25°C~+60°C)
Storage humidity: 85% max. (Non-condensing)

4. Test and Performance

Test Condition

Unless otherwise specified, all tests and measurements shall be performed under the following conditions in accordance with MIL-STD-202.


Temperature: 288K~308K (15°C~35°C)
Pressure: 866hPa~1066hPa (650mmHg~800mmHg)
Relative humidity: 45~75%R.H.

4.1 Electrical Performance

1. Contact resistance

Reference standard: MIL-STD-202-307

Test conditions: Solder the receptacle connector to the test board and mate the plug connector together, then apply 20mV MAX. DC open circuit voltage and 10mA MAX. DC closed circuit current. Measure the contact resistance of signal and GROUND(SHELL) at the section shown in Fig.1 by the four terminal methods.

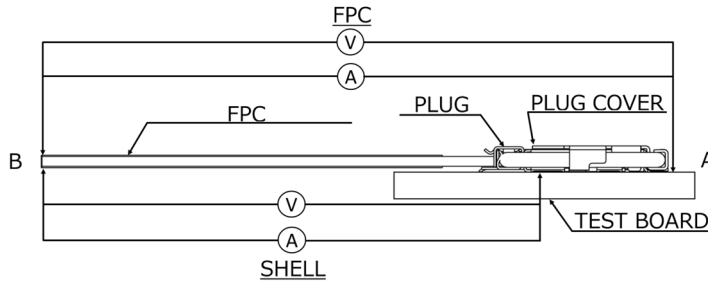

$$\text{Contact Resistance} = R_{AB} - (\text{FPC Conductor Resistance}) - (\text{Test Board Conductor Resistance})$$

Fig.1

Pass criteria: Signal Contact: Initial: 60 mΩ MAX. After testing: ΔR 40 mΩ MAX.
Ground Shell: Initial: 60 mΩ MAX. After testing: ΔR 40 mΩ MAX.

2. Insulation resistance

Reference standard: MIL-STD-202-302

Test conditions: Solder the receptacle connector to the test board and mate the plug connector together, then apply DC 250 V between the neighboring contacts and between contacts and shell.

Pass criteria: Initial: 1000 MΩ MIN. After testing: 500 MΩ MIN.

3. Dielectric withstanding voltage

Reference standard: MIL-STD-202-301

Test conditions: Solder the receptacle connector to the test board and mate the plug connector together, then apply AC 250V(rms) between the neighboring contacts and between contacts and shell for a minute.

Pass criteria: No creeping discharge, flashover, no insulator breakdown shall occur.

4. Temperature rising

Reference standard: -

Test conditions: Solder the receptacle connector to the test board and mate the plug connector together, and apply rating current per contact. Measure delta T over ambient.

Pass criteria: Over ambient ΔT 30 °C MAX.

4.2 Mechanical Performance

1. Mating force and Un-mating force

Reference standard:	-	
Test conditions:	Solder the receptacle connector to the test board, then place the board and plug on push-on/pull-off machine. Repeat mating/unmating 30 cycles at a speed 25 ± 3 mm/min. along the mating axis. Measure the mating and unmating force at the initial and after 30cycles.	
Pass criteria:	Mating force: (Initial/After 30cycles) 60P: 27.00 N MAX.	Unmating force: (Initial/After 30cycles) 60P: 2.88 N MIN.

2. Durability

Reference standard:	-	
Test conditions:	Solder the receptacle connector to the test board, then place the board and plug on the push-on/pull-off machine, and repeat mating and unmating 30cycles at a speed 25 ± 3 mm/min. along the mating axis.	
Pass criteria:	Contact resistance: Shall meet 4.1.1	

3. Connector Lock

Reference standard:	-	
Test conditions:	Solder the receptacle connector to the test board and mate the plug connector together, and place them on the push-on/pull-off machine, then pull the FPC until 10N along the mating axis at a speed 25 ± 3 mm/min.	
Pass criteria:	It shall not occur the damage and unlock.	

4. Vibration

Reference standard:	MIL-STD-202-201	
Test conditions:	Solder the receptacle connector to the test board, then mate plug connector, and place them on the vibrator. Then apply the following vibration. During the testing, run 100mA DC to check electrical discontinuity. Frequency: 10Hz→55Hz→10Hz/approx. 1min. Directions: 3 mutually perpendicular direction. Total Amplitude: 1.52mm Sweep duration: 2 hours for each direction, a total of 6 hours.	
Pass criteria:	Contact resistance: Shall meet 4.1.1. Electrical discontinuity: No electrical discontinuity greater than $1\mu s$ shall occur. Appearance: No abnormality adversely affecting the performance shall occur.	

5. Shock

Reference standard:	MIL-STD-202-213, Condition A.	
Test conditions:	Solder the receptacle connector to the test board, then mate plug connector, and place them on the shock machine. Then apply the following shock.	
	MAX.G: 50G Duration: 11msec Wave Form: Half Sinusoidal	Directions: 6 mutually perpendicular direction Cycle: 3 cycles about each direction
Pass criteria:	Contact resistance: Shall meet 4.1.1. Electrical discontinuity: No electrical discontinuity greater than $1\mu s$ shall occur. Appearance: No abnormality adversely affecting the performance shall occur.	

4.3 Environmental Performance

1. Thermal shock	
Reference standard:	MIL-STD-202-107, Condition A.
Test conditions:	Solder the receptacle connector to the test board, then mate plug connector, and expose them to the following environment. Temperature: 218K(-55°C),30min.→358K(85°C),30min. Transition time: 5min. MAX. Cycle: 5 cycles
Pass criteria:	Contact resistance: Shall meet 4.1.1. Appearance: No abnormality adversely affecting the performance shall occur.


2. High temperature life	
Reference standard:	MIL-STD-202-108, Condition B.
Test conditions:	Solder the receptacle connector to the test board, then mate plug connector, and expose them to the following environment. Temperature: 358±2K (85±2°C) Duration: 250 hours
Pass criteria:	Contact resistance: Shall meet 4.1.1. Appearance: No abnormality adversely affecting the performance shall occur.

3. Humidity (Steady state)	
Reference standard:	MIL-STD-202-103, Condition A.
Test conditions:	Solder the receptacle connector to the test board, then mate plug connector, and expose them to the following environment. Temperature: 313±2K (40±2°C) Humidity: 90~95%RH Duration: 240 hours
Pass criteria:	Contact resistance: Shall meet 4.1.1. Insulation resistance: Shall meet 4.1.2. Dielectric withstanding voltage: Shall meet 4.1.3. Appearance: No abnormality adversely affecting the performance shall occur.

4. Humidity (Cycling)

Reference standard: MIL-STD-202-106.

Test conditions: Solder the receptacle connector to the test board, then mate plug connector, and expose them to the following environment.
 Temperature: 298[263]~338K (25[-10]~65°C)
 Humidity: 90~98%RH
 Duration: 10cycles (240hours)

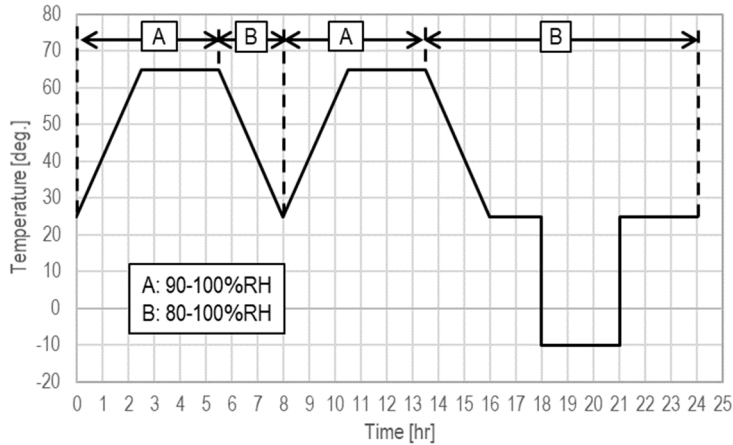

Pass criteria: Contact resistance: Shall meet 4.1.1.
 Insulation resistance: Shall meet 4.1.2.
 Dielectric withstanding voltage: Shall meet 4.1.3.
 Appearance: No abnormality adversely affecting the performance shall occur.

5. Salt water spray

Reference standard: MIL-STD-202-101, Condition B.

Test conditions: Solder the receptacle connector to the test board, then mate plug connector, and expose them to the following environment.
 Temperature: 308±2K (35±2°C)
 Salt water density: 5±1% [by weight]
 Duration: 48 hours

Pass criteria: Contact resistance: Shall meet 4.1.1.
 Appearance: No abnormality adversely affecting the performance shall occur.

6. H₂S gas

Reference standard: -

Test conditions: Solder the receptacle connector to the test board, then mate plug connector, and expose them to the following environment.
 Temperature: 313±2K (40±2°C)
 Relative humidity: 80±5%RH
 Gas: H₂S 3±1ppm
 Duration: 48 hours

Pass criteria: Contact resistance: Shall meet 4.1.1.
 Appearance: No abnormality adversely affecting the performance shall occur.

4.4 Test Sequence and Specimen Quantity

Details of the Testing Groups A to K are indicated in test report.

Table.1 Test Sequence and Sample Quantity

No.	Test Item	Testing Groups										
		A	B	C	D	E	F	G	H	J	K	
4.1 Electrical Performance	1	Contact resistance		2,6		1,3,5	1,3	1,3	1,5	1,5	1,3	1,3
	2	Insulation resistance							2,6	2,6		
	3	Dielectric withstanding voltage							3,7	3,7		
	4	Temperature rising	1									
4.2 Mechanical Performance	1	Mating force		1,5								
		Unmating force		3,7								
	2	Durability		4								
	3	Connector lock			1							
	4	Vibration				2						
	5	Shock				4						
4.3 Environmental Performance	1	Thermal shock					2					
	2	High temperature life						2				
	3	Humidity (Steady State)							4			
	4	Humidity (Cycling)								4		
	5	Saltwater spray									2	
	6	H ₂ S gas										2
Specimen quantity			5 pcs	5 pcs	5 pcs	5 pcs	5 pcs	5 pcs	5 pcs	5 pcs	5 pcs	5 pcs

※Numbers indicate test sequences.

5. Precautions for Handling Cable Connectors

Refer to instruction manual : HIM-24010 for the handling of CABLINE-CA IIF PLUS.