

# CABLINE®-CA IIF

Part No. Plug: 20856-0\*\*T-01

Receptacle: 20682-0\*\*E-0# (CABLINE-CA II RECEPTACLE)

## Product Specification

Qualification Test Report No. TR-17079

5	S22301	July 4, 2022	T.Onishi	M.Muro	H.Ikari
4	S21659	December 2, 2021	M.Muro	-	H.Ikari
3	S20660	December 17, 2020	M.Muro	-	Y.Shimada
2	S18682	November 19, 2018	Y.Sasa	T.Masunaga	H.Ikari
Rev.	ECN	Date	Prepared by	Checked by	Approved by

## 1. Scope

This Product Specification defines the test conditions and the performances of the CABLINE-CA IIF Connector , a shield FPC-to-board connector of 0.4mm contact pitch.

## 2. Product Name and Parts No.

### 2.1 Product Name

CABLINE-CA IIF

### 2.2 Parts No

Plug: 20856-0\*\*T-01

### 2.3 Applicable RECE Connector

CABLINE-CA II RECEPTACLE: 20682-0\*\*E-0#

### 2.4 Applicable FPC

Shielded FPC Conductor pitch / size of thickness . . . 0.4mm /0.25+0.02/-0.03mm  
Thermosetting adhesive. Refer to the product drawing (DWG No.20856) for a detail dimension and structure.

## 3. Rating

### 3.1 Operating Conditions

Amperage: 0.3A AC/DC (per contact)

Voltage: 100V AC (per contact)

Operating temperature: 233~358K(-40°C~+85°C) (Containing temperature rise by current)

Operating humidity: 85% max

### 3.2 Storage Conditions

Storage temperature: 248~333K(-25°C~+60°C)

Storage humidity: 85% max. (Non-condensing)

## 4. Test and Performance

### Test Condition

Unless otherwise specified, all tests and measurements shall be performed under the following conditions in accordance with MIL-STD-202G.

Temperature: 288K~308K (15°C~35°C)

Pressure: 866hPa~1066hPa (650mmHg~800mmHg)


Relative humidity: 45~75%R.H.

## 4.1 Electrical Performance

### 1. Contact resistance

Reference standard: MIL-STD-202G, Method 307

Test conditions: Solder the receptacle connector to the test board and mate the plug connector together, then apply 20mV MAX. DC open circuit voltage and 10mA MAX. DC closed circuit current. Measure the contact resistance of signal and GROUND(SHELL) at the section shown in Fig.1 by the four terminal methods.

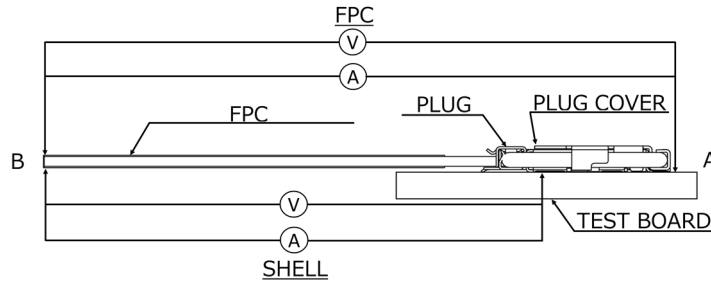

$$\text{Contact Resistance} = R_{AB} - (\text{FPC Conductor Resistance}) - (\text{Test Board Conductor Resistance})$$

Fig.1

Pass criteria: Signal Contact: Initial: 60 mΩ MAX. After testing:  $\Delta R$  40 mΩ MAX.  
Ground contact: Initial: 60 mΩ MAX. After testing:  $\Delta R$  40 mΩ MAX.

### 2. Insulation resistance

Reference standard: MIL-STD-202G, Method 302

Test conditions: Mate the plug and receptacle connector together, then apply DC 250 V between the neighboring contacts and between contacts and SHELL.

Pass criteria: Initial: 1000 MΩ MIN. After testing: 500 MΩ MIN.

### 3. Dielectric withstanding voltage

Reference standard: MIL-STD-202G, Method 301

Test conditions: Mate the plug and receptacle connector together, then apply AC 250V(rms) between the neighboring contacts and between contacts and SHELL for a minute.

Pass criteria: No creeping discharge, flashover, no insulator breakdown shall occur.

### 4. Temperature rising

Reference standard: -

Test conditions: Mate the plug and receptacle connector together, and apply rating current per contact. Measure delta T over ambient.

Pass criteria: Over ambient  $\Delta T$  30 °C MAX.

## 4.2 Mechanical Performance

### 1. Mating force and Un-mating force

Reference standard: -

Test conditions: Solder the receptacle connector to the test board, then place the board and plug on push-on/pull-off machine. Repeat mating/unmating 30 cycles at a speed  $25\pm 3$ mm/min. along the mating axis. Measure the mating and unmating force at the initial and after 30cycles.

Pass criteria:	Mating force: (Initial/After 30cycles)	Unmating force: (Initial/After 30cycles)
	30P: 13.5 N MAX.	30P: 1.44 N MIN.
	40P: 18.0 N MAX.	40P: 1.92 N MIN.
	50P: 22.5 N MAX.	50P: 2.40 N MIN.

### 2. Durability

Reference standard: -

Test conditions: Solder the receptacle connector to the test board, then place the board and plug on the push-on/pull-off machine, and repeat mating and unmating 30cycles at a speed  $25\pm 3$ mm/min. along the mating axis.

Pass criteria: Contact resistance: Shall meet 4.1.1

### 3. Connector Lock

Reference standard: -

Test conditions: Mate the plug and receptacle connector together, and place them on the push-on/pull-off machine, then pull the FPC until 10N along the mating axis at a speed  $25\pm 3$ mm/min.

Pass criteria: It shall not occur the damage and unlock.

### 4. Vibration

Reference standard: MIL-STD-202G, Method 201

Test conditions: Solder the receptacle connector to the test board, then mate plug connector, and place them on the vibrator. Then apply the following vibration. During the testing, run 100mA DC to check electrical discontinuity.  
 Frequency: 10Hz→55Hz→10Hz/approx. 1min.  
 Directions: 3 mutually perpendicular direction.  
 Total Amplitude: 1.52mm  
 Sweep duration: 2 hours for each direction, a total of 6 hours.

Pass criteria: Contact resistance: Shall meet 4.1.1.  
 Electrical discontinuity: No electrical discontinuity greater than  $1\mu$ s shall occur.  
 Appearance: No abnormality adversely affecting the performance shall occur.

### 5. Shock

Reference standard: MIL-STD-202G, Method 213, Condition A.

Test conditions: Solder the receptacle connector to the test board, then mate plug connector, and place them on the shock machine. Then apply the following shock.

MAX.G: 50G	Directions: 6 mutually perpendicular direction
Duration: 11msec	Cycle: 3 cycles about each direction
Wave Form: Half Sinusoidal	

Pass criteria: Contact resistance: Shall meet 4.1.1.  
 Electrical discontinuity: No electrical discontinuity greater than  $1\mu$ s shall occur.  
 Appearance: No abnormality adversely affecting the performance shall occur.

## 4.3 Environmental Performance

### 1. Thermal shock

Reference standard:	MIL-STD-202G, Method 107, Condition A.
Test conditions:	Solder the receptacle connector to the test board, then mate plug connector, and expose them to the following environment. Temperature: 218K(-55°C),30min.→358K(85°C),30min. Transition time: 5min. MAX. Cycle: 5 cycles
Pass criteria:	Contact resistance: Shall meet 4.1.1. Appearance: No abnormality adversely affecting the performance shall occur.

### 2. High temperature life

Reference standard:	MIL-STD-202G, Method 108, Condition B.
Test conditions:	Solder the receptacle connector to the test board, then mate plug connector, and expose them to the following environment. Temperature: 358±2K (85±2°C) Duration: 250 hours
Pass criteria:	Contact resistance: Shall meet 4.1.1. Appearance: No abnormality adversely affecting the performance shall occur.

### 3. Humidity (Steady state)

Reference standard:	MIL-STD-202G, Method 103, Condition A.
Test conditions:	Solder the receptacle connector to the test board, then mate plug connector, and expose them to the following environment. Temperature: 313±2K (40±2°C) Humidity: 90~95%RH Duration: 240 hours
Pass criteria:	Contact resistance: Shall meet 4.1.1. Insulation resistance: Shall meet 4.1.2. Dielectric withstanding voltage: Shall meet 4.1.3. Appearance: No abnormality adversely affecting the performance shall occur.

## 4. Humidity (Cycling)


Reference standard: MIL-STD-202G, Method 106.

Test conditions: Solder the receptacle connector to the test board, then mate plug connector, and expose them to the following environment.

Temperature: 298[263]~338K (25[-10]~65°C)

Humidity: 90~98%RH

Duration: 10cycles (240hours)

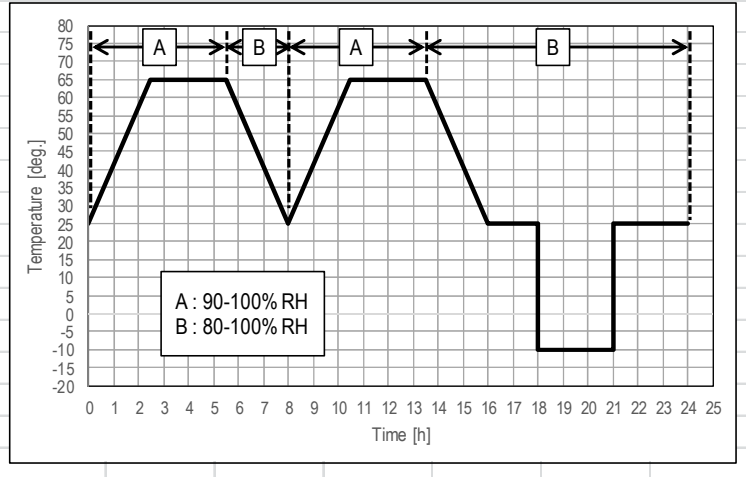

Pass criteria: Contact resistance: Shall meet 4.1.1.  
Insulation resistance: Shall meet 4.1.2.  
Dielectric withstanding voltage: Shall meet 4.1.3.  
Appearance: No abnormality adversely affecting the performance shall occur.

## 5. Salt water spray

Reference standard: MIL-STD-202G, Method 101, Condition B.

Test conditions: Solder the receptacle connector to the test board, then mate plug connector, and expose them to the following environment.

Temperature: 308±2K (35±2°C)

Salt water density: 5±1% [by weight]

Duration: 48 hours

Pass criteria: Contact resistance: Shall meet 4.1.1.  
Appearance: No abnormality adversely affecting the performance shall occur.

## 6. H<sub>2</sub>S gas

Reference standard: -

Test conditions: Solder the receptacle connector to the test board, then mate plug connector, and expose them to the following environment.

Temperature: 313±2K (40±2°C)

Relative humidity: 80±5%RH

Gas: H<sub>2</sub>S 3±1ppm

Duration: 48 hours

Pass criteria: Contact resistance: Shall meet 4.1.1.  
Appearance: No abnormality adversely affecting the performance shall occur.

## 4.4 Test Sequence and Specimen Quantity

**Table 1. Test Sequence and Sample Quantity**

Test Item	Group									
	A	B	C	D	E	F	G	H	J	K
Contact Resistance		2,6		1,3,5	1,3	1,3	1,5	1,5	1,3	1,3
Insulation Resistance							2,6	2,6		
D.W. Voltage							3,7	3,7		
Temperature rising	1									
Mating Force		1,5								
Un-mating Force		3,7								
Durability		4								
Connector Lock			1							
Vibration				2						
Shock				4						
Thermal Shock					2					
High Temperature Life						2				
Humidity (Steady State)							4			
Humidity (Cycling)								4		
Salt Water Spray									2	
H <sub>2</sub> S Gas										2
Specimen Quantity.	5 pcs.	5 pos.	5 pos.	5 pcs.	5 pcs.	5 pcs.	5 pcs.	5 pcs.	5 pcs.	5 pcs.

※Numbers indicate sequence in which tests are performed.

## 5. Precautions for Handling Cable Connectors

Refer to instruction manual : HIM-17029 for the handling of CABLINE-CA IIF.