

CABLINE®-UM

Part No. Plug: 20877-***T-0#, Receptacle: 20879-***E-01

Test Report

Product Specification no. PRS-2514

10	T26006	February 16, 2026	T.Ono	M.Nakamura	H.Ikari
9	T24079	November 29, 2024	T.Ono	M.Nakamura	T.Masunaga
8	T24062	September 11, 2024	K.Hara	T.Tanigawa	H.Ikari
7	T23036	June 26, 2023	R.Morita	M.Nakamura	T.Masunaga
Rev.	ECN	Date	Prepared by	Checked by	Approved by

1. Purpose

To evaluate the performance of CABLINE-UM Connector in accordance with PRS-2514.

2. Specimen

- (1) CABLINE-UM PLUG ASS'Y (Part No. 20877-#**T-0#)
- (2) CABLINE-UM RECEPTACLE ASSEMBLY (Part No. 20879-#**E-01)

3. Test Sequence

All the evaluations were performed in accordance with Table 1. Test Sequence.

4. Result

See Table 2-1 to 2-5, Graph 1 to 18. For the details of the testing conditions and requirements, see PRS-2514.
The “n” in the tables show the number of measurement points.

5. Conclusion

All the specimens met the requirements of PRS-2514.

Table.1 Test Sequence and Sample Quantity

No.	Test Item	Testing Groups												
		A	B	C	D	E	F	G	H	I	J	K	L	M
4.1 Electrical Performance	1	Contact resistance	2,6			1,3,5	1,3	1,3	1,5	1,5,7	1,3	1,3		
	2	Insulation resistance						2,6	2,8					
	3	Dielectric withstanding voltage						3,7	3,9					
	4	Temperature rising												1
4.2 Mechanical Performance	1	Mating force	1,5											
		Unmating force	3,7											
	2	Durability	4						4 (10cycles)					
	3	Contact retention force		1,3										
	4	Conn. Lock			1									
	5	Cable retention force	8											
	6	Vibration				2								
	7	Shock				4								
4.3 Environmental Performance	1	Thermal shock				2								
	2	High temperature life		2			2							
	3	Humidity (Steady State)						4						
	4	Humidity (Cycling)							6					
	5	Saltwater spray								2				
	6	H ₂ S gas									2			
4.4 Others	1	Solder ability										1		
	2	Soldering heat resistance											1	
Specimen quantity			5 pcs.	20 pcs.	5 pcs.	5 pcs.	5 pcs.	5 pcs.	5 pcs.	5 pcs.	5 pcs.	10 pcs.	10 pcs.	5 pcs.

※Numbers indicate test sequences.

Table.2-1 Test result

Test Item	Contents of Measurement		Specifications	Set	n	Data					Judge
						AVE.	MAX.	MIN.	s	X±3s	
A Group Durability Cable Retention Force	Contact Resistance (mΩ)	Initial	AWG#40 600mΩMAX.	5	200	428.657	460.56	406.33	12.169	465.164	Pass
		After Testing	AWG#40 ΔR=40mΩ MAX.			0.418	2.31	-1.57	0.809	2.845	Pass
	GND Resistance (mΩ)	Initial	50mΩMAX.	5	5	10.632	10.83	10.39	0.172	11.148	Pass
		After Testing	ΔR=40mΩ MAX.			-0.146	0.26	-0.84	0.413	1.093	Pass
	30P	Mating Force (N)	Initial	5	5	10.740	11.18	10.46	0.269	11.547	Pass
			After Testing			9.510	10.05	9.24	0.365	10.605	Pass
		Unmating Force (N)	Initial	5	5	8.638	9.10	8.19	0.349	10.091	Pass
			After Testing			8.446	8.76	7.87	0.353	7.387	Pass
		Cable Retention Force		14.70N MIN.	5	5	It does not pull out, even if applies the power of 100N to a terminal.				Pass
	40P	Mating Force (N)	Initial	5	5	14.632	15.51	13.97	0.589	16.399	Pass
			After Testing	5	5	13.740	14.28	13.22	0.411	14.973	Pass
		Unmating Force (N)	Initial	5	5	10.612	10.100	10.44	0.146	10.174	Pass
			After Testing	5	5	10.444	10.79	10.15	0.246	9.706	Pass
		Cable Retention Force		19.60N MIN.	5	5	It does not pull out, even if applies the power of 100N to a terminal.				Pass
	50P	Mating Force (N)	Initial	5	5	18.306	19.16	17.68	0.585	20.061	Pass
			After Testing	5	5	16.218	17.19	15.38	0.698	18.312	Pass
		Unmating Force (N)	Initial	5	5	12.142	13.30	11.68	0.689	10.0100	Pass
			After Testing	5	5	11.966	12.100	11.28	0.526	10.388	Pass
		Cable Retention Force		24.60N MIN.	5	5	It does not pull out, even if applies the power of 100N to a terminal.				Pass

Table.2-2 Test result

Test Item	Contents of Measurement			Specifications	Set	n	Data					Judge
							AVE.	MAX.	MIN.	s	X±3s	
A Group Durability Cable Retention Force	60P	Mating Force (N)	Initial	52.0N MAX.	5	5	19.892	20.63	19.22	0.684	21.944	Pass
			After Testing	52.0N MAX.	5	5	18.142	18.63	11004	0.458	19.516	Pass
		Unmating Force (N)	Initial	6.0N MIN.	5	5	14.206	15.20	13.20	0.818	11.1002	Pass
			After Testing	6.0N MIN.	5	5	13.858	14.83	13.28	0.616	12.010	Pass
		Cable Retention Force			29.40N MIN.	5	5	It does not pull out, even if applies the power of 100N to a terminal.				
	70P	Mating Force (N)	Initial	58.0N MAX.	5	5	24.154	25.01	23.04	0.923	26.923	Pass
			After Testing	58.0N MAX.	5	5	22.234	23.55	21.27	0.919	24.991	Pass
		Unmating Force (N)	Initial	7.0N MIN.	5	5	17.406	17.94	16.81	0.523	15.837	Pass
			After Testing	7.0N MIN.	5	5	16.920	17.99	15.88	0.747	14.679	Pass
		Cable Retention Force			34.30N MIN.	5	5	It does not pull out, even if applies the power of 100N to a terminal.				
B Group High Temperature Life	(Receptacle) Contact Retention Force (N)		Initial	0.2N MIN.	-	20	1.240	1.42	1.08	0.079	1.003	Pass
			After Testing	0.2N MIN.	-	20	0.969	1.19	0.80	0.105	0.654	Pass
C Group Conn. Lock			Initial	The lock does not damage and cancel.	5	5	No Abnormality					Pass
D Group Vibration ↓ Shock	Contact Resistance (mΩ)		Initial	AWG#40 600mΩMAX.	5	200	428.129	453.00	399.17	13.800	469.529	Pass
			After Vibration	AWG#40 ΔR=40mΩ MAX.			1.270	4.52	-2.43	1.289	5.137	Pass
			After Shock	AWG#40 ΔR=40mΩ MAX.			2.478	4.98	-1.25	1.365	6.573	Pass
	GND Resistance (mΩ)		Initial	50mΩMAX.	5	5	11.186	12.30	10.08	0.883	13.835	Pass
			After Vibration	ΔR=40mΩ MAX.			0.062	0.68	-0.88	0.614	1.904	Pass
			After Shock	ΔR=40mΩ MAX.			0.004	0.65	-0.40	0.419	1.261	Pass
	Electrical discontinuity		During Vibration	1μsec. MAX.	5	5	No Electrical discontinuity					Pass
	Appearance		After Vibration	No abnormality adversely affecting the performance shall occur.	5	5	No Abnormality					Pass
			After Shock				No Abnormality					Pass

Table.2-3 Test Result

Test Item	Contents of Measurement		Specifications	Set	n	Data					Judge
						AVE.	MAX.	MIN.	s	$\bar{X} \pm 3s$	
E Group Thermal Shock	Contact Resistance (mΩ)	Initial	AWG#40 600mΩMAX.	5	200	430.424	448.54	414.10	7.496	452.912	Pass
		After Testing	AWG#40 ΔR=40mΩ MAX.			11.196	17.07	5.52	2.173	17.715	Pass
	GND Resistance (mΩ)	Initial	50mΩMAX.	5	5	11.198	11.77	10.80	0.416	12.446	Pass
		After Testing	ΔR=40mΩ MAX.			0.044	0.53	-0.50	0.367	1.145	Pass
F Group High Temperature Life	Contact Resistance (mΩ)	Initial	AWG#40 600mΩMAX	5	200	424.075	452.24	397.77	14.763	468.364	Pass
		After Testing	AWG#40 ΔR=40mΩ MAX.			-1.101	4.01	-5.88	1.803	4.308	Pass
	GND Resistance (mΩ)	Initial	50mΩMAX.	5	5	10.996	12.24	10.27	0.772	13.312	Pass
		After Testing	ΔR=40mΩ MAX.			0.344	0.60	0.14	0.181	0.887	Pass
G Group Humidity (Steady State)	Contact Resistance (mΩ)	Initial	AWG#40 600mΩMAX	5	200	424.826	437.94	413.40	6.844	445.358	Pass
		After Testing	AWG#40 ΔR=40mΩ MAX.			-0.494	2.41	-3.03	0.986	2.464	Pass
	GND Resistance (mΩ)	Initial	50mΩMAX.	5	5	11.380	11.61	11.06	0.205	11.995	Pass
		After Testing	ΔR=40mΩ MAX.			-0.184	0.05	-0.39	0.160	0.296	Pass
	Insulation Resistance (MΩ)	Initial	1000MΩMIN.	5	100	1.4×10 ⁵ MΩMIN.					Pass
		After Testing	500MΩMIN.			3.4×10 ⁴ MΩMIN.					Pass
	D. W. Voltage	Initial	No abnormality adversely affecting the performance shall occur.	5	100	No Abnormality					Pass
		After Testing				No Abnormality					Pass

Table.2-4 Test result


Test Item	Contents of Measurement		Specifications	Set	n	Data					Judge
						AVE.	MAX.	MIN.	s	$X \pm 3s$	
H Group Humidity (Cycling)	Contact Resistance (mΩ)	Initial	AWG#40 600mΩMAX.	5	200	417.913	455.84	401.55	15.317	463.864	Pass
		After Durability	AWG#40 ΔR=40mΩ MAX.			-1.095	2.38	-3.41	1.251	2.658	Pass
		After Testing	AWG#40 ΔR=40mΩ MAX.			0.0100	3.50	-3.28	1.316	4.023	Pass
	GND Resistance (mΩ)	Initial	50mΩMAX.	5	5	11.436	11.63	11.18	0.171	11.949	Pass
		After Durability	ΔR=40mΩ MAX.			-0.212	-0.04	-0.38	0.130	0.178	Pass
		After Testing	ΔR=40mΩ MAX.			-0.066	0.16	-0.40	0.217	0.585	Pass
	Insulation Resistance (MΩ)	Initial	1000MΩMIN.	5	100	1.7×10 ⁵ MΩMIN.					Pass
		After Testing	500MΩMIN.			2.4×10 ⁴ MΩMIN.					Pass
	D. W. Voltage	Initial	No abnormality adversely affecting the performance shall occur.	5	100	No Abnormality					Pass
		After Testing				No Abnormality					Pass
I Group Salt Water Spray	Contact Resistance (mΩ)	Initial	AWG#40 600mΩMAX.	5	200	423.830	455.28	405.78	12.941	462.653	Pass
		After Testing	AWG#40 ΔR=40mΩ MAX.			1.673	6.33	-3.12	1.877	7.304	Pass
	GND Resistance (mΩ)	Initial	50mΩMAX.	5	5	10.928	11.07	10.86	0.085	11.183	Pass
		After Testing	ΔR=40mΩ MAX.			1.268	1.86	0.94	0.356	2.336	Pass
J Group H2S Gas	Contact Resistance (mΩ)	Initial	AWG#40 600mΩMAX.	5	200	429.904	443.95	418.40	6.978	450.838	Pass
		After testing	AWG#40 ΔR=40mΩ MAX.			-0.821	1.48	-3.03	0.785	1.534	Pass
	GND 抵抗 GND Resistance (mΩ)	Initial	50mΩMAX.	5	5	11.690	11.80	11.52	0.113	12.029	Pass
		After Testing	ΔR=40mΩ MAX.			0.098	0.20	-0.01	0.097	0.389	Pass

Table.2-5 Test Result


Test Item	Contents of Measurement	Specifications	Set	n	Data					Judge
					AVE.	MAX.	MIN.	s	$\bar{X} \pm 3s$	
K Group Solderability	Appearance	More than 95% of the dipped surface shall be evenly wet.	10	10	Wet 95% MIN.					Pass
L Group Soldering Heat Resistance	Appearance	No abnormality adversely affecting the performance shall occur.	10	10	No Abnormality					Pass
M Group Temperature Rising	AWG#44 0.15A/Contact	$\Delta T = 30^{\circ}\text{C}$ MAX.	10	10	$\Delta T = 22.8^{\circ}\text{C}$ MAX.					Pass

* The Temperature Rising Test is a result when applied ratings current (0.15A/contact) between the neighboring contacts for sixty pos. (With the whole connector 9.0A.)


Graph.1

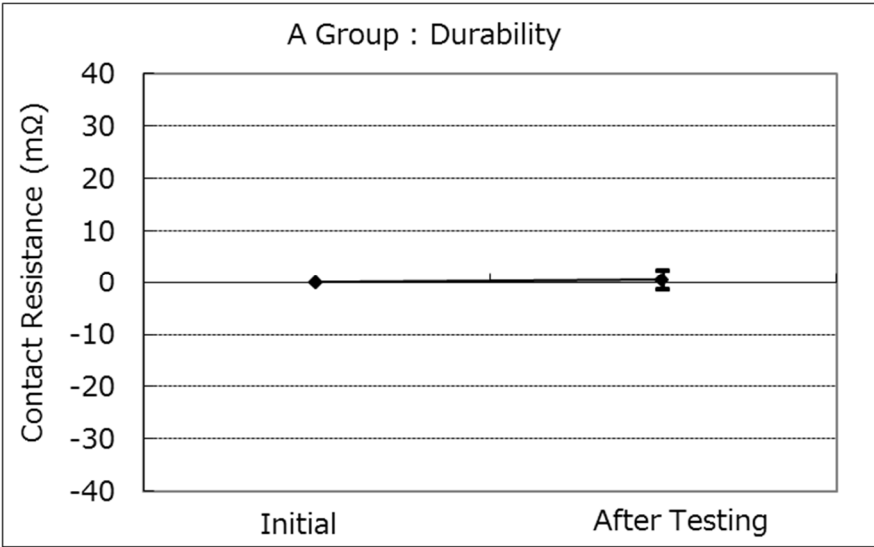


Graph.2

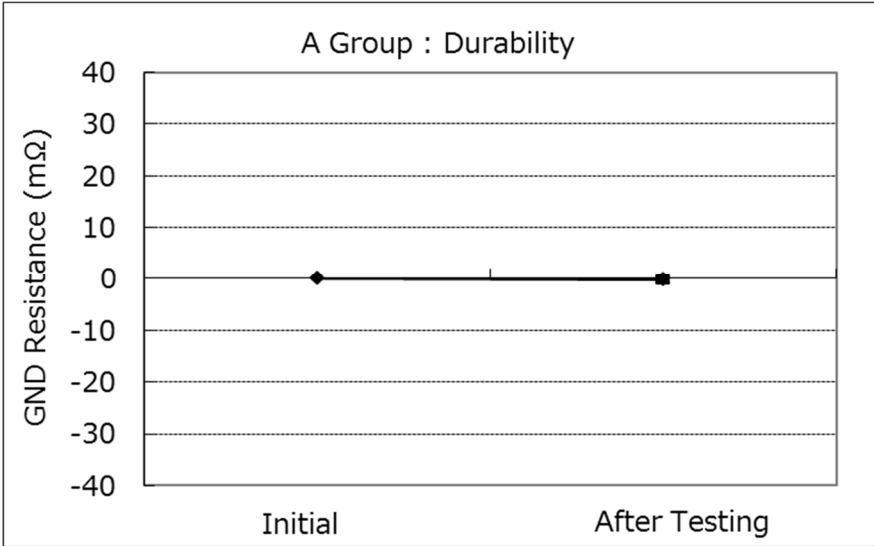


Graph.3

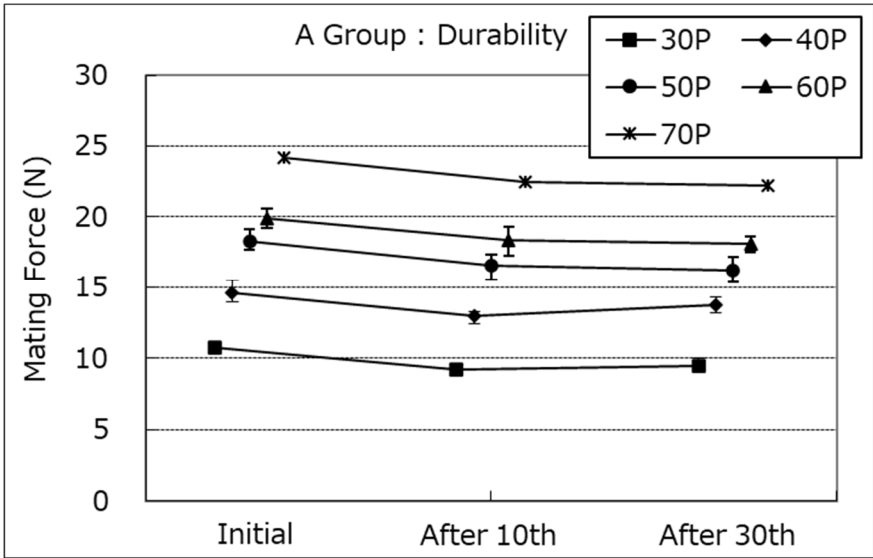


Graph.4

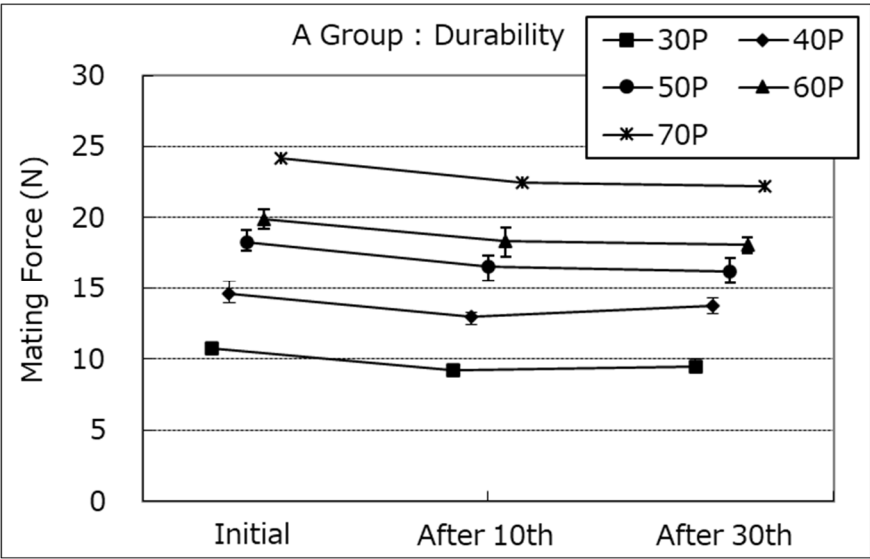


Graph.5

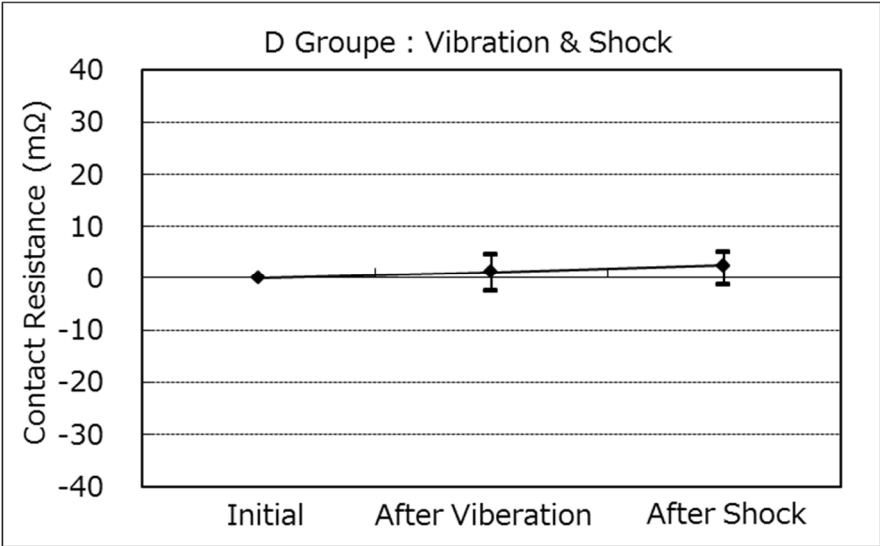


Graph.6

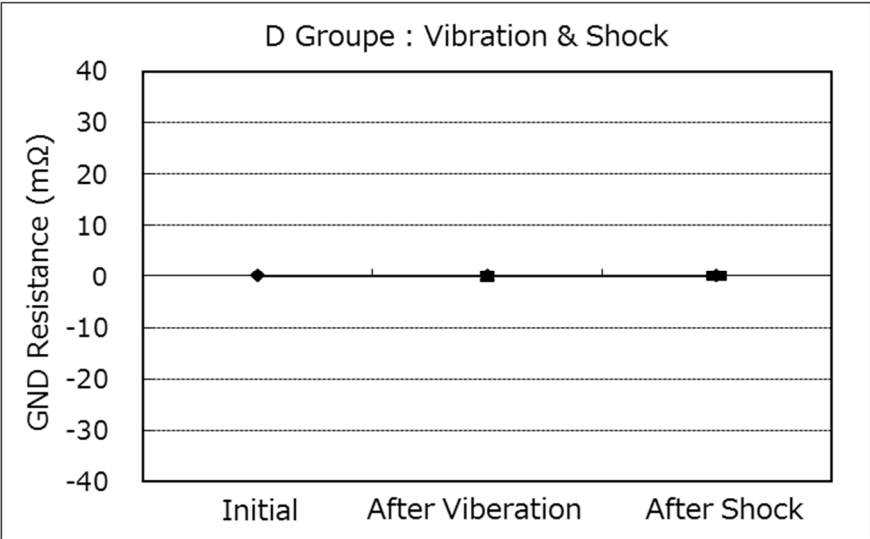


Graph.7

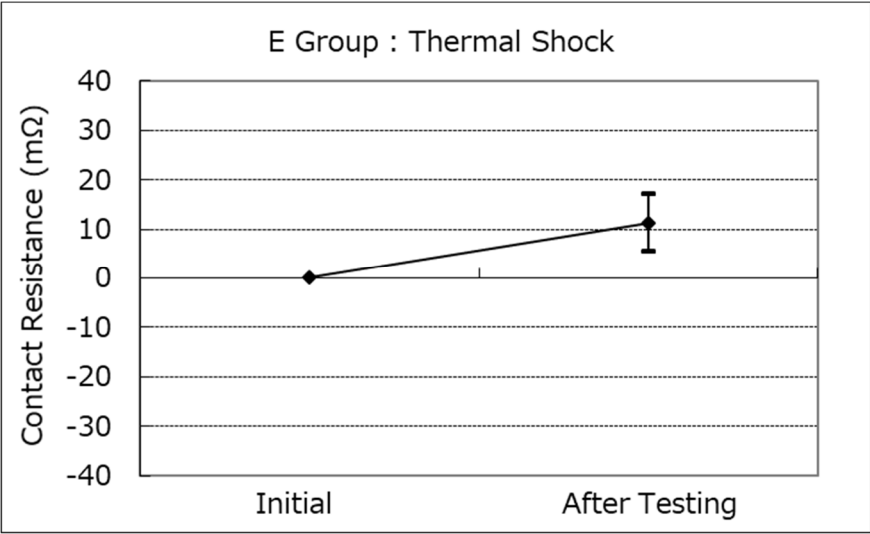


Graph.8

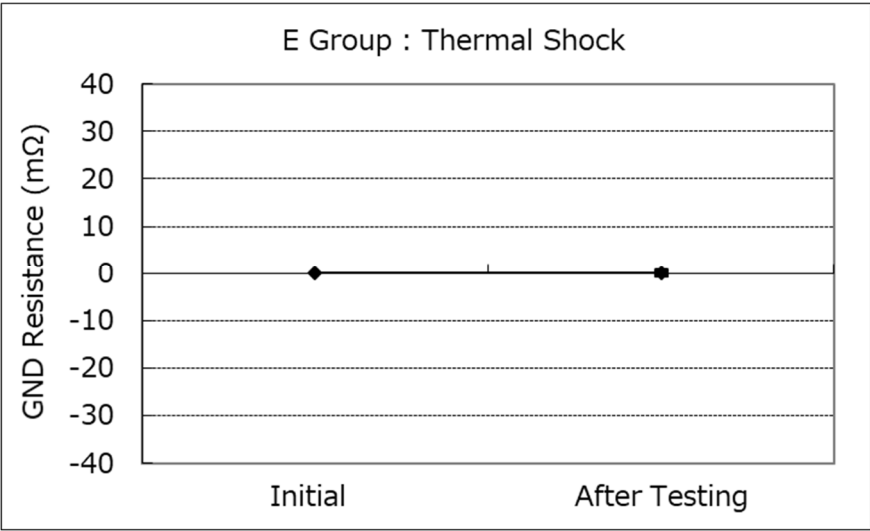


Graph.9

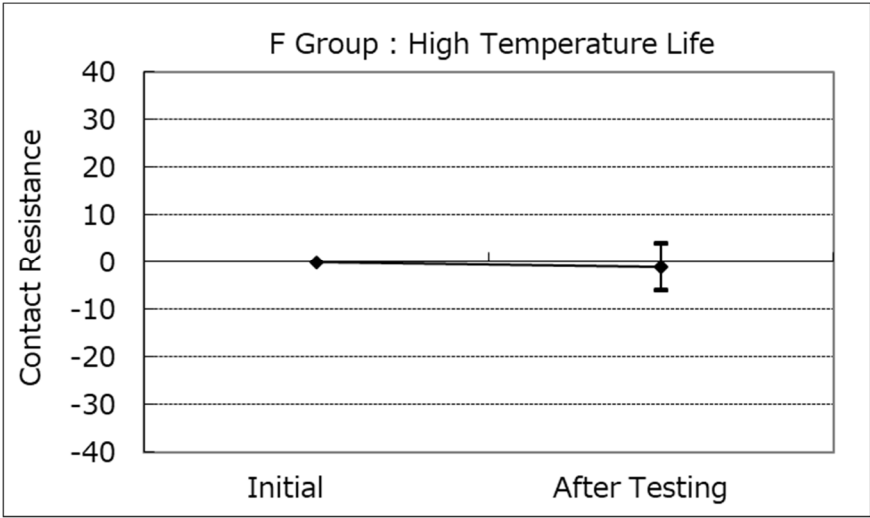


Graph.10

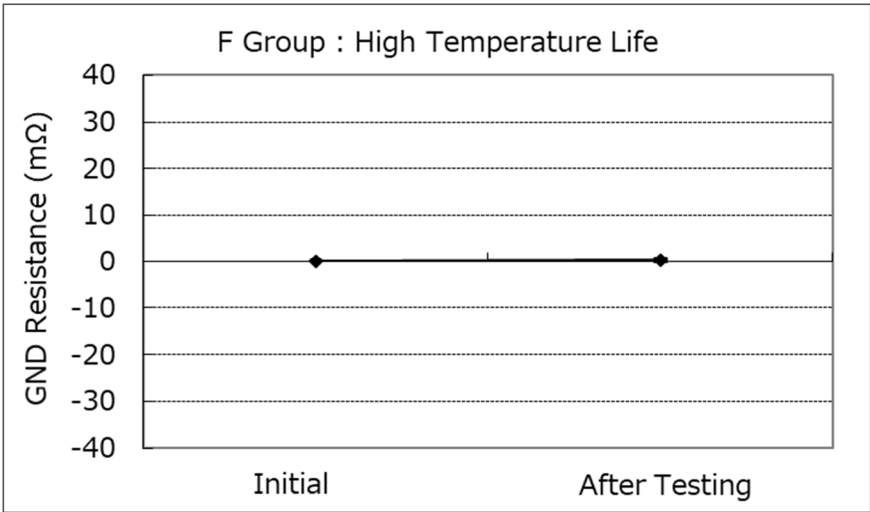


Graph.11

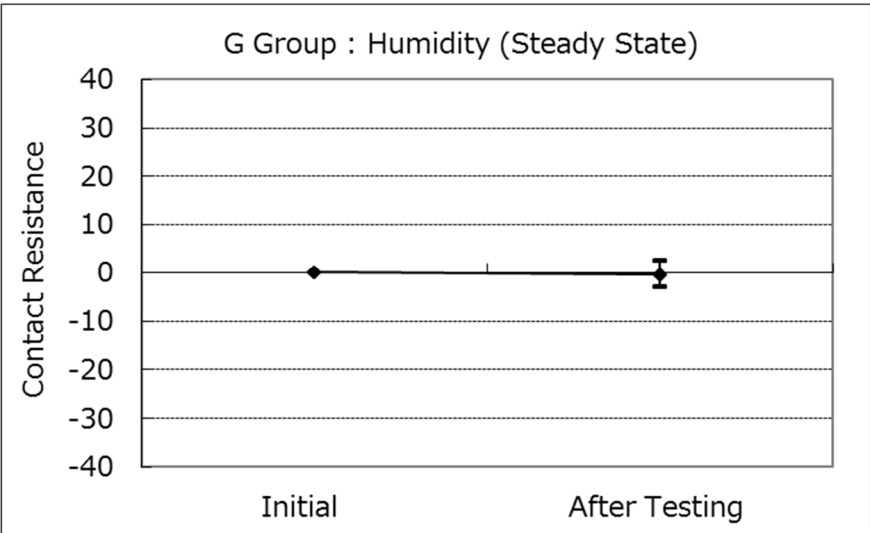


Graph.12

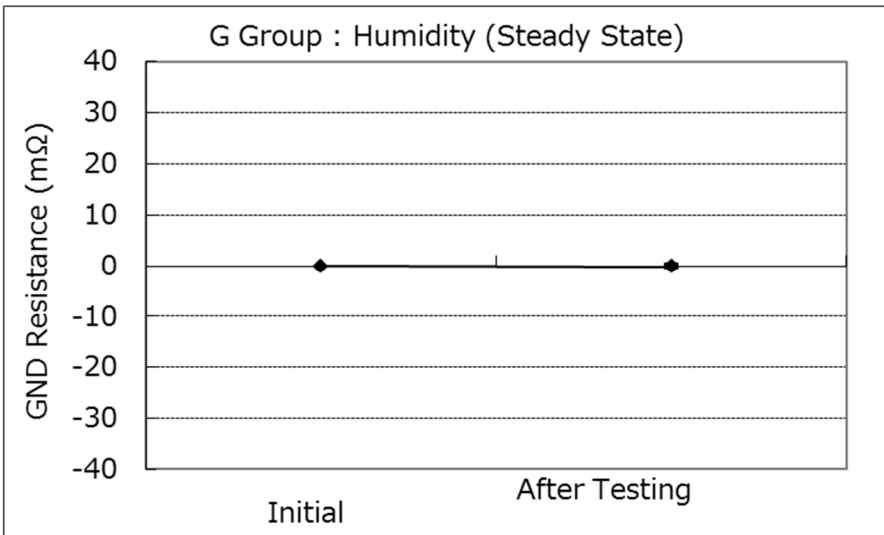


Graph.13

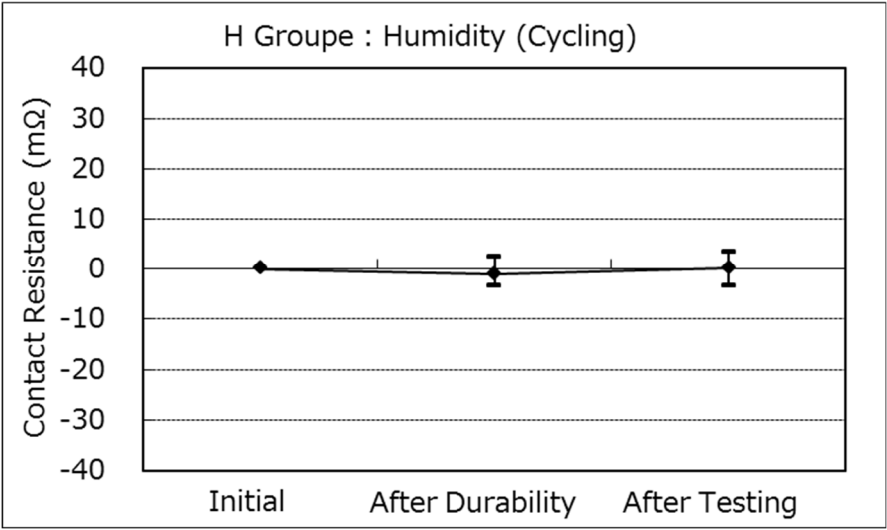


Graph.14

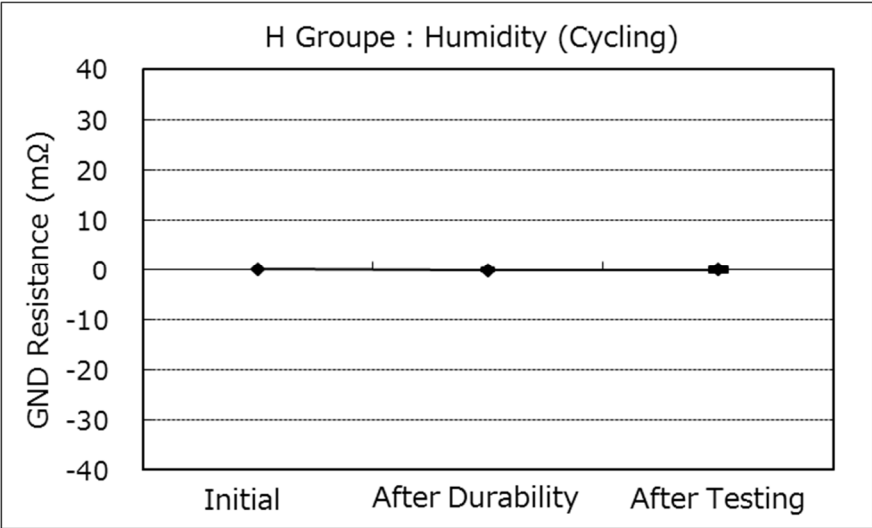


Graph.15

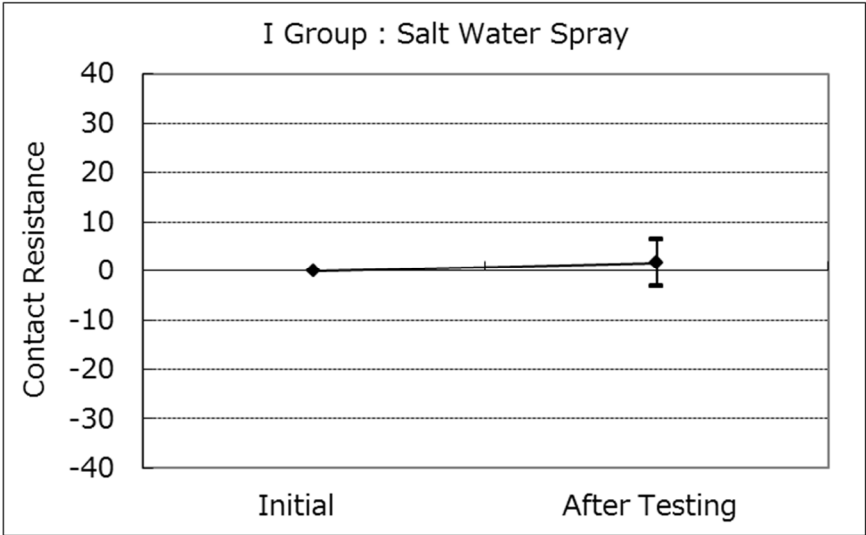

Graph.16

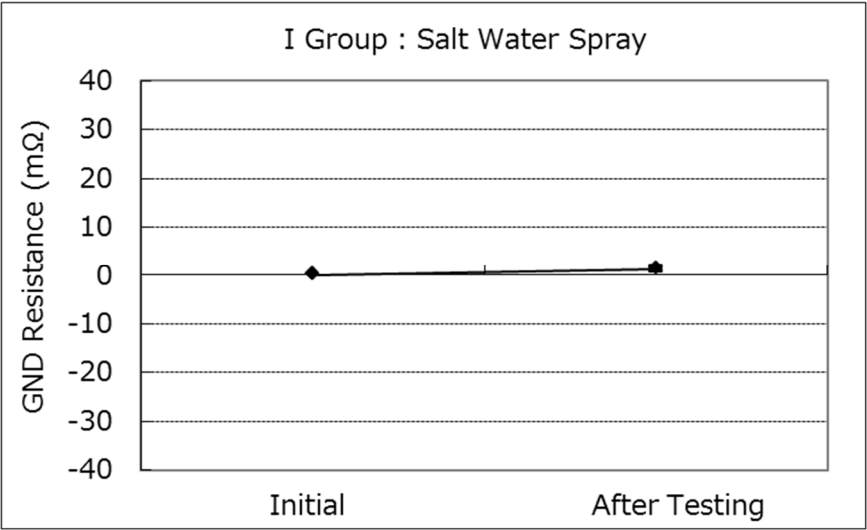

Graph.17

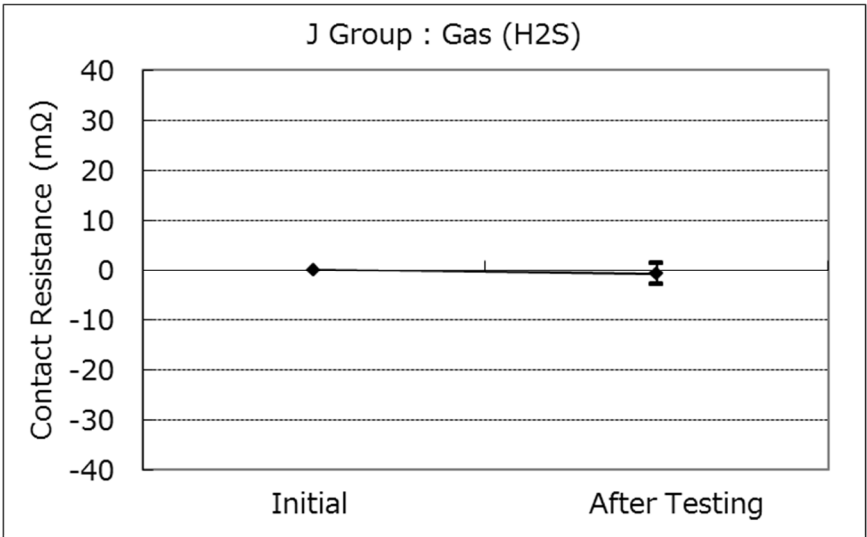

Graph.18

