

ISH® HORIZONTAL

Test Report

Product Specification no. PSS-0034

1	T26083	October 1, 2026	M.Yoneda	K.Tsusu	T.Takeda
0	RS0942	June 14, 2023	Y. Nishimura	J. Mukunoki	J. Tateishi
Rev.	ECN	Date	Prepared by	Checked by	Approved by

1. Purpose

To evaluate performance of ISH Connector.

2. Specimen

Items shown in Table 1 were evaluated.

Pole	TYPE		PARTS No.				Test result
	LOCK	KEY CODING	MALE ASS'Y	FEMALE HOUSING	RETAINER	FEMALE TERMINAL	
3P	STANDARD LOCK	A	V0111-003E-01	V0113-91003-01	-	VT009-01 VT009-02	Initial properties : Sheet 3 Durability test: Sheet 4～5
6P	STANDARD LOCK	A	V0114-006E-01	V0116-91006-01	V0116-92006-01		Initial properties : Sheet 6 Durability test: Sheet 7～8
	STANDARD LOCK	B	V0114-006E-11	V0116-91006-11			
8P	INERTIA LOCK	A	V0114-008E-02	V0116-91008-02	V0116-92008-01		Initial properties : Sheet 9 Durability test: Sheet 10～11
	INERTIA LOCK	B	V0114-008E-12	V0116-91008-12			
	INERTIA LOCK	C	V0114-008E-22	V0116-91008-22			
	INERTIA LOCK	D	V0114-008E-032	V0116-91008-32			
	INERTIA LOCK	A	V0114-008E-02	V0116-91008-03			
12P	STANDARD LOCK	A	V0114-012E-001	V0116-91012-01 V0116-91012-02	V0116-92012-01		Initial properties : Sheet 12 Durability test: Sheet 13～14
	STANDARD LOCK	B	V0114-012E-11	V0116-91012-11			
	INERTIA LOCK	C	V0114-012E-21	V0116-91012-21 V0116-93012-22			Initial properties : Sheet 15 Durability test: Sheet 16～17
	INERTIA LOCK	D	V0114-012E-31	V0116-91012-31			
	INERTIA LOCK	B	V0114-012E-12	V0116-91012-12			
16P	INERTIA LOCK	-	V0114-016E-01	V0116-91016-01 V0116-91016-02	V0116-92016-01		Initial properties : Sheet 18 Durability test: Sheet 19～20
20P	INERTIA LOCK	-	V0114-020E-01	V0116-91020-01	V0116-92020-01		Initial properties : Sheet 21 Durability test: Sheet 22～23
32P	STANDARD LOCK	-	V0114-032E-**	V0116-91032-02	V0116-92032-01	VT009-02	Initial properties : Sheet 24 Durability test: Sheet 25～26

3. Test condition

In compliance with Product Specification 【PSS-0034】

4. Result

All test items were satisfied.

- For detail of the test results see of Table1.
- For resistance monitoring during durability test, see Graphs 2 and 3.

For the number of pins listed for both VT009-01 and VT009-02, the results for VT009-01 are presented as the representative results, except for the following items:

- Connector mating Force
(Since the inertia lock mechanism is not dependent on the FEMALE TERMINAL, the result is presented for one side only.)
- Connector unmating Force
- Fretting corrosion

Table 2. List of results: Initial properties (3P)

	Measurement		Requirements		Set	n	Unit	Data				Judgement
								Avg	Max	Min	s	
Initial Characteristics	Terminal appearance		No detrimental deformation		5	5	-	No detrimental deformation				✓
	Terminal outer dimension		Satisfy drawing dimension		5	5	-	Satisfies drawing dimension				✓
	Housing appearance		No detrimental deformation		5	5	-	No detrimental deformation				✓
	Housing outer dimension		Satisfy drawing dimension		5	5	-	Satisfies drawing dimension				✓
	Feeling (insertion/removal)		No discomfort		5	5	-	No discomfort				✓
	Connector mating force	VT009-01	22N MAX.		5	5	N	12.78	14.0	12.2	0.70	✓
		VT009-02	22N MAX.		5	5	N	13.32	13.9	12.9	0.37	✓
	Connector unmating force	VT009-01	12N MAX.		5	5	N	9.56	10.5	9.1	0.57	✓
		VT009-02	12N MAX.		5	5	N	9.90	10.4	9.2	0.45	✓
	Connector retention force	Direction 1	90N MIN.		5	5	N	109.36	109.9	108.4	0.67	✓
		Direction 2	90N MIN.		5	5	N	172.88	179.0	166.9	5.67	✓
		Direction 3	90N MIN.		5	5	N	113.36	127.2	100.8	12.36	✓
		Direction 4	90N MIN.		5	5	N	127.86	137.0	116.2	8.48	✓
	Unlocking force		50N MAX.		5	5	N	18.70	19.1	18.2	0.36	✓
	Insulation resistance	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓	
			(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓	
	Withstanding voltage	No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓	
			(b) Between terminal and earth	5	5	-	No insulation breakdown				✓	
	Temperature rise	Single pin	ΔT=50℃ MIN.		5	5	℃	37.08	39.1	35.1	1.63	✓
		All pin	ΔT=50℃ MIN.		5	5	℃	41.68	44.6	39.6	1.81	✓
	Leak current		1mA MAX.		5	5	-	1μA MAX.				✓
	Coplanarity	Terminal	0.1mm MAX.		5	5	mm	0.02mm Max.				✓
		Hold down	0.1mm MAX.		5	5	mm	0.04mm Max.				✓
	Peg strength	Position 1	70N MIN.		5	5	N	97.85	107.8	88.4	7.34	✓
		Position 2	100N MIN.		5	5	N	168.15	169.5	167.4	0.85	✓
		Position 3	100N MIN.		5	5	N	411.15	458.5	361.0	39.27	✓
	Lead strength		30N MIN.		5	15	N	37.94	41.8	32.1	3.30	✓
	Audible click		60dB MIN.		5	5	db	65.82	67.5	60.9	2.77	✓
	Terminal crimp strength		70N MIN.		5	5	N	79.24	80.8	77.9	1.27	✓
	Terminal insertion force		0.5N~3.0N		5	5	N	1.780	1.96	1.52	0.147	✓
	Terminal removal force		0.5N~3.0N		5	5	N	1.915	2.26	1.44	0.255	✓
	Terminal contact force		3N MIN.		5	5	N	3.58	3.73	3.33	0.15	✓
	Terminal bend strength	a	Must not bend 1mm or over		5	5	-	0mm (Not bend in the initial position.)				✓
		b	Terminal bending 30°MAX		5	5	-	Terminal bending 10°MAX				✓
	Voltage drop		10mV/A MAX.		5	15	mV/A	1.618	1.98	1.08	0.335	✓
	Dry circuit resistance		10mΩ MAX.		5	15	mΩ	2.140	2.32	1.88	0.116	✓
Terminal retention force	With secondary lock	49N MIN.		2	6	N	83.88	85.4	80.7	1.71	✓	
	Without secondary lock	20N MIN.		2	6	N	43.12	45.2	40.8	1.41	✓	
Terminal to housing insertion force		10N MAX.		2	6	N	1.908	2.21	1.62	0.166	✓	
Retainer insertion/removal force	Insertion force	29.4N MAX.		5	5	N	17.34	18.1	16.4	0.63	✓	
	Removal force	5.5N MIN.		5	5	N	22.64	26.8	17.5	4.08	✓	
Housing lock strength without terminals		49N MIN.		5	5	N	98.86	102.6	94.5	3.72	✓	
Sn whisker		125μm MAX.		5	5	-	No whisker				✓	

Table 3. List of results: Properties after endurance tests – I (3P)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Repeated insertion/removal	Connector mating force	After 5 repeat	22N MAX.	5	5	N	9.33	10.9	8.5	0.98	✓	
		After test	22N MAX.	5	5	N	7.16	8.0	6.6	0.55	✓	
	Connector unmating force	After 5 repeat	12N MAX.	5	5	N	8.85	9.4	8.7	0.32	✓	
		After test	12N MAX.	5	5	N	6.25	6.7	5.8	0.38	✓	
	Voltage drop	Initial	10mV/A MAX.	5	15	mV/A	2.523	3.04	1.98	0.353	✓	
		After test	20mV/A MAX.	5	15	mV/A	2.836	3.10	2.57	0.148	✓	
Resistance to forcedmating	Connector mating force		22N MAX.	5	5	N	9.28	11.1	8.5	1.12	✓	
	Connector unmating force		12N MAX.	5	5	N	7.86	8.5	7.3	0.46	✓	
	Voltage drop	Initial	10mV/A MAX.	5	15	mV/A	2.509	3.39	1.89	0.535	✓	
		After test	20mV/A MAX.	5	15	mV/A	2.479	3.05	1.88	0.354	✓	
Fretting corrosion	Dry circuit resistance	Monitor dry circuit resistance during test.	20mΩMAX.	5	5	mΩ	See Graph 1 on Sheet 25				✓	
Thermal a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	108.23	109.2	106.7	0.95	✓	
	Terminal crimp strength		70N MIN.	5	5	N	78.03	80.0	75.5	1.76	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	15	mΩ	2.581	3.50	2.02	0.373	✓	
		After test	20mΩ MAX.	5	15	mΩ	3.230	4.64	2.08	0.700	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	6	N	82.73	84.4	80.9	1.14	✓	
		Without secondary lock	20N MIN.	2	6	N	47.68	50.3	44.7	1.84	✓	
	Housing lock strength without terminals		49N MIN.	5	5	N	109.70	111.1	109.1	0.85	✓	
Low temperature a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	15	mΩ	2.817	2.97	2.62	0.100	✓	
		After test	20mΩ MAX.	5	15	mΩ	2.815	3.17	2.43	0.186	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	6	N	82.98	84.2	79.4	1.83	✓	
		Without secondary lock	20N MIN.	2	6	N	47.67	50.3	44.7	1.83	✓	
Housing lock strength without terminals		49N MIN.	5	5	N	109.42	110.7	108.4	0.91	✓		
Thermal shock	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	106.69	107.8	105.4	0.95	✓	
	Terminal crimp strength		70N MIN.	5	5	N	78.02	80.1	75.9	1.67	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	15	mΩ	2.773	2.90	2.57	0.082	✓	
		After test	20mΩ MAX.	5	15	mΩ	3.355	3.84	2.78	0.336	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	6	N	83.24	84.5	82.7	0.71	✓	
		Without secondary lock	20N MIN.	2	6	N	46.58	51.8	41.1	3.50	✓	
Temperature /humidity cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	15	mΩ	2.709	3.12	2.14	0.289	✓	
		After test	20mΩ MAX.	5	15	mΩ	3.213	4.26	2.69	0.465	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	6	N	83.83	84.4	82.4	0.76	✓	
Without secondary lock		20N MIN.	2	6	N	46.58	49.7	43.8	2.50	✓		
Resistance to humidity	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	113.90	116.0	113.0	1.24	✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	

Table 4. List of results: Properties after endurance tests – II (3P)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Ave	Max	Min	s		
Resistance to humidity	Dry circuit resistance	Initial	10mΩ MAX.	5	15	mΩ	2.743	3.39	2.27	0.314	✓	
		After test	20mΩ MAX.	5	15	mΩ	2.704	3.61	2.40	0.326	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	6	N	84.27	84.9	83.2	0.62	✓	
		Without secondary lock	20N MIN.	2	6	N	42.20	43.7	40.1	1.27	✓	
Resistance to abrasion	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Voltage drop	Initial	10mV/A MAX.	5	15	mV/A	1.686	2.06	1.18	0.267	✓	
		After test	20mV/A MAX.	5	15	mV/A	1.549	2.79	1.19	0.388	✓	
Corrosion gas	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Terminal crimp strength		70N MIN.	5	5	N	80.80	83.1	78.1	1.81	✓	
	Voltage drop	Initial	10mV/A MAX.	5	15	mV/A	2.199	2.62	1.94	0.194	✓	
		After test	20mV/A MAX.	5	15	mV/A	2.984	3.88	2.48	0.441	✓	
Resistance to stress corrosion	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal crimp strength		70N MIN.	5	5	N	82.67	83.9	81.5	0.93	✓	
Condensation	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	15	mΩ	2.364	2.83	1.87	0.311	✓	
		After test	20mΩ MAX.	5	15	mΩ	2.961	4.61	2.10	0.825	✓	
Dump heat cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Insulation resistance	250h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		500h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		750h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		1000h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Migration		No migration	5	5	-	No migration				✓	
Current cycle	Temperature rise		ΔT=50℃ MAX.	5	5	℃	41.68	44.6	39.6	1.81	✓	
	Voltage drop	Initial	10mV/A MAX.	5	15	mV/A	2.691	3.04	2.38	0.212	✓	
		After test	20mV/A MAX.	5	15	mV/A	2.745	3.76	2.11	0.415	✓	
Shock	Voltage drop	Initial	10mV/A MAX.	5	15	mV/A	1.688	2.45	1.28	0.393	✓	
		After test	20mV/A MAX.	5	15	mV/A	2.022	3.00	1.45	0.379	✓	
	Microcut		1μsMIN 7ΩMAX.	5	5	-	No microcut				✓	
Vibration	Temperature rise		ΔT=50℃ MAX.	5	5	℃	39.84	42.7	37.5	2.59	✓	
	Voltage drop	Initial	10mV/A MAX.	5	15	mV/A	2.571	2.74	1.80	0.232	✓	
		After test	20mV/A MAX.	5	15	mV/A	2.581	3.30	1.90	0.446	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	15	mΩ	2.940	3.53	2.53	0.313	✓	
		After test	20mΩ MAX.	5	15	mΩ	3.311	5.16	2.43	0.779	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	
Vibration with temperature change	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal contact force		3N MIN.	5	5	N	3.438	3.56	3.35	0.093	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	3	9	mΩ	2.772	3.03	2.46	0.171	✓	
		After test	20mΩ MAX.	3	9	mΩ	7.981	12.75	1.41	4.636	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	

Table 5. List of results: Initial properties (6P)

	Measurement		Requirements	Set	n	Unit	Data				Judgement
							Avg	Max	Min	s	
Initial Characteristics	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Terminal outer dimension		Satisfy drawing dimension	5	5	-	Satisfies drawing dimension				✓
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Housing outer dimension		Satisfy drawing dimension	5	5	-	Satisfies drawing dimension				✓
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓
	Connector mating force	VT009-01	34N MAX.	5	5	N	22.70	24.5	20.6	1.74	✓
		VT009-02	34N MAX.	5	5	N	19.94	23.7	18.8	2.11	✓
	Connector unmating force	VT009-01	24N MAX.	5	5	N	20.36	21.7	19.1	0.96	✓
		VT009-02	24N MAX.	5	5	N	18.20	19.6	16.7	1.29	✓
	Connector retention force	Direction 1	90N MIN.	5	5	N	115.52	119.9	108.3	4.50	✓
		Direction 2	90N MIN.	5	5	N	179.94	188.3	171.4	6.08	✓
		Direction 3	90N MIN.	5	5	N	147.80	152.3	144.2	2.91	✓
		Direction 4	90N MIN.	5	5	N	177.26	201.4	151.7	18.76	✓
	Unlocking force		50N MAX.	5	5	N	19.96	20.3	19.6	0.34	✓
	Insulation resistance	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
			(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage	No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
			(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Temperature rise	Single pin	ΔT=50℃ MIN.	5	5	℃	31.82	33.1	29.1	1.60	✓
		All pin	ΔT=50℃ MIN.	5	5	℃	36.32	39.3	33.1	2.54	✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓
	Coplanarity	Terminal	0.1mm MAX.	5	5	mm	0.02mm Max.				✓
		Hold down	0.1mm MAX.	5	5	mm	0.06mm Max.				✓
	Peg strength	Position 1	70N MIN.	5	5	N	86.20	92.9	80.1	5.83	✓
		Position 2	100N MIN.	5	5	N	122.85	145.4	107.3	16.83	✓
		Position 3	100N MIN.	5	5	N	588.62	603.7	570.7	12.62	✓
	Lead strength		30N MIN.	2	12	N	36.98	42.0	32.1	3.15	✓
	Audible click		60dB MIN.	5	5	db	64.26	66.5	62.5	1.63	✓
	Terminal crimp strength		70N MIN.	5	5	N	79.24	80.8	77.9	1.27	✓
	Terminal insertion force		0.5N~3.0N	5	5	N	1.780	1.96	1.52	0.147	✓
	Terminal removal force		0.5N~3.0N	5	5	N	1.915	2.26	1.44	0.255	✓
	Terminal contact force		3N MIN.	5	5	N	3.58	3.73	3.33	0.15	✓
	Terminal bend strength	a	Must not bend 1mm or over	5	5	-	0mm (Not bend in the initial position.)				✓
		b	Terminal bending 30°MAX	5	5	-	Terminal bending 10°MAX				✓
	Voltage drop		10mV/A MAX.	5	30	mV/A	1.771	2.17	1.17	0.244	✓
	Dry circuit resistance		10mΩ MAX.	5	30	mΩ	1.842	2.36	1.29	0.220	✓
	Terminal retention force	With secondary lock	49N MIN.	2	12	N	85.09	95.6	80.4	3.76	✓
		Without secondary lock	20N MIN.	2	12	N	41.40	46.5	38.8	2.55	✓
	Terminal to housing insertion force		10N MAX.	2	12	N	2.17	2.6	1.5	0.38	✓
	Retainer insertion/removal force	Insertion force	29.4N MAX.	5	5	N	7.89	8.1	7.7	0.12	✓
		Removal force	5.5N MIN.	5	5	N	11.13	13.7	10.1	1.51	✓
	Housing lock strength without terminals		49N MIN.	5	5	N	101.68	102.9	100.5	0.97	✓
	Sn whisker		125μm MAX.	5	5	-	No whisker				✓

Table 6. List of results: Properties after endurance tests – I (6P)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement
							Avg	Max	Min	s	
Repeated insertion/removal	Connector mating force	After 5 repeat	34N MAX.	5	5	N	19.58	20.6	18.8	0.76	✓
		After test	34N MAX.	5	5	N	15.80	17.4	14.7	1.04	✓
	Connector unmating force	After 5 repeat	24N MAX.	5	5	N	19.67	20.9	18.8	0.87	✓
		After test	24N MAX.	5	5	N	12.44	12.9	11.9	0.36	✓
	Voltage drop	Initial	10mV/A MAX.	5	30	mV/A	1.926	2.70	1.32	0.401	✓
		After test	20mV/A MAX.	5	30	mV/A	1.801	3.16	1.28	0.381	✓
Resistance to forcedmating	Connector mating force		34N MAX.	5	5	N	19.78	22.5	17.1	2.18	✓
	Connector unmating force		24N MAX.	5	5	N	16.62	18.4	15.4	1.22	✓
	Voltage drop	Initial	10mV/A MAX.	5	30	mV/A	2.094	3.40	1.43	0.460	✓
		After test	20mV/A MAX.	5	30	mV/A	2.121	3.52	1.52	0.396	✓
Fretting corrosion	Dry circuit resistance	Monitor dry circuit resistance during test.	20mΩMAX.	5	5	mΩ	See Graph 1 on Sheet 25				✓
Thermal a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓
	Connector retention force	Direction 1	100N MIN.	5	5	N	115.62	118.4	113.8	1.85	✓
	Terminal crimp strength		70N MIN.	5	5	N	79.04	80.6	76.9	1.68	✓
	Dry circuit resistance	Initial	10mΩ MAX.	5	30	mΩ	2.071	2.90	1.30	0.301	✓
		After test	20mΩ MAX.	5	30	mΩ	2.706	4.84	1.41	0.673	✓
	Terminal retention force	With secondary lock	49N MIN.	2	12	N	82.57	85.1	78.4	2.48	✓
		Without secondary lock	20N MIN.	2	12	N	43.95	47.3	40.8	2.23	✓
	Housing lock strength without terminals		49N MIN.	5	5	N	110.06	112.1	108.6	1.33	✓
Low temperature a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓
	Dry circuit resistance	Initial	10mΩ MAX.	5	30	mΩ	2.115	2.57	1.86	0.187	✓
		After test	20mΩ MAX.	5	30	mΩ	2.165	2.78	1.75	0.241	✓
	Terminal retention force	With secondary lock	49N MIN.	2	12	N	82.26	84.2	69.1	4.18	✓
		Without secondary lock	20N MIN.	2	12	N	43.52	49.3	40.8	2.64	✓
	Housing lock strength without terminals		49N MIN.	5	5	N	112.94	114.4	110.8	1.57	✓
Thermal shock	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓
	Connector retention force	Direction 1	100N MIN.	5	5	N	110.88	111.2	110.3	0.36	✓
	Terminal crimp strength		70N MIN.	5	5	N	78.21	80.3	77.1	1.24	✓
	Dry circuit resistance	Initial	10mΩ MAX.	5	30	mΩ	2.943	3.83	1.89	0.832	✓
		After test	20mΩ MAX.	5	30	mΩ	2.874	3.77	2.16	0.412	✓
	Terminal retention force	With secondary lock	49N MIN.	2	12	N	82.54	84.5	81.7	0.84	✓
		Without secondary lock	20N MIN.	2	12	N	44.02	48.8	41.0	2.42	✓
Temperature /humidity cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.			✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.			✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown			✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown			✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓
	Dry circuit resistance	Initial	10mΩ MAX.	5	30	mΩ	1.967	2.46	1.46	0.242	✓
		After test	20mΩ MAX.	5	30	mΩ	2.282	3.31	1.67	0.309	✓
	Terminal retention force	With secondary lock	49N MIN.	2	12	N	85.40	86.2	84.9	0.52	✓
		Without secondary lock	20N MIN.	2	12	N	42.37	44.8	39.2	2.27	✓
Resistance to humidity	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Connector retention force	Direction 1	100N MIN.	5	5	N	116.00	118.9	112.9	2.14	✓
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.			✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.			✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown			✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown			✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓

Table 7. List of results: Properties after endurance tests – II (6P)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Resistance to humidity	Dry circuit resistance	Initial	10mΩ MAX.	5	30	mΩ	1.879	2.16	1.31	0.218	✓	
		After test	20mΩ MAX.	5	30	mΩ	1.969	2.36	1.66	0.163	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	12	N	84.48	85.4	83.4	0.55	✓	
		Without secondary lock	20N MIN.	2	12	N	40.78	41.9	39.7	0.73	✓	
Resistance to abrasion	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Voltage drop	Initial	10mV/A MAX.	5	30	mV/A	1.651	2.19	1.26	0.317	✓	
		After test	20mV/A MAX.	5	30	mV/A	1.628	2.27	1.32	0.224	✓	
Corrosion gas	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Terminal crimp strength		70N MIN.	5	5	N	81.32	84.4	79.9	1.98	✓	
	Voltage drop	Initial	10mV/A MAX.	5	30	mV/A	1.727	2.00	1.45	0.152	✓	
		After test	20mV/A MAX.	5	30	mV/A	2.743	4.10	1.85	0.640	✓	
Resistance to stress corrosion	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal crimp strength		70N MIN.	5	5	N	83.32	84.5	81.9	1.14	✓	
Conden sation	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	30	mΩ	2.236	2.71	1.62	0.314	✓	
		After test	20mΩ MAX.	5	30	mΩ	2.385	3.51	1.79	0.397	✓	
Dump heat cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Insulation resistance	250h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		500h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		750h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		1000h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earm	5	5	-	1,000MΩ MIN.				✓
	Migration		No migration	5	5	-	No migration				✓	
Current cycle	Temperature rise		ΔT=50℃ MAX.	5	5	℃	36.32	39.3	33.1	2.54	✓	
	Voltage drop	Initial	10mV/A MAX.	5	30	mV/A	1.927	2.25	1.54	0.170	✓	
		After test	20mV/A MAX.	5	30	mV/A	2.093	2.81	1.54	0.289	✓	
Shock	Voltage drop	Initial	10mV/A MAX.	5	30	mV/A	1.999	3.12	1.37	0.415	✓	
		After test	20mV/A MAX.	5	30	mV/A	2.046	3.26	1.47	0.412	✓	
	Microcut		1μsMIN 7ΩMAX.	5	5	-	No microcut				✓	
Vibration	Temperature rise		ΔT=50℃ MAX.	5	5	℃	35.90	40.6	32.8	3.52	✓	
	Voltage drop	Initial	10mV/A MAX.	5	30	mV/A	2.141	2.49	1.54	0.193	✓	
		After test	20mV/A MAX.	5	30	mV/A	2.980	5.93	2.12	0.783	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	30	mΩ	2.380	3.20	1.71	0.287	✓	
		After test	20mΩ MAX.	5	30	mΩ	2.516	3.95	1.90	0.450	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	
Vibration with temperature change	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal contact force		3N MIN.	5	5	N	3.410	3.48	3.29	0.095	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	3	18	mΩ	2.067	2.51	1.71	0.197	✓	
		After test	20mΩ MAX.	3	18	mΩ	6.230	14.68	2.70	3.479	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	

Table 8. List of results: Initial properties (8P)

	Measurement		Requirements		Set	n	Unit	Data				Judgement
								Avg	Max	Min	s	
Initial Characteristics	Terminal appearance		No detrimental deformation		5	5	-	No detrimental deformation				✓
	Terminal outer dimension		Satisfy drawing dimension		5	5	-	Satisfies drawing dimension				✓
	Housing appearance		No detrimental deformation		5	5	-	No detrimental deformation				✓
	Housing outer dimension		Satisfy drawing dimension		5	5	-	Satisfies drawing dimension				✓
	Feeling (insertion/removal)		No discomfort		5	5	-	No discomfort				✓
	Connector mating force		35N MAX.		5	5	N	24.72	25.3	24.5	0.33	✓
	Connector unmating force	VT009-01	20N MAX.		5	5	N	16.60	21.1	14.7	2.60	✓
		VT009-02	20N MAX.		5	5	N	17.10	18.0	16.0	0.93	✓
	Connector retention force	Direction 1	90N MIN.		5	5	N	102.51	108.1	99.9	3.32	✓
		Direction 2	90N MIN.		5	5	N	127.10	129.6	123.7	2.17	✓
		Direction 3	90N MIN.		5	5	N	166.69	169.2	160.4	3.55	✓
		Direction 4	90N MIN.		5	5	N	154.39	161.3	147.7	5.59	✓
	Unlocking force		50N MAX.		5	5	N	43.46	45.9	38.2	3.03	✓
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Temperature rise	Single pin	ΔT=50℃ MIN.		5	5	℃	37.71	41.1	33.5	2.87	✓
		All pin	ΔT=50℃ MIN.		5	5	℃	47.58	49.1	45.3	1.57	✓
	Leak current		1mA MAX.		5	5	-	1μA MAX.				✓
	Coplanarity	Terminal	0.1mm MAX.		5	5	mm	0.05mm Max.				✓
		Hold down	0.1mm MAX.		5	5	mm	0.03mm Max.				✓
	Peg strength	Position 1	70N MIN.		5	5	N	176.63	178.9	175.0	1.56	✓
		Position 2	100N MIN.		5	5	N	176.34	179.8	171.9	2.95	✓
		Position 3	100N MIN.		5	5	N	763.38	766.6	753.9	5.40	✓
	Lead strength		30N MIN.		2	16	N	33.95	38.8	32.2	1.79	✓
	Audible click		60dB MIN.		5	5	db	67.20	68.5	65.7	1.06	✓
	Terminal crimp strength		70N MIN.		5	5	N	79.24	80.8	77.9	1.27	✓
	Terminal insertion force		0.5N~3.0N		5	5	N	1.078	1.43	0.92	0.147	✓
												✓
	Terminal removal force		0.5N~3.0N		5	5	N	1.150	1.45	0.91	0.204	✓
												✓
	Terminal contact force		3N MIN.		5	5	N	3.58	3.7	3.3	0.15	✓
	Terminal bend strength	a	Must not bend 1mm or over		5	5	-	0mm (Not bend in the initial position.)				✓
		b	Terminal bending 30°MAX		5	5	-	Terminal bending 10°MAX				✓
	Voltage drop		10mV/A MAX.		5	40	mV/A	3.374	3.71	2.84	0.209	✓
	Dry circuit resistance		10mΩ MAX.		5	40	mΩ	3.076	3.44	2.70	0.200	✓
	Terminal retention force	With secondary lock	49N MIN.		2	16	N	82.08	82.9	80.4	0.64	✓
		Without secondary lock	20N MIN.		2	16	N	46.14	51.0	38.3	2.76	✓
	Terminal to housing insertion force		10N MAX.		2	16	N	2.31	2.7	2.0	0.18	✓
	Retainer insertion/removal force	Insertion force	29.4N MAX.		5	5	N	6.34	6.9	6.0	0.36	✓
		Removal force	5.5N MIN.		5	5	N	13.47	14.0	12.5	0.58	✓
Housing lock strength without terminals		49N MIN.		5	5	N	92.92	94.0	92.1	0.84	✓	
Sn whisker		125μm MAX.		5	5	-	No whisker				✓	

Table 9. List of results: Properties after endurance tests – I (8P)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Repeated insertion/removal	Connector mating force	After 5 repeat	35N MAX.	5	5	N	22.88	24.4	21.7	1.10	✓	
		After test	35N MAX.	5	5	N	19.97	21.1	18.8	0.80	✓	
	Connector unmating force	After 5 repeat	20N MAX.	5	5	N	10.83	11.4	9.7	0.67	✓	
		After test	20N MAX.	5	5	N	15.75	17.0	14.4	0.98	✓	
	Voltage drop	Initial	10mV/A MAX.	5	40	mV/A	2.929	3.42	2.57	0.358	✓	
		After test	20mV/A MAX.	5	40	mV/A	4.331	5.14	3.66	0.536	✓	
Resistance to forcedmating	Connector mating force		35N MAX.	5	5	N	14.30	15.0	13.5	0.67	✓	
	Connector unmating force		20N MAX.	5	5	N	16.27	17.2	15.1	0.84	✓	
	Voltage drop	Initial	10mV/A MAX.	5	40	mV/A	2.633	3.05	2.19	0.370	✓	
		After test	20mV/A MAX.	5	40	mV/A	3.032	3.36	2.50	0.332	✓	
Fretting corrosion	Dry circuit resistance	Monitor dry circuit resistance during test.	20mΩMAX.	5	5	mΩ	See Graph 1 on Sheet 25				✓	
Thermal a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	108.88	109.6	108.3	0.50	✓	
	Terminal crimp strength		70N MIN.	5	5	N	78.60	80.8	77.3	1.44	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	40	mΩ	2.422	2.77	2.05	0.256	✓	
		After test	20mΩ MAX.	5	40	mΩ	3.554	4.39	2.70	0.608	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	16	N	79.80	81.1	76.2	2.05	✓	
		Without secondary lock	20N MIN.	2	16	N	45.32	47.7	43.2	2.03	✓	
	Housing lock strength without terminals		49N MIN.	5	5	N	106.20	109.7	104.2	2.34	✓	
Low temperature a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	40	mΩ	3.101	3.42	2.60	0.305	✓	
		After test	20mΩ MAX.	5	40	mΩ	3.216	3.79	2.62	0.470	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	16	N	79.93	83.1	76.8	2.34	✓	
		Without secondary lock	20N MIN.	2	16	N	46.24	49.7	44.5	2.29	✓	
Housing lock strength without terminals		49N MIN.	5	5	N	97.46	98.8	96.7	0.80	✓		
Thermal shock	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	104.39	108.5	98.1	4.32	✓	
	Terminal crimp strength		70N MIN.	5	5	N	77.27	79.2	75.5	1.48	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	40	mΩ	2.799	3.21	2.38	0.385	✓	
		After test	20mΩ MAX.	5	40	mΩ	3.708	4.50	3.27	0.471	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	16	N	81.47	83.9	79.8	1.55	✓	
		Without secondary lock	20N MIN.	2	16	N	44.25	46.8	42.1	2.35	✓	
	Housing lock strength without terminals		49N MIN.	5	5	N	97.46	98.8	96.7	0.80	✓	
Temperature /humidity cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	40	mΩ	2.654	3.14	2.38	0.315	✓	
		After test	20mΩ MAX.	5	40	mΩ	4.024	4.68	2.88	0.732	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	16	N	82.45	83.4	81.3	0.94	✓	
		Without secondary lock	20N MIN.	2	16	N	44.45	48.7	41.9	2.75	✓	
Resistance to humidity	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	106.80	107.9	105.1	1.11	✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	

Table 10. List of results: Properties after endurance tests – II (8P)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Resistance to humidity	Dry circuit resistance	Initial	10mΩ MAX.	5	40	mΩ	2.497	2.76	2.12	0.255	✓	
		After test	20mΩ MAX.	5	40	mΩ	3.448	3.83	2.85	0.380	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	16	N	81.15	85.1	78.8	2.46	✓	
		Without secondary lock	20N MIN.	2	16	N	42.74	44.6	40.5	1.47	✓	
Resistance to abrasion	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Voltage drop	Initial	10mV/A MAX.	5	40	mV/A	3.113	3.37	2.82	0.221	✓	
		After test	20mV/A MAX.	5	40	mV/A	3.016	3.37	2.66	0.347	✓	
Corrosion gas	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Terminal crimp strength		70N MIN.	5	5	N	78.59	81.4	76.8	1.97	✓	
	Voltage drop	Initial	10mV/A MAX.	5	40	mV/A	2.442	3.02	2.22	0.330	✓	
After test		20mV/A MAX.	5	40	mV/A	3.477	3.96	2.46	0.589	✓		
Resistance to stress corrosion	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal crimp strength		70N MIN.	5	5	N	79.55	81.7	78.5	1.24	✓	
Conden sation	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	40	mΩ	2.661	2.96	2.25	0.280	✓	
		After test	20mΩ MAX.	5	40	mΩ	3.362	3.70	2.65	0.420	✓	
Dump heat cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Insulation resistance	250h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		500h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		750h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		1000h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Migration		No migration	5	5	-	No migration				✓	
Current cycle	Temperature rise		ΔT=50℃ MAX.	5	5	℃	42.47	44.5	40.6	1.38	✓	
	Voltage drop	Initial	10mV/A MAX.	5	40	mV/A	2.817	3.08	2.30	0.306	✓	
		After test	20mV/A MAX.	5	40	mV/A	3.316	3.67	3.11	0.214	✓	
Shock	Voltage drop	Initial	10mV/A MAX.	5	40	mV/A	2.739	3.17	1.78	0.552	✓	
		After test	20mV/A MAX.	5	40	mV/A	2.757	3.06	2.55	0.203	✓	
	Microcut		1μsMIN.7ΩMAX.	5	5	-	No microcut				✓	
Vibration	Temperature rise		ΔT=50℃ MAX.	5	5	℃	39.68	41.6	35.8	2.28	✓	
	Voltage drop	Initial	10mV/A MAX.	5	40	mV/A	2.385	2.65	2.01	0.231	✓	
		After test	20mV/A MAX.	5	40	mV/A	2.873	3.47	2.06	0.546	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	40	mΩ	3.062	3.44	2.47	0.383	✓	
		After test	20mΩ MAX.	5	40	mΩ	3.880	4.43	3.05	0.641	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	
Vibration with temperature change	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal contact force		3N MIN.	5	5	N	3.462	3.55	3.33	0.101	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	40	mΩ	2.745	3.01	2.41	0.294	✓	
		After test	20mΩ MAX.	5	40	mΩ	8.312	13.05	3.29	3.480	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	

Table 11. List of results: Initial properties (12P Normal Lock)

	Measurement		Requirements		Set	n	Unit	Data				Judgement
								Avg	Max	Min	s	
Initial Characteristics	Terminal appearance		No detrimental deformation		5	5	-	No detrimental deformation				✓
	Terminal outer dimension		Satisfy drawing dimension		5	5	-	Satisfies drawing dimension				✓
	Housing appearance		No detrimental deformation		5	5	-	No detrimental deformation				✓
	Housing outer dimension		Satisfy drawing dimension		5	5	-	Satisfies drawing dimension				✓
	Feeling (insertion/removal)		No discomfort		5	5	-	No discomfort				✓
	Connector mating force	VT009-01	58N MAX.		5	5	N	40.08	41.9	38.2	1.33	✓
		VT009-02	58N MAX.		5	5	N	42.80	44.4	41.6	1.21	✓
	Connector unmating force	VT009-01	48N MAX.		5	5	N	41.88	42.7	40.7	0.78	✓
		VT009-02	48N MAX.		5	5	N	37.40	38.7	36.3	1.12	✓
	Connector retention force	Direction 1	90N MIN.		5	5	N	137.90	141.3	135.3	2.16	✓
		Direction 2	90N MIN.		5	5	N	208.80	222.2	200.7	8.70	✓
		Direction 3	90N MIN.		5	5	N	182.48	189.6	171.0	7.44	✓
		Direction 4	90N MIN.		5	5	N	289.36	335.0	260.1	29.03	✓
	Unlocking force		50N MAX.		5	5	N	20.34	21.4	19.0	0.93	✓
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Temperature rise	Single pin	ΔT=50℃ MIN.		5	5	℃	40.22	41.2	38.5	1.31	✓
		All pin	ΔT=50℃ MIN.		5	5	℃	46.34	49.0	43.7	2.58	✓
	Leak current		1mA MAX.		5	5	-	1μA MAX.				✓
	Coplanarity	Terminal	0.1mm MAX.		5	5	mm	0.04mm Max.				✓
		Hold down	0.1mm MAX.		5	5	mm	0.05mm Max.				✓
	Peg strength	Position 1	70N MIN.		5	5	N	156.01	161.2	151.4	4.47	✓
		Position 2	100N MIN.		5	5	N	187.65	192.1	181.5	4.75	✓
		Position 3	100N MIN.		5	5	N	785.72	809.8	756.3	19.35	✓
	Lead strength		30N MIN.		4	48	N	37.71	41.1	35.5	1.78	✓
	Audible click		60dB MIN.		5	5	db	69.28	72.1	67.1	2.45	✓
	Terminal crimp strength		70N MIN.		5	5	N	79.24	80.8	77.9	1.27	✓
	Terminal insertion force		0.5N~3.0N		5	5	N	1.780	1.96	1.52	0.147	✓
	Terminal removal force		0.5N~3.0N		5	5	N	1.915	2.26	1.44	0.255	✓
	Terminal contact force		3N MIN.		5	5	N	3.58	3.73	3.33	0.15	✓
	Terminal bend strength	a	Must not bend 1mm or over		5	5	-	0mm (Not bend in the initial position.)				✓
		b	Terminal bending 30°MAX		5	5	-	Terminal bending 10°MAX				✓
	Voltage drop		10mV/A MAX.		5	60	mV/A	2.421	4.03	1.16	0.470	✓
	Dry circuit resistance		10mΩ MAX.		5	60	mΩ	1.600	2.37	1.07	0.348	✓
Terminal retention force	With secondary lock	49N MIN.		2	24	N	84.43	85.2	82.8	0.63	✓	
	Without secondary lock	20N MIN.		2	24	N	40.47	44.8	37.0	2.05	✓	
Terminal to housing insertion force		10N MAX.		2	24	N	2.63	3.1	2.3	0.28	✓	
Retainer insertion/removal force	Insertion force	29.4N MAX.		5	5	N	12.90	14.0	10.5	1.38	✓	
	Removal force	5.5N MIN.		5	5	N	13.81	15.7	12.4	1.28	✓	
Housing lock strength without terminals		49N MIN.		5	5	N	107.32	108.4	106.3	1.02	✓	
Sn whisker		125μm MAX.		5	5	-	No whisker				✓	

Table 12. List of results: Properties after endurance tests – I (12P Normal Lock)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Repeated insertion/removal	Connector mating force	After 5 repeat	58N MAX.	5	5	N	33.87	34.6	31.9	1.09	✓	
		After test	58N MAX.	5	5	N	35.38	36.5	34.1	0.92	✓	
	Connector unmating force	After 5 repeat	48N MAX.	5	5	N	35.60	37.2	32.4	1.95	✓	
		After test	48N MAX.	5	5	N	28.08	29.1	26.0	1.24	✓	
	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	2.442	2.96	1.87	0.317	✓	
		After test	20mV/A MAX.	5	60	mV/A	2.675	4.71	1.89	0.541	✓	
Resistance to forced mating	Connector mating force		58N MAX.	5	5	N	30.10	33.7	28.7	2.10	✓	
	Connector unmating force		48N MAX.	5	5	N	30.62	31.9	28.5	1.57	✓	
	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	1.604	2.76	1.10	0.365	✓	
		After test	20mV/A MAX.	5	60	mV/A	1.730	3.34	1.21	0.415	✓	
Fretting corrosion	Dry circuit resistance	Monitor dry circuit resistance during test.	20mΩMAX.	5	5	mΩ	See Graph 1 on Sheet 25				✓	
Thermal a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	130.23	131.7	128.3	1.37	✓	
	Terminal crimp strength		70N MIN.	5	5	N	79.41	81.5	78.0	1.29	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	60	mΩ	2.491	2.89	2.15	0.198	✓	
		After test	20mΩ MAX.	5	60	mΩ	3.263	6.35	1.95	0.817	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	24	N	81.46	83.8	75.0	2.30	✓	
		Without secondary lock	20N MIN.	2	24	N	42.18	46.1	39.4	2.08	✓	
	Housing lock strength without terminals		49N MIN.	5	5	N	114.24	116.1	113.5	1.07	✓	
Low temperature a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	60	mΩ	2.363	3.07	1.78	0.305	✓	
		After test	20mΩ MAX.	5	60	mΩ	2.364	3.43	1.51	0.470	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	24	N	83.42	84.4	79.2	1.44	✓	
		Without secondary lock	20N MIN.	2	24	N	43.85	49.4	40.1	3.06	✓	
	Housing lock strength without terminals		49N MIN.	5	5	N	115.18	117.0	112.8	1.81	✓	
Thermal shock	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	125.34	128.1	123.7	1.69	✓	
	Terminal crimp strength		70N MIN.	5	5	N	77.81	79.8	75.0	1.40	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	60	mΩ	2.777	3.70	1.84	0.745	✓	
		After test	20mΩ MAX.	5	60	mΩ	3.033	4.27	2.05	0.534	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	24	N	82.21	84.1	79.7	1.08	✓	
		Without secondary lock	20N MIN.	2	24	N	43.11	48.4	40.4	2.60	✓	
	Temperature /humidity cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓		
Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓	
			(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓	
Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓	
			(b) Between terminal and earth	5	5	-	No insulation breakdown				✓	
Leak current		1mA MAX.	5	5	-	1μA MAX.				✓		
Dry circuit resistance		Initial	10mΩ MAX.	5	60	mΩ	2.230	2.61	1.69	0.206	✓	
		After test	20mΩ MAX.	5	60	mΩ	2.375	2.99	1.70	0.324	✓	
Terminal retention force		With secondary lock	49N MIN.	2	24	N	85.30	86.1	83.6	0.66	✓	
		Without secondary lock	20N MIN.	2	24	N	41.92	44.8	40.4	1.27	✓	
Resistance to humidity	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	133.18	140.8	126.0	5.92	✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	

Table 13. List of results: Properties after endurance tests – II (12P Normal Lock)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Resistance to humidity	Dry circuit resistance	Initial	10mΩ MAX.	5	60	mΩ	2.113	2.73	1.17	0.367	✓	
		After test	20mΩ MAX.	5	60	mΩ	2.207	3.11	1.54	0.343	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	24	N	83.16	84.6	78.1	2.22	✓	
		Without secondary lock	20N MIN.	2	24	N	41.02	42.3	39.9	0.83	✓	
Resistance to abrasion	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	1.335	2.01	1.10	0.210	✓	
		After test	20mV/A MAX.	5	60	mV/A	1.607	2.16	1.25	0.218	✓	
Corrosion gas	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Terminal crimp strength		70N MIN.	5	5	N	81.56	83.7	76.2	2.25	✓	
	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	2.625	3.66	1.75	0.497	✓	
		After test	20mV/A MAX.	5	60	mV/A	4.195	7.29	2.18	1.415	✓	
Resistance to stress corrosion	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal crimp strength		70N MIN.	5	5	N	83.51	84.5	82.1	0.94	✓	
Condensation	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	60	mΩ	2.485	3.13	1.86	0.320	✓	
		After test	20mΩ MAX.	5	60	mΩ	2.710	4.81	1.13	0.946	✓	
Dump heat cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Insulation resistance	250h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		500h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		750h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		1000h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Migration		No migration	5	5	-	No migration				✓	
Current cycle	Temperature rise		ΔT=50℃ MAX.	5	5	℃	45.34	46.0	43.7	1.58	✓	
	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	2.173	2.54	1.74	0.174	✓	
		After test	20mV/A MAX.	5	60	mV/A	2.230	3.04	1.71	0.257	✓	
Shock	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	1.827	2.42	1.14	0.331	✓	
		After test	20mV/A MAX.	5	60	mV/A	1.982	2.66	1.12	0.335	✓	
	Microcut		1μsMIN 7ΩMAX.	5	5	-	No microcut				✓	
Vibration	Temperature rise		ΔT=50℃ MAX.	5	5	℃	36.64	37.6	35.3	0.92	✓	
	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	2.148	2.61	1.53	0.273	✓	
		After test	20mV/A MAX.	5	60	mV/A	2.731	3.73	1.85	0.361	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	60	mΩ	2.047	2.85	1.24	0.377	✓	
		After test	20mΩ MAX.	5	60	mΩ	2.416	3.14	1.65	0.292	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	
Vibration with temperature change	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal contact force		3N MIN.	5	5	N	3.388	3.48	3.26	0.083	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	3	36	mΩ	2.400	3.05	1.91	0.330	✓	
		After test	20mΩ MAX.	3	36	mΩ	6.837	14.78	2.13	4.330	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	

Table 14. List of results: Initial properties (12P Inertia Lock)

	Measurement		Requirements		Set	n	Unit	Data				Judgement
								Avg	Max	Min	s	
Initial Characteristics	Terminal appearance		No detrimental deformation		5	5	-	No detrimental deformation				✓
	Terminal outer dimension		Satisfy drawing dimension		5	5	-	Satisfies drawing dimension				✓
	Housing appearance		No detrimental deformation		5	5	-	No detrimental deformation				✓
	Housing outer dimension		Satisfy drawing dimension		5	5	-	Satisfies drawing dimension				✓
	Feeling (insertion/removal)		No discomfort		5	5	-	No discomfort				✓
	Connector mating force		45N MAX.		5	5	N	32.78	33.2	32.1	0.44	✓
	Connector unmating force	VT009-01	30N MAX.		5	5	N	22.38	22.9	21.8	0.43	✓
		VT009-02	30N MAX.		5	5	N	22.40	23.2	21.9	0.60	✓
	Connector retention force	Direction 1	90N MIN.		5	5	N	125.58	126.0	124.7	0.53	✓
		Direction 2	90N MIN.		5	5	N	138.16	142.0	134.0	3.10	✓
		Direction 3	90N MIN.		5	5	N	195.58	202.8	192.1	4.31	✓
		Direction 4	90N MIN.		5	5	N	192.52	195.9	189.2	2.61	✓
	Unlocking force		50N MAX.		5	5	N	25.98	26.6	24.7	0.80	✓
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Temperature rise	Single pin	ΔT=50℃ MIN.		5	5	℃	30.66	32.2	29.0	1.19	✓
		All pin	ΔT=50℃ MIN.		5	5	℃	43.08	45.3	40.6	2.10	✓
	Leak current		1mA MAX.		5	5	-	1μA MAX.				✓
	Coplanarity	Terminal	0.1mm MAX.		5	5	mm	0.06mm Max.				✓
		Hold down	0.1mm MAX.		5	5	mm	0.04mm Max.				✓
	Peg strength	Position 1	70N MIN.		5	5	N	158.94	179.4	152.9	11.46	✓
		Position 2	100N MIN.		5	5	N	193.24	199.4	183.2	7.66	✓
		Position 3	100N MIN.		5	5	N	830.62	855.8	799.9	21.57	✓
	Lead strength		30N MIN.		2	24	N	38.98	44.0	36.9	2.11	✓
	Audible click		60dB MIN.		5	5	db	61.20	62.0	60.0	0.39	✓
	Terminal crimp strength		70N MIN.		5	5	N	79.24	80.8	77.9	1.27	✓
	Terminal insertion force		0.5N~3.0N		5	5	N	1.078	1.43	0.92	0.147	✓ ✓
	Terminal removal force		0.5N~3.0N		5	5	N	1.150	1.45	0.91	0.204	✓ ✓
	Terminal contact force		3N MIN.		5	5	N	3.58	3.7	3.3	0.15	✓
	Terminal bend strength	a	Must not bend 1mm or over		5	5	-	0mm (Not bend in the initial position.)				✓
		b	Terminal bending 30°MAX		5	5	-	Terminal bending 10°MAX				✓
	Voltage drop		10mV/A MAX.		5	60	mV/A	2.383	3.19	2.59	0.151	✓
	Dry circuit resistance		10mΩ MAX.		5	60	mΩ	2.973	3.94	2.59	0.270	✓
	Terminal retention force	With secondary lock	49N MIN.		2	24	N	83.76	85.1	82.7	0.83	✓
		Without secondary lock	20N MIN.		2	24	N	44.56	50.8	40.1	2.50	✓
	Terminal to housing insertion force		10N MAX.		2	24	N	2.36	2.7	2.0	0.22	✓
	Retainer insertion/removal force	Insertion force	29.4N MAX.		5	5	N	6.74	7.3	6.1	0.51	✓
		Removal force	5.5N MIN.		5	5	N	12.82	13.7	11.8	0.79	✓
	Housing lock strength without terminals		49N MIN.		5	5	N	119.22	120.1	118.2	0.86	✓
	Sn whisker		125μm MAX.		5	5	-	No whisker				✓

Table 15. List of results: Properties after endurance tests – I (12P Inertia lock)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Repeated insertion/removal	Connector mating force	After 5 repeat	45N MAX.	5	5	N	28.14	29.8	26.9	1.27	✓	
		After test	45N MAX.	5	5	N	34.29	35.9	33.6	0.94	✓	
	Connector unmating force	After 5 repeat	30N MAX.	5	5	N	18.37	19.4	17.2	0.98	✓	
		After test	30N MAX.	5	5	N	19.56	20.3	18.8	0.63	✓	
	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	2.511	3.96	1.00	0.728	✓	
		After test	20mV/A MAX.	5	60	mV/A	2.713	3.71	1.98	0.443	✓	
Resistance to forcedmating	Connector mating force		45N MAX.	5	5	N	27.73	28.8	26.6	1.03	✓	
	Connector unmating force		30N MAX.	5	5	N	18.82	20.1	17.1	1.09	✓	
	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	1.617	2.50	0.81	0.301	✓	
		After test	20mV/A MAX.	5	60	mV/A	1.725	2.61	0.82	0.366	✓	
Fretting corrosion	Dry circuit resistance	Monitor dry circuit resistance during test.	20mΩMAX.	5	5	mΩ	See Graph 1 on Sheet 25				✓	
Thermal a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	134.30	134.7	133.9	0.33	✓	
	Terminal crimp strength		70N MIN.	5	5	N	77.50	79.2	75.3	1.45	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	60	mΩ	2.519	2.91	2.13	0.188	✓	
		After test	20mΩ MAX.	5	60	mΩ	3.170	4.96	1.60	0.766	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	24	N	82.11	86.8	78.0	2.01	✓	
		Without secondary lock	20N MIN.	2	24	N	41.82	45.5	38.5	1.56	✓	
	Housing lock strength without terminals		49N MIN.	5	5	N	114.49	115.0	113.4	0.72	✓	
Low temperature a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	60	mΩ	2.266	2.99	1.52	0.279	✓	
		After test	20mΩ MAX.	5	60	mΩ	2.405	3.25	1.58	0.429	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	24	N	83.53	86.2	81.1	1.49	✓	
		Without secondary lock	20N MIN.	2	24	N	43.85	48.3	38.2	2.80	✓	
	Housing lock strength without terminals		49N MIN.	5	5	N	114.67	116.1	112.4	1.77	✓	
Thermal shock	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	128.69	130.8	126.5	1.78	✓	
	Terminal crimp strength		70N MIN.	5	5	N	78.70	81.0	77.3	1.48	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	60	mΩ	2.772	4.16	1.77	0.593	✓	
		After test	20mΩ MAX.	5	60	mΩ	2.971	4.27	1.68	0.560	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	24	N	82.40	84.1	80.9	0.87	✓	
		Without secondary lock	20N MIN.	2	24	N	43.32	46.9	38.6	2.31	✓	
	Temperature /humidity cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓		
Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓	
			(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓	
Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓	
			(b) Between terminal and earth	5	5	-	No insulation breakdown				✓	
Leak current		1mA MAX.	5	5	-	1μA MAX.				✓		
Dry circuit resistance		Initial	10mΩ MAX.	5	60	mΩ	2.248	2.64	1.88	0.177	✓	
		After test	20mΩ MAX.	5	60	mΩ	2.342	2.86	1.86	0.278	✓	
Terminal retention force		With secondary lock	49N MIN.	2	24	N	85.19	86.4	84.0	0.59	✓	
		Without secondary lock	20N MIN.	2	24	N	42.07	44.0	39.7	1.13	✓	
Resistance to humidity	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	134.15	139.7	128.0	4.69	✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	

Table 16. List of results: Properties after endurance tests – II (12P Inertia lock)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Resistance to humidity	Dry circuit resistance	Initial	10mΩ MAX.	5	60	mΩ	2.078	2.85	1.12	0.350	✓	
		After test	20mΩ MAX.	5	60	mΩ	2.169	2.90	1.54	0.300	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	24	N	83.25	87.4	80.3	1.90	✓	
		Without secondary lock	20N MIN.	2	24	N	41.05	42.3	39.4	0.77	✓	
Resistance to abrasion	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	1.334	1.80	0.88	0.190	✓	
		After test	20mV/A MAX.	5	60	mV/A	1.560	2.04	0.93	0.225	✓	
Corrosion gas	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Terminal crimp strength		70N MIN.	5	5	N	82.52	85.3	80.1	2.08	✓	
	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	2.612	3.62	1.91	0.391	✓	
		After test	20mV/A MAX.	5	60	mV/A	4.383	7.22	1.40	1.299	✓	
Resistance to stress corrosion	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal crimp strength		70N MIN.	5	5	N	82.98	84.3	82.1	1.03	✓	
Condensation	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	60	mΩ	2.473	3.08	1.87	0.275	✓	
		After test	20mΩ MAX.	5	60	mΩ	2.847	4.88	0.90	0.879	✓	
Dump heat cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Insulation resistance	250h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		500h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		750h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		1000h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Migration		No migration	5	5	-	No migration				✓	
Current cycle	Temperature rise		ΔT=50℃ MAX.	5	5	℃	45.65	46.5	43.5	1.25	✓	
	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	2.170	2.58	1.86	0.160	✓	
		After test	20mV/A MAX.	5	60	mV/A	2.179	2.67	1.76	0.206	✓	
Shock	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	1.793	2.36	1.14	0.285	✓	
		After test	20mV/A MAX.	5	60	mV/A	1.980	2.80	0.88	0.371	✓	
	Microcut		1μsMIN 7ΩMAX.	5	5	-	No microcut				✓	
Vibration	Temperature rise		ΔT=50℃ MAX.	5	5	℃	36.62	37.5	34.7	1.13	✓	
	Voltage drop	Initial	10mV/A MAX.	5	60	mV/A	2.193	2.76	1.79	0.238	✓	
		After test	20mV/A MAX.	5	60	mV/A	2.733	3.79	1.94	0.406	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	60	mΩ	2.138	3.20	1.09	0.459	✓	
		After test	20mΩ MAX.	5	60	mΩ	2.412	3.06	1.70	0.278	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	
	Vibration with temperature change	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓		
Terminal contact force		3N MIN.	5	5	N	3.432	3.57	3.30	0.128	✓		
Dry circuit resistance		Initial	10mΩ MAX.	3	36	mΩ	2.384	2.99	1.92	0.279	✓	
		After test	20mΩ MAX.	3	36	mΩ	7.716	11.32	2.63	2.015	✓	
Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓		

Table 17. List of results: Initial properties (16P)

	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Initial Characteristics	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal outer dimension		Satisfy drawing dimension	5	5	-	Satisfies drawing dimension				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing outer dimension		Satisfy drawing dimension	5	5	-	Satisfies drawing dimension				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Connector mating force		55N MAX.	5	5	N	39.27	41.1	37.5	1.40	✓	
	Connector unmating force	VT009-01	40N MAX.	5	5	N	28.82	30.8	26.0	1.74	✓	
		VT009-02	40N MAX.	5	5	N	30.88	32.2	29.9	0.85	✓	
	Connector retention force	Direction 1	90N MIN.	5	5	N	147.54	148.7	146.1	1.14	✓	
		Direction 2	90N MIN.	5	5	N	191.55	205.0	184.3	8.89	✓	
		Direction 3	90N MIN.	5	5	N	197.51	205.5	191.3	5.68	✓	
		Direction 4	90N MIN.	5	5	N	221.21	230.5	216.2	5.65	✓	
	Unlocking force		50N MAX.	5	5	N	25.18	25.9	24.5	0.56	✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Temperature rise	Single pin	ΔT=50℃ MIN.		5	5	℃	27.96	29.9	24.5	2.39	✓
		All pin	ΔT=50℃ MIN.		5	5	℃	40.22	43.1	38.5	1.84	✓
	Leak current		1mA MAX.		5	5	-	1μA MAX.				✓
	Coplanarity	Terminal	0.1mm MAX.		5	5	mm	0.06mm Max.				✓
		Hold down	0.1mm MAX.		5	5	mm	0.01mm Max.				✓
	Peg strength	Position 1	70N MIN.		5	5	N	148.53	161.7	134.3	9.68	✓
		Position 2	100N MIN.		5	5	N	211.13	228.0	202.9	10.40	✓
		Position 3	100N MIN.		5	5	N	810.14	874.8	759.9	41.91	✓
	Lead strength		30N MIN.		4	64	N	42.39	48.7	38.9	3.08	✓
	Audible click		60dB MIN.		5	5	db	78.10	80.2	76.1	1.59	✓
	Terminal crimp strength		70N MIN.		5	5	N	79.24	80.8	77.9	1.27	✓
	Terminal insertion force		0.5N~3.0N		5	5	N	1.078	1.43	0.92	0.147	✓
	Terminal removal force		0.5N~3.0N		5	5	N	1.150	1.45	0.91	0.204	✓
	Terminal contact force		3N MIN.		5	5	N	3.58	3.73	3.33	0.15	✓
	Terminal bend strength	a	Must not bend 1mm or over		5	5	-	0mm (Not bend in the initial position.)				✓
		b	Terminal bending 30°MAX		5	5	-	Terminal bending 10°MAX				✓
	Voltage drop		10mV/A MAX.		5	80	mV/A	2.340	2.52	1.91	0.158	✓
	Dry circuit resistance		10mΩ MAX.		5	80	mΩ	2.311	2.71	1.79	0.272	✓
	Terminal retention force	With secondary lock	49N MIN.		2	32	N	84.76	85.5	82.9	0.65	✓
		Without secondary lock	20N MIN.		2	32	N	39.10	42.7	36.4	1.56	✓
	Terminal to housing insertion force		10N MAX.		2	32	N	1.93	2.2	1.6	0.20	✓
	Retainer insertion/removal force	Insertion force	29.4N MAX.		5	5	N	6.93	8.0	6.0	0.86	✓
		Removal force	5.5N MIN.		5	5	N	8.61	9.9	7.2	0.99	✓
	Housing lock strength without terminals		49N MIN.		5	5	N	129.96	132.1	127.3	2.00	✓
	Sn whisker		125μm MAX.		5	5	-	No whisker				✓

Table 18. List of results: Properties after endurance tests – I (16P)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Repeated insertion/removal	Connector mating force	After 5 repeat	55N MAX.	5	5	N	32.85	35.3	30.3	1.78	✓	
		After test	55N MAX.	5	5	N	33.35	35.9	31.8	1.81	✓	
	Connector unmating force	After 5 repeat	40N MAX.	5	5	N	32.95	36.8	29.4	1.95	✓	
		After test	40N MAX.	5	5	N	32.74	35.8	37.1	3.56	✓	
	Voltage drop	Initial	10mV/A MAX.	5	80	mV/A	3.202	4.19	2.48	0.443	✓	
		After test	20mV/A MAX.	5	80	mV/A	3.389	7.07	2.83	0.648	✓	
Resistance to forcedmating	Connector mating force		55N MAX.	5	5	N	34.18	35.3	32.8	0.98	✓	
	Connector unmating force		40N MAX.	5	5	N	32.10	33.8	30.9	1.21	✓	
	Voltage drop	Initial	10mV/A MAX.	5	80	mV/A	2.656	3.22	2.24	0.252	✓	
		After test	20mV/A MAX.	5	80	mV/A	3.214	4.44	2.78	0.352	✓	
Fretting corrosion	Dry circuit resistance	Monitor dry circuit resistance during test.	20mΩMAX.	5	5	mΩ	See Graph 1 on Sheet 25				✓	
Thermal a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	143.92	144.8	142.1	1.05	✓	
	Terminal crimp strength		70N MIN.	5	5	N	78.80	80.2	77.3	1.32	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	80	mΩ	2.617	3.02	2.33	0.157	✓	
		After test	20mΩ MAX.	5	80	mΩ	3.205	5.63	2.43	0.462	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	32	N	79.54	83.2	74.4	2.37	✓	
		Without secondary lock	20N MIN.	2	32	N	41.97	45.3	40.2	1.15	✓	
	Housing lock strength without terminals		49N MIN.	5	5	N	132.96	134.1	131.6	1.09	✓	
Low temperature a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	80	mΩ	2.616	3.87	2.14	0.465	✓	
		After test	20mΩ MAX.	5	80	mΩ	2.556	3.96	2.06	0.328	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	32	N	83.17	84.1	79.3	1.14	✓	
		Without secondary lock	20N MIN.	2	32	N	38.62	41.6	37.6	1.08	✓	
	Housing lock strength without terminals		49N MIN.	5	5	N	127.33	130.8	125.2	2.08	✓	
Thermal shock	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	145.09	146.1	143.5	1.07	✓	
	Terminal crimp strength		70N MIN.	5	5	N	75.69	78.0	73.2	1.71	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	80	mΩ	2.798	3.77	2.40	0.238	✓	
		After test	20mΩ MAX.	5	80	mΩ	3.385	4.88	2.74	0.438	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	32	N	81.85	84.0	71.5	2.56	✓	
		Without secondary lock	20N MIN.	2	32	N	41.76	46.4	39.3	1.61	✓	
	Temperature /humidity cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓		
Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓	
			(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓	
Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓	
			(b) Between terminal and earth	5	5	-	No insulation breakdown				✓	
Leak current		1mA MAX.	5	5	-	1μA MAX.				✓		
Dry circuit resistance		Initial	10mΩ MAX.	5	80	mΩ	2.616	4.24	2.29	0.236	✓	
		After test	20mΩ MAX.	5	80	mΩ	3.315	5.70	2.75	0.447	✓	
Terminal retention force		With secondary lock	49N MIN.	2	32	N	83.80	85.6	79.7	1.43	✓	
		Without secondary lock	20N MIN.	2	32	N	41.51	43.1	40.0	0.86	✓	
Resistance to humidity	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	145.38	146.2	144.4	0.76	✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	

Table 19. List of results: Properties after endurance tests – II (16P)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Resistance to humidity	Dry circuit resistance	Initial	10mΩ MAX.	5	80	mΩ	2.501	2.98	2.27	0.129	✓	
		After test	20mΩ MAX.	5	80	mΩ	2.512	3.92	2.04	0.243	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	32	N	82.23	85.0	75.1	2.44	✓	
		Without secondary lock	20N MIN.	2	32	N	42.03	43.8	40.5	0.84	✓	
Resistance to abrasion	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Voltage drop	Initial	10mV/A MAX.	5	80	mV/A	2.898	4.20	2.57	0.248	✓	
		After test	20mV/A MAX.	5	80	mV/A	2.906	5.10	2.50	0.318	✓	
Corrosion gas	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Terminal crimp strength		70N MIN.	5	5	N	79.88	81.5	77.7	1.18	✓	
	Voltage drop	Initial	10mV/A MAX.	5	80	mV/A	3.188	3.53	2.86	0.114	✓	
		After test	20mV/A MAX.	5	80	mV/A	3.455	6.16	2.94	0.480	✓	
Resistance to stress corrosion	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal crimp strength		70N MIN.	5	5	N	80.39	82.8	75.5	2.36	✓	
Condensation	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	80	mΩ	2.511	2.73	2.32	0.087	✓	
		After test	20mΩ MAX.	5	80	mΩ	2.816	3.28	2.55	0.156	✓	
Dump heat cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Insulation resistance	250h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		500h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		750h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		1000h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Migration		No migration	5	5	-	No migration				✓	
Current cycle	Temperature rise		ΔT=50℃ MAX.	5	5	℃	43.88	46.1	42.8	1.34	✓	
	Voltage drop	Initial	10mV/A MAX.	5	80	mV/A	1.985	2.43	1.74	0.120	✓	
		After test	20mV/A MAX.	5	80	mV/A	2.980	3.77	2.38	0.307	✓	
Shock	Voltage drop	Initial	10mV/A MAX.	5	80	mV/A	2.711	3.49	2.27	0.213	✓	
		After test	20mV/A MAX.	5	80	mV/A	3.143	3.89	2.69	0.211	✓	
	Microcut		1μsMIN 7ΩMAX.	5	5	-	No microcut				✓	
Vibration	Temperature rise		ΔT=50℃ MAX.	5	5	℃	33.92	35.4	32.2	1.03	✓	
	Voltage drop	Initial	10mV/A MAX.	5	80	mV/A	2.054	2.33	1.82	0.106	✓	
		After test	20mV/A MAX.	5	80	mV/A	3.829	6.36	2.58	0.870	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	80	mΩ	1.952	2.28	1.72	0.102	✓	
		After test	20mΩ MAX.	5	80	mΩ	3.284	4.99	2.27	0.659	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	
Vibration with temperature change	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal contact force		3N MIN.	5	5	N	3.286	3.48	3.03	0.120	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	3	48	mΩ	2.527	3.06	2.26	0.150	✓	
		After test	20mΩ MAX.	3	48	mΩ	6.302	14.81	2.37	2.858	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	

Table 20. List of results: Initial properties (20P)

	Measurement		Requirements	Set	n	Unit	Data				Judgement
							Avg	Max	Min	s	
Initial Characteristics	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Terminal outer dimension		Satisfy drawing dimension	5	5	-	Satisfies drawing dimension				✓
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Housing outer dimension		Satisfy drawing dimension	5	5	-	Satisfies drawing dimension				✓
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓
	Connector mating force		65N MAX.	5	5	N	47.73	49.0	45.7	1.12	✓
	Connector unmating force	VT009-01	50N MAX.	5	5	N	37.88	40.3	36.9	1.39	✓
		VT009-02	50N MAX.	5	5	N	39.64	41.0	38.1	1.06	✓
	Connector retention force	Direction 1	90N MIN.	5	5	N	160.27	161.5	157.5	1.63	✓
		Direction 2	90N MIN.	5	5	N	203.74	209.9	199.3	4.73	✓
		Direction 3	90N MIN.	5	5	N	204.97	221.6	191.2	10.90	✓
		Direction 4	90N MIN.	5	5	N	216.28	219.5	211.2	3.31	✓
	Unlocking force		50N MAX.	5	5	N	18.93	19.2	18.5	0.32	✓
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.			✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.			✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown			✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown			✓
	Temperature rise	Single pin	ΔT=50℃ MIN.	5	5	℃	33.20	35.4	28.4	2.92	✓
		All pin	ΔT=50℃ MIN.	5	5	℃	42.70	43.4	42.2	0.40	✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓
	Coplanarity	Terminal	0.1mm MAX.	5	5	mm	0.05mm Max.				✓
		Hold down	0.1mm MAX.	5	5	mm	0.04mm Max.				✓
	Peg strength	Position 1	70N MIN.	5	5	N	136.59	140.2	130.0	3.86	✓
		Position 2	100N MIN.	5	5	N	219.79	225.2	211.0	5.64	✓
		Position 3	100N MIN.	5	5	N	846.94	872.7	812.0	23.51	✓
	Lead strength		30N MIN.	2	40	N	34.25	38.4	31.7	2.86	✓
	Audible click		60dB MIN.	5	5	db	64.28	65.4	62.2	0.53	✓
	Terminal crimp strength		70N MIN.	5	5	N	76.86	81.2	72.4	3.62	✓
	Terminal insertion force		0.5N~3.0N	5	5	N	1.078	1.43	0.92	0.147	✓
	Terminal removal force		0.5N~3.0N	5	5	N	1.150	1.45	0.91	0.204	✓
	Terminal contact force		3N MIN.	5	5	N	3.58	3.70	3.30	0.15	✓
	Terminal bend strength	a	Must not bend 1mm or over	5	5	-	0mm (Not bend in the initial position.)				✓
		b	Terminal bending 30°MAX	5	5	-	Terminal bending 10°MAX				✓
	Voltage drop		10mV/A MAX.	5	100	mV/A	3.277	4.18	2.55	0.365	✓
	Dry circuit resistance		10mΩ MAX.	5	100	mΩ	3.046	3.90	2.17	0.424	✓
	Terminal retention force	With secondary lock	49N MIN.	2	40	N	83.33	84.7	78.3	1.32	✓
		Without secondary lock	20N MIN.	2	40	N	47.93	54.6	42.6	3.11	✓
	Terminal to housing insertion force		10N MAX.	2	40	N	1.96	2.2	1.7	0.13	✓
	Retainer insertion/removal force	Insertion force	29.4N MAX.	5	5	N	4.78	5.2	4.6	0.25	✓
		Removal force	5.5N MIN.	5	5	N	9.76	10.2	9.0	0.46	✓
	Housing lock strength without terminals		49N MIN.	5	5	N	143.28	149.1	137.2	5.38	✓
	Sn whisker		125μm MAX.	5	5	-	No whisker				✓

Table 21. List of results: Properties after endurance tests – I (20P)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement
							Avg	Max	Min	s	
Repeated insertion/removal	Connector mating force	After 5 repeat	65N MAX.	5	5	N	33.16	34.8	32.0	1.18	✓
		After test	65N MAX.	5	5	N	41.58	42.4	40.0	1.00	✓
	Connector unmating force	After 5 repeat	50N MAX.	5	5	N	31.24	32.5	30.1	0.93	✓
		After test	50N MAX.	5	5	N	32.27	32.8	31.5	0.45	✓
	Voltage drop	Initial	10mV/A MAX.	5	100	mV/A	3.389	4.47	2.66	0.306	✓
		After test	20mV/A MAX.	5	100	mV/A	4.698	6.11	3.43	0.620	✓
Resistance to forcedmating	Connector mating force		65N MAX.	5	5	N	32.06	33.8	31.0	1.07	✓
	Connector unmating force		50N MAX.	5	5	N	29.70	30.7	28.4	1.07	✓
	Voltage drop	Initial	10mV/A MAX.	5	100	mV/A	3.163	3.73	2.54	0.272	✓
		After test	20mV/A MAX.	5	100	mV/A	3.118	3.74	2.32	0.323	✓
Fretting corrosion	Dry circuit resistance	Monitor dry circuit resistance during test.	20mΩMAX.	5	5	mΩ	See Graph 1 on Sheet 25				✓
Thermal a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓
	Connector retention force	Direction 1	100N MIN.	5	5	N	153.01	155.6	150.9	1.86	✓
	Terminal crimp strength		70N MIN.	5	5	N	81.46	80.3	76.2	2.30	✓
	Dry circuit resistance	Initial	10mΩ MAX.	5	100	mΩ	2.845	4.08	2.42	0.302	✓
		After test	20mΩ MAX.	5	100	mΩ	3.565	5.26	2.17	0.716	✓
	Terminal retention force	With secondary lock	49N MIN.	2	40	N	76.56	79.7	70.7	2.27	✓
		Without secondary lock	20N MIN.	2	40	N	47.05	52.0	41.6	2.14	✓
	Housing lock strength without terminals		49N MIN.	5	5	N	144.25	146.2	143.4	1.14	✓
Low temperature a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓
	Dry circuit resistance	Initial	10mΩ MAX.	5	100	mΩ	2.859	4.11	2.22	0.456	✓
		After test	20mΩ MAX.	5	100	mΩ	3.302	4.53	2.07	0.611	✓
	Terminal retention force	With secondary lock	49N MIN.	2	40	N	80.49	82.0	76.8	1.06	✓
		Without secondary lock	20N MIN.	2	40	N	43.36	52.0	37.8	2.10	✓
Housing lock strength without terminals		49N MIN.	5	5	N	145.49	148.0	143.2	2.08	✓	
Thermal shock	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓
	Connector retention force	Direction 1	100N MIN.	5	5	N	155.84	157.2	152.2	2.05	✓
	Terminal crimp strength		70N MIN.	5	5	N	75.76	78.1	73.8	1.96	✓
	Dry circuit resistance	Initial	10mΩ MAX.	5	100	mΩ	2.510	3.03	2.17	0.206	✓
		After test	20mΩ MAX.	5	100	mΩ	4.048	9.73	2.87	0.977	✓
	Terminal retention force	With secondary lock	49N MIN.	2	40	N	78.65	81.7	73.7	2.24	✓
		Without secondary lock	20N MIN.	2	40	N	50.29	59.4	44.8	2.62	✓
Temperature /humidity cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.			✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.			✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown			✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown			✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓
	Dry circuit resistance	Initial	10mΩ MAX.	5	100	mΩ	3.109	4.11	2.61	0.263	✓
		After test	20mΩ MAX.	5	100	mΩ	3.542	6.12	2.62	0.611	✓
	Terminal retention force	With secondary lock	49N MIN.	2	40	N	80.90	83.0	76.4	1.54	✓
Without secondary lock		20N MIN.	2	40	N	50.84	65.7	44.2	5.59	✓	
Resistance to humidity	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
	Connector retention force	Direction 1	100N MIN.	5	5	N	161.36	167.3	158.0	4.04	✓
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.			✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.			✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown			✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown			✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓

Table 22. List of results: Properties after endurance tests – II (20P)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Resistance to humidity	Dry circuit resistance	Initial	10mΩ MAX.	5	100	mΩ	2.793	3.66	2.39	0.317	✓	
		After test	20mΩ MAX.	5	100	mΩ	3.279	4.71	2.29	0.547	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	40	N	77.19	82.3	71.2	2.91	✓	
		Without secondary lock	20N MIN.	2	40	N	46.54	49.6	43.5	1.36	✓	
Resistance to abrasion	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Voltage drop	Initial	10mV/A MAX.	5	100	mV/A	3.117	3.84	2.65	0.300	✓	
		After test	20mV/A MAX.	5	100	mV/A	3.815	6.96	2.77	0.823	✓	
Corrosion gas	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Terminal crimp strength		70N MIN.	5	5	N	77.49	80.7	74.5	2.73	✓	
	Voltage drop	Initial	10mV/A MAX.	5	100	mV/A	2.970	3.45	2.36	0.289	✓	
		After test	20mV/A MAX.	5	100	mV/A	3.238	4.32	2.23	0.439	✓	
Resistance to stress corrosion	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal crimp strength		70N MIN.	5	5	N	82.94	84.3	80.8	1.19	✓	
Conden sation	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	100	mΩ	3.278	3.96	2.66	0.294	✓	
		After test	20mΩ MAX.	5	100	mΩ	3.270	4.29	2.57	0.387	✓	
Dump heat cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Insulation resistance	250h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		500h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		750h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		1000h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Migration		No migration	5	5	-	No migration				✓	
Current cycle	Temperature rise		ΔT=50℃ MAX.	5	5	℃	42.65	44.2	40.8	1.48	✓	
	Voltage drop	Initial	10mV/A MAX.	5	100	mV/A	2.872	3.62	2.06	0.283	✓	
		After test	20mV/A MAX.	5	100	mV/A	3.701	4.78	2.70	0.462	✓	
Shock	Voltage drop	Initial	10mV/A MAX.	5	100	mV/A	3.159	4.41	1.85	0.548	✓	
		After test	20mV/A MAX.	5	100	mV/A	3.776	4.91	2.92	0.469	✓	
	Microcut		1μsMIN.7ΩMAX.	5	5	-	No microcut				✓	
Vibration	Temperature rise		ΔT=50℃ MAX.	5	5	℃	45.30	46.3	43.7	0.89	✓	
	Voltage drop	Initial	10mV/A MAX.	5	100	mV/A	3.371	4.08	2.95	0.260	✓	
		After test	20mV/A MAX.	5	100	mV/A	3.925	6.82	2.59	0.581	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	100	mΩ	3.191	5.49	2.68	0.416	✓	
		After test	20mΩ MAX.	5	100	mΩ	3.674	6.82	2.37	0.639	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	
Vibration with temperature change	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal contact force		3N MIN.	5	5	N	3.471	3.76	3.14	0.222	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	100	mΩ	2.950	4.31	2.45	0.366	✓	
		After test	20mΩ MAX.	5	100	mΩ	4.578	7.11	3.13	0.916	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	

Table 23. List of results: Initial properties (32P)


	Measurement		Requirements		Set	n	Unit	Data				Judgement
								Avg	Max	Min	s	
Initial Characteristics	Terminal appearance		No detrimental deformation		5	5	-	No detrimental deformation				✓
	Terminal outer dimension		Satisfy drawing dimension		5	5	-	Satisfies drawing dimension				✓
	Housing appearance		No detrimental deformation		5	5	-	No detrimental deformation				✓
	Housing outer dimension		Satisfy drawing dimension		5	5	-	Satisfies drawing dimension				✓
	Feeling (insertion/removal)		No discomfort		5	5	-	No discomfort				✓
	Connector mating force		75.4N MAX.		5	5	N	64.04	65.5	61.8	1.50	✓
	Connector unmating force		70.4N MAX.		5	5	N	61.73	63.9	59.6	1.72	✓
	Connector retention force	Direction 1	90N MIN.		5	5	N	187.23	192.2	182.9	3.68	✓
		Direction 2	90N MIN.		5	5	N	184.75	185.8	182.9	1.63	✓
		Direction 3	90N MIN.		5	5	N	265.33	269.2	261.3	3.94	✓
		Direction 4	90N MIN.		5	5	N	239.16	247.6	232.7	7.67	✓
	Unlocking force		50N MAX.		5	5	N	16.81	18.7	15.3	1.70	✓
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Temperature rise	Single pin	ΔT=50℃ MIN.		5	5	℃	25.69	26.3	25.0	0.58	✓
		All pin	ΔT=50℃ MIN.		5	5	℃	13.48	14.0	12.8	0.61	✓
	Leak current		1mA MAX.		5	5	-	1μA MAX.				✓
	Coplanarity	Terminal	0.1mm MAX.		5	5	mm	0.04mm Max.				✓
		Hold down	0.1mm MAX.		5	5	mm	0.04mm Max.				✓
	Peg strength	Position 1	70N MIN.		5	5	N	122.03	135.8	104.4	13.96	✓
		Position 2	100N MIN.		5	5	N	255.35	268.8	242.8	13.06	✓
		Position 3	100N MIN.		5	5	N	587.81	620.5	554.6	32.96	✓
	Lead strength		30N MIN.		2	64	N	31.47	32.0	31.1	0.28	✓
	Audible click		60dB MIN.		5	5	db	61.57	62.3	61.1	0.43	✓
	Terminal crimp strength		70N MIN.		5	5	N	80.64	83.1	77.3	1.96	✓
	Terminal insertion force		0.5N~3.0N		5	5	N	1.439	1.67	1.28	0.111	✓
												✓
	Terminal removal force		0.5N~3.0N		5	5	N	1.634	1.88	1.31	0.100	✓
												✓
	Terminal contact force		3N MIN.		5	5	N	3.648	3.84	3.25	0.204	✓
	Terminal bend strength	a	Must not bend 1mm or over		5	5	-	0mm (Not bend in the initial position.)				✓
b		Terminal bending 30°MAX		5	5	-	Terminal bending 10°MAX				✓	
Voltage drop		10mV/A MAX.		5	160	mV/A	2.380	3.30	1.51	0.375	✓	
Dry circuit resistance		10mΩ MAX.		5	160	mΩ	2.509	3.09	1.81	0.301	✓	
Terminal retention force	With secondary lock	49N MIN.		2	64	N	55.32	57.4	52.9	2.90	✓	
	Without secondary lock	20N MIN.		2	64	N	88.63	89.9	84.9	1.16	✓	
Terminal to housing insertion force		10N MAX.		2	64	N	3.082	3.67	2.41	0.068	✓	
Retainer insertion/removal force	Insertion force	29.4N MAX.		5	5	N	3.294	3.33	3.26	0.033	✓	
	Removal force	5.5N MIN.		5	5	N	6.737	6.95	6.35	0.336	✓	
Housing lock strength without terminals		49N MIN.		5	5	N	136.33	136.8	135.7	0.57	✓	
Sn whisker		125μm MAX.		5	5	-	No whisker				✓	

Table 24. List of results: Properties after endurance tests – I (32P)


Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Repeated insertion/removal	Connector mating force	After 5 repeat	75.4N MAX.	5	5	N	64.58	65.6	63.1	1.32	✓	
		After test	75.4N MAX.	5	5	N	65.28	66.3	63.6	1.50	✓	
	Connector unmating force	After 5 repeat	70N MAX.	5	5	N	61.98	63.8	60.7	1.62	✓	
		After test	70N MAX.	5	5	N	65.40	66.3	64.1	1.11	✓	
	Voltage drop	Initial	10mV/A MAX.	5	160	mV/A	1.810	2.46	1.11	0.274	✓	
		After test	20mV/A MAX.	5	160	mV/A	3.590	6.18	2.39	0.625	✓	
Resistance to forcedmating	Connector mating force		70N MAX.	5	5	N	60.79	63.2	57.1	2.36	✓	
	Connector unmating force		70N MAX.	5	5	N	62.54	65.3	60.9	1.75	✓	
	Voltage drop	Initial	10mV/A MAX.	5	160	mV/A	2.557	2.69	2.36	0.137	✓	
		After test	20mV/A MAX.	5	160	mV/A	2.594	2.64	2.52	0.048	✓	
Fretting corrosion	Dry circuit resistance	Monitor dry circuit resistance during test.	20mΩMAX.	5	5	mΩ	See Graph 1 on Sheet 25				✓	
Thermal a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	180.56	181.9	177.9	1.63	✓	
	Terminal crimp strength		70N MIN.	5	5	N	83.32	86.1	81.0	1.55	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	160	mΩ	2.107	3.69	1.26	0.359	✓	
		After test	20mΩ MAX.	5	160	mΩ	2.025	4.47	1.39	0.370	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	64	N	82.59	85.2	80.2	1.44	✓	
		Without secondary lock	20N MIN.	2	64	N	49.88	56.4	46.3	3.02	✓	
	Housing lock strength without terminals		49N MIN.	5	5	N	141.85	144.1	140.6	1.35	✓	
Low temperature a going	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	160	mΩ	2.238	3.76	1.23	0.432	✓	
		After test	20mΩ MAX.	5	160	mΩ	2.313	3.08	1.45	0.423	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	64	N	89.51	90.6	89.0	0.39	✓	
		Without secondary lock	20N MIN.	2	64	N	49.95	55.7	45.7	2.95	✓	
	Housing lock strength without terminals		49N MIN.	5	5	N	144.16	148.7	141.0	3.40	✓	
Thermal shock	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	188.67	190.5	186.0	2.40	✓	
	Terminal crimp strength		70N MIN.	5	5	N	86.88	89.0	83.4	1.75	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	160	mΩ	2.555	3.23	1.81	0.320	✓	
		After test	20mΩ MAX.	5	160	mΩ	3.637	7.75	2.76	0.799	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	64	N	83.40	88.3	79.5	2.37	✓	
		Without secondary lock	20N MIN.	2	64	N	51.82	59.2	47.5	2.69	✓	
	Temperature /humidity cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓
Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓		
Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓	
			(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓	
Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓	
			(b) Between terminal and earth	5	5	-	No insulation breakdown				✓	
Leak current		1mA MAX.	5	5	-	1μA MAX.				✓		
Dry circuit resistance		Initial	10mΩ MAX.	5	160	mΩ	2.487	3.09	1.91	0.308	✓	
		After test	20mΩ MAX.	5	160	mΩ	3.160	10.37	2.55	0.725	✓	
Terminal retention force		With secondary lock	49N MIN.	2	64	N	89.67	90.4	87.3	1.00	✓	
		Without secondary lock	20N MIN.	2	64	N	50.69	55.3	47.7	2.14	✓	
Resistance to humidity	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Connector retention force	Direction 1	100N MIN.	5	5	N	202.01	210.3	194.8	6.74	✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Housing lock strength without terminals		49N MIN.	5	5	N	144.16	148.7	141.0	3.40	✓	

Table 25. List of results: Properties after endurance tests – II (32P)

Item	Measurement		Requirements	Set	n	Unit	Data				Judgement	
							Avg	Max	Min	s		
Resistance to humidity	Dry circuit resistance	Initial	10mΩ MAX.	5	160	mΩ	2.493	3.08	1.93	0.315	✓	
		After test	20mΩ MAX.	5	160	mΩ	2.644	3.39	2.26	0.208	✓	
	Terminal retention force	With secondary lock	49N MIN.	2	64	N	90.34	91.3	88.3	0.72	✓	
		Without secondary lock	20N MIN.	2	64	N	49.58	52.2	47.4	1.64	✓	
Resistance to abrasion	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Voltage drop	Initial	10mV/A MAX.	5	160	mV/A	3.054	3.45	2.36	0.762	✓	
		After test	20mV/A MAX.	5	160	mV/A	3.526	4.11	2.76	0.951	✓	
Corrosion gas	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Feeling (insertion/removal)		No discomfort	5	5	-	No discomfort				✓	
	Terminal crimp strength		70N MIN.	5	5	N	87.17	89.9	83.6	1.76	✓	
	Voltage drop	Initial	10mV/A MAX.	5	160	mV/A	2.302	3.26	1.22	0.412	✓	
After test		20mV/A MAX.	5	160	mV/A	2.794	3.86	1.88	0.386	✓		
Resistance to stress corrosion	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal crimp strength		70N MIN.	5	5	N	82.35	85.5	79.3	2.57	✓	
Conden sation	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Insulation resistance		100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Withstanding voltage		No insulation breakdown or erosion	(a) Between terminals	5	5	-	No insulation breakdown				✓
				(b) Between terminal and earth	5	5	-	No insulation breakdown				✓
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	160	mΩ	2.402	3.04	1.75	0.324	✓	
		After test	20mΩ MAX.	5	160	mΩ	2.748	3.36	2.45	0.159	✓	
Dump heat cycle	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Leak current		1mA MAX.	5	5	-	1μA MAX.				✓	
	Insulation resistance	250h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		500h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		750h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
		1000h	100MΩ MIN.	(a) Between terminals	5	5	-	1,000MΩ MIN.				✓
				(b) Between terminal and earth	5	5	-	1,000MΩ MIN.				✓
	Migration		No migration	5	5	-	No migration				✓	
Current cycle	Temperature rise		ΔT=50℃ MAX.	5	5	℃	15.02	15.3	14.8	0.21	✓	
	Voltage drop	Initial	10mV/A MAX.	5	160	mV/A	1.957	2.82	1.28	0.342	✓	
		After test	20mV/A MAX.	5	160	mV/A	1.996	2.62	1.63	0.149	✓	
Shock	Voltage drop	Initial	10mV/A MAX.	5	160	mV/A	2.014	2.93	1.21	0.378	✓	
		After test	20mV/A MAX.	5	160	mV/A	2.060	3.03	1.28	0.382	✓	
	Microcut		1μsMIN.7ΩMAX.	5	5	-	No microcut				✓	
Vibration	Temperature rise		ΔT=50℃ MAX.	5	5	℃	13.81	15.7	12.5	1.17	✓	
	Voltage drop	Initial	10mV/A MAX.	5	160	mV/A	2.167	3.10	1.25	0.384	✓	
		After test	20mV/A MAX.	5	160	mV/A	2.305	3.19	1.43	0.392	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	160	mΩ	2.300	3.33	1.26	0.385	✓	
		After test	20mΩ MAX.	5	160	mΩ	2.402	3.14	1.80	0.222	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	
Vibration with temperature change	Terminal appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Housing appearance		No detrimental deformation	5	5	-	No detrimental deformation				✓	
	Terminal contact force		3N MIN.	5	5	N	3.415	3.59	3.24	0.111	✓	
	Dry circuit resistance	Initial	10mΩ MAX.	5	160	mΩ	2.116	3.81	1.18	0.392	✓	
		After test	20mΩ MAX.	5	160	mΩ	3.162	13.93	1.53	1.318	✓	
	Microcut		No exceed 1μs and 7Ω	5	5	-	No microcut				✓	

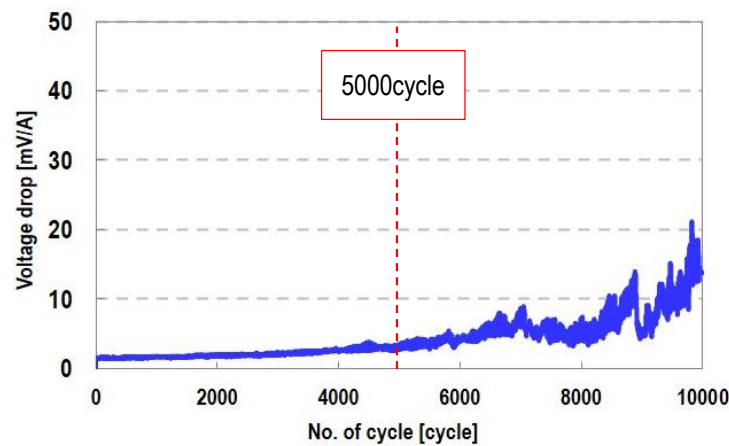


VT009-01

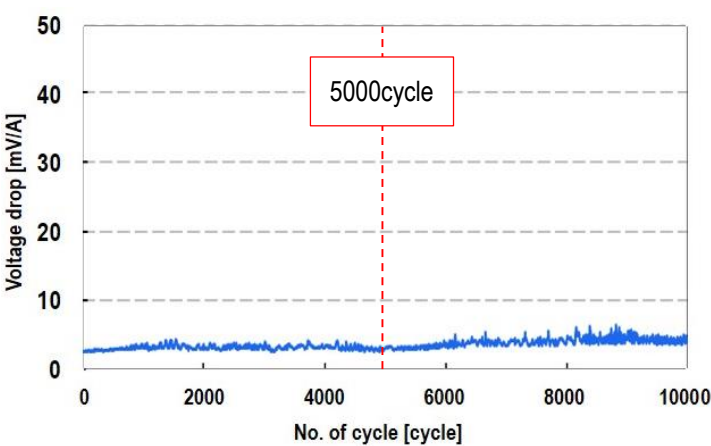


VT009-02

Grapf1. Fretting corrosion Resistance Monitor

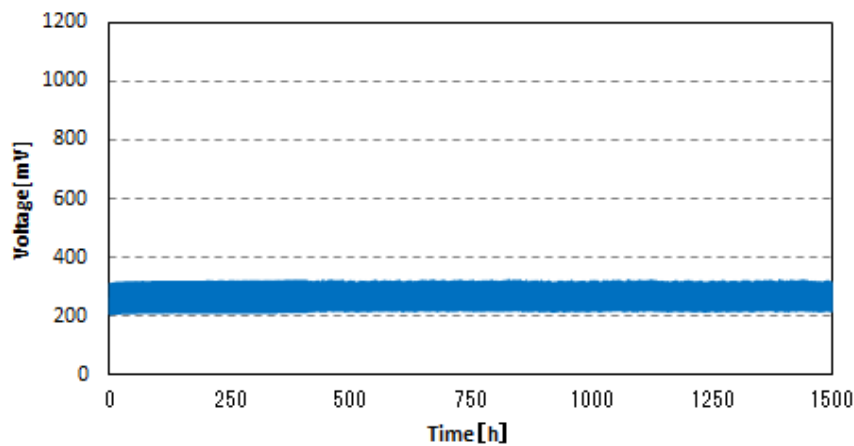

Grapf2. Thermal shock Resistance Monitor

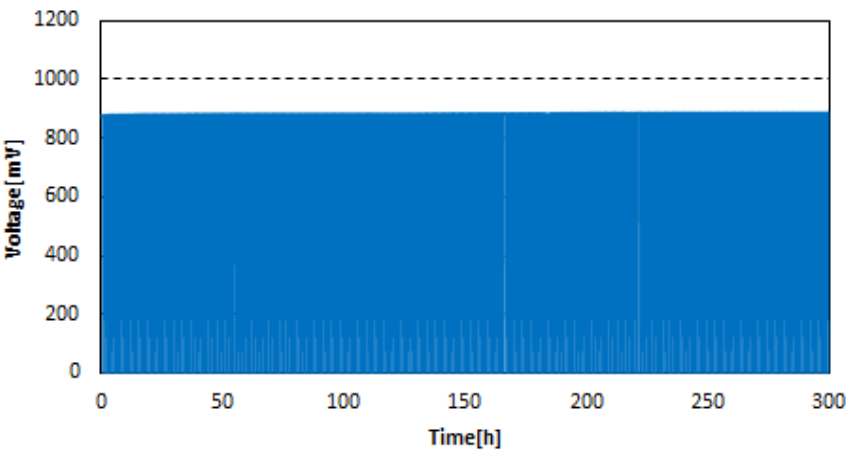

Graph3. Vibration with temperature change Resistance Monitor

Table 26. Initial performances test method - I


Test Item	Procedure																		
Initial characteristics Test Method	Visual(e.g. magnifier) and tactile verification.																		
Terminal outer dimension	Measure dimensions using caliper, micrometer, projector.																		
Housing appearance	Visual(e.g. magnifier) and tactile verification.																		
Housing outer dimension	Measure dimensions using caliper, micrometer, projector.																		
Feeling (insertion/removal)	Verification of feeling by insertion/removal of connector and single terminal.																		
Connector mating force	Measure the force required to mate female and male connectors together at a uniform rate of 100 mm/min. (terminals must be fully populated)																		
Connector unmating Force	Measure the force required to pull the connectors apart at a rate of 100 mm/min. with the locking feature disengaged.																		
Connector Retention Force	Measure the maximum force to pull out female connector from mated state(Figure below). Pull in four directions at a speed of 50mm/min. (terminals must be fully populated) 																		
Unlocking force	Measure the force required to disengage the lock.																		
Insulation resistance	Supply DC500V insulation resistance between (a) terminals (b) terminal and earth on mated connectors.																		
Insulation resistance	Supply AC1000V between (a) terminals (b) terminal and ground on mated connectors for 1minute. Same connection as for insulation resistance test																		
Temperature rise	Supply current to mated connectors, measure the temperature rise at crimp area, when temperature is saturated. Female connector wire length: 300mm •Single pole: 7A to 1 terminal •All poles: Connect all poles and apply the current that is calculated by 7A multiplied by the coefficient in Table below. <table border="1"> <thead> <tr> <th>Pole</th><th>Coefficient</th></tr> </thead> <tbody> <tr> <td>1</td><td>1</td></tr> <tr> <td>2~3</td><td>0.75</td></tr> <tr> <td>4~5</td><td>0.6</td></tr> <tr> <td>6~8</td><td>0.55</td></tr> <tr> <td>9~12</td><td>0.5</td></tr> <tr> <td>13~20</td><td>0.4</td></tr> <tr> <td>21~30</td><td>0.3</td></tr> <tr> <td>>30</td><td>0.2</td></tr> </tbody> </table>	Pole	Coefficient	1	1	2~3	0.75	4~5	0.6	6~8	0.55	9~12	0.5	13~20	0.4	21~30	0.3	>30	0.2
Pole	Coefficient																		
1	1																		
2~3	0.75																		
4~5	0.6																		
6~8	0.55																		
9~12	0.5																		
13~20	0.4																		
21~30	0.3																		
>30	0.2																		
Leak current	Supply 16±0.1V to mated connector terminals. Measure maximum leak current.																		

Table 27. Initial performances test method - II

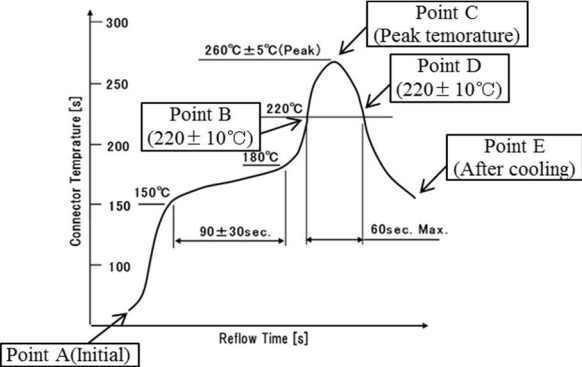
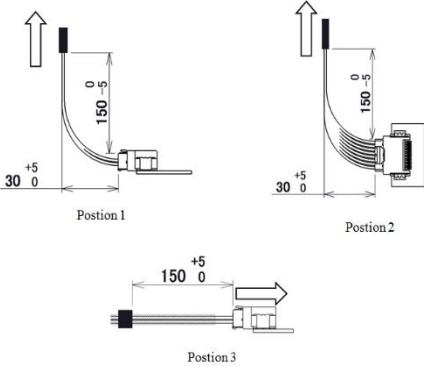
Test Item	Procedure
Coplanarity	Measure coplanarity of male connector lead and peg at initial and 5 points specified in Figure below during the reflow. 
Peg strength	Mate a wired female connector to the soldered male connector, and pull the wire at a rate of 100mm/min. Measure the force when the peg comes out from the PCB. If mating portion has some breakage, it is needed to reinforce them. Fix the connector in the following 3 positions, and pull towards the arrowed direction. 
Lead strength	Using a hook, pull a lead which is soldered onto the male connector, at the rate of 10mm/min at 45°, measure the force when lead comes off the PCB

Table 28. Initial performances test method -III


Test Item	Procedure
Audible click	Horizontally insert fully populated female connector to male connector which is soldered onto PCB. Measure by the sound with sound level meter, and analyze the frequency analyzer (FFT). Measurement range: 10kHz~20kHz Background noise: 5kHz MIN, Peak: 50dB MAX Measurement must be done in a room. Keep the position of the connector lock 600mm away from sound level meter. Fix PCB and measure the lock sound without any touches.
Terminal crimp strength	Crimp wire of 100mm approx. to female terminal and pull at the speed of 50-100mm/min. Measure the force required to break the wire or pull out of the crimp portion. Do not used insulation barrel
Terminal insertion force	Measure the force to insert female terminal into fixed male connector at a speed of 100 mm/min.
Terminal removal force	Measure the force to pull out female terminal from male connector at a speed of 100 mm/min.
Terminal contact force	Calculate female and male terminal contact force. Measure female terminal spring displacement-force characteristics, and calculate contact force from displacement upon male terminal insertion. (accuracy 0.01mm MAX)
Terminal bend strength	(a) Push male terminals in mating direction from housing entrance at speed of 50mm/min with the load (maximum of connector insertion force). (b) Remove housing walls around male terminals. Push terminals at speed of 50mm/min in the direction perpendicular to mating axes (4 directions: up, down, left, right) with force of 3N.
Voltage drop	Open: 12V, Short circuit: 1A Measure the difference between male connector lead and temp. measurement point when temperature reached saturation at 75mm from female terminal crimp. Then, subtract voltage drop of wires and male connector lead Wire resistance: 3.77mΩ/75mm (20°C) or actual measurement. 
Dry circuit resistance	Open: 20±5mV, Short circuit: 10±0.5mA Subtract resistance of point 75mm from female terminal crimp and male connector lead. Then, subtract resistance of wires and male connector lead Wire resistance: 3.77mΩ/75mm (20°C) or actual measurement.
Microcut monitoring	Measure dry circuit resistance.

Table 29. Initial performances test method -IV

Test Item	Procedure
Terminal retention force	Measure the force to pull out female terminal from female connector housing at a speed of 100mm/min. Test with and without retainer.
Terminal to housing insertion force	Measure the force to fully insert female terminal into female connector housing at a speed of 100mm/min.
Retainer/hinge insertion/removal force	Fully populate female connector housing. Measure the force required to insert and remove the retainer/hinge at speed of 100mm/min.
Housing lock strength without terminals	Measure the maximum force to pull out unpopulated female connector housing from mated status at a speed of 100mm/min.
Sn whisker	Check the surface of connector's metal portions(terminals, lead) with microscope, etc. to find Sn whisker. Use microscope with magnification of X100 MIN. Check closely not to lose sight of whisker with different magnifications.

Table 30. Environmental performances test method - I

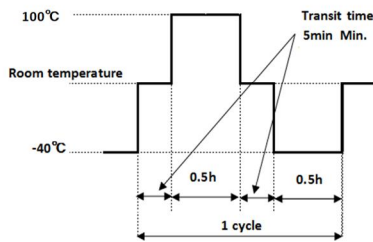
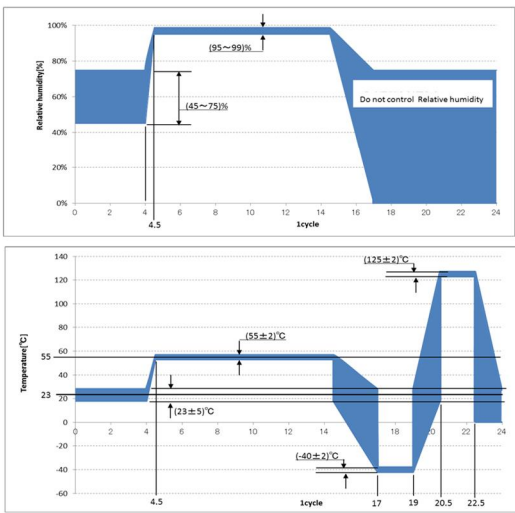
Test item	Procedure
Repeated insertion/removal	Measure the force required to insert/remove populated female connector into/from fixed male connector at speed of 100mm/min. Repeat 10 times. Lock must be disengaged.
Resistance to forced mating (with 98N in 4 directions)	Insert populated female connector into male connector. Apply force of 98N from 4 directions perpendicular to insertion axes. Apply force twice per direction. Repeat 10 times. Female connector insertion depths: 1)depth at which terminals start to touch and 2) depth of maximum insertion.
Fretting corrosion	Insert female terminals into male connector and subject them to micro motion. Frictional distance: 0.23mm, Cycle time: 1-2 Hz, No. of cycles: 1,0000 (Evaluation : 5,000 cycles) Monitor dry circuit resistance during test.
Thermal aging	Place mated connectors in thermal chamber at $125\pm 3^{\circ}\text{C}$ for 120h. Remove the connectors from the chamber and leave it to ambient temperature to recover.
Low temperature aging	Place mated connector in thermal chamber at $-40\pm 3^{\circ}\text{C}$ for 120h. Repeat insert/remove for 5 times immediately after removing from the chamber, then leave to recover to ambient temperature.
Thermal shock	Place mated connectors in thermal chamber and subject them to heat /cold cycle ($100\pm 3^{\circ}\text{C}/-40\pm 3^{\circ}\text{C}$). No of cycles: 3000 Duration (0.5h) may be shortened if sample's temperature reaches test temperature requirement early. Monitor resistance during test, open circuit $20\pm 5\text{mV}$, short circuit $10\pm 0.5\text{mA}$ 
Temperature/humidity cycle	Place mated connectors in climatic chamber and subject them to the cycle pattern specified in Figure below. Duration 24h, No. of cycles: 10, Temperature: $85\pm 3^{\circ}\text{C}$. 

Table 31. Environmental performances test method - II


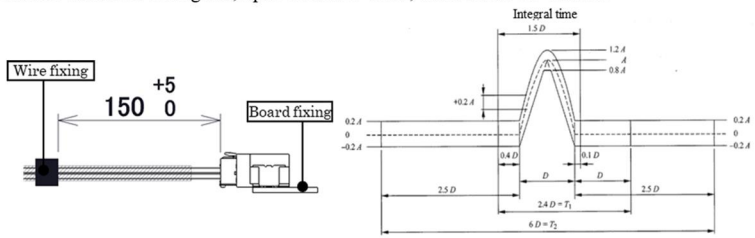
Test item	Procedure
Resistance to humidity	Place mated connectors in climatic chamber and subject them to $60^{\circ}\text{C}\pm 5^{\circ}\text{C}$, $90\sim 95\%\text{RH}$ for 96h. Hang connectors to prevent any dews developing on the connectors.
Resistance to abrasion	Suspend mated connectors in the chamber and spray dust for 10s every 15 min. Insert/remove connectors every other cycle. No. of cycles: 8 Chamber length must be 900-1200mm. Use approx. 1.5kg of dust particles of Kanto Loam layer or Portland cement (JIS R5210).
Corrosion gas	Place male and female connectors (not mated) in $25\pm 5\text{ppm}$, $40\pm 2^{\circ}\text{C}$, $90\sim 95\%\text{RH}$, SO_2 gas for 96h.
Resistance to stress corrosion	Degrease female terminals, cleanse with 10% H_2SO_4 , rinse under water and dry. Submerge in solution of free ammonia 6N, copper 10.2g/L for 3h, then remove. Making test solution: Mix, ammonia (28%~30%): Purified water = 1:1.6, to make 6N ammonia water. Mix copper powder (10.2g) with 6N ammonia solution (1L).
Condensation	Place mated connectors in climatic chamber and subject them to the following cycle. 1 cycle: 1h at $-30\pm 3^{\circ}\text{C}$, then 1h at $25\pm 3^{\circ}\text{C}$ and $90\pm 5\%\text{RH}$ No. of cycles: 48 
Dump heat cycle	Place mated connectors in the chamber and apply current for 1000h at $85\pm 3^{\circ}\text{C}$, $85\pm 5\%\text{RH}$. Measure the leak current during the test.
Current cycle	Place the mated connectors in thermal chamber at $70^{\circ}\text{C}\pm 3^{\circ}\text{C}$. Energize 1.5mm terminals and 0.5mm terminals in series, and apply the current value (1.5mm terminal : 7A , 0.5mm terminal : 3A) for 45min, then break for 15min. No. of cycles: 300.
Shock	Fix mated connectors and subject to impact. Use impact according to Figure below sinusoidal half-wave. Duration $D=6\text{ms}$, Peak acceleration $A=981\text{m/s}^2$ Directions: 6 directions (top, down, left, right, front back), 3 shocks each direction Connect all terminals in direct circuit. Monitor resistance during test, open circuit $20\pm 5\text{mV}$, short circuit $10\pm 0.5\text{mA}$. 

Table 32. Environmental performances test method - III

Test item	Procedure
Vibration	Fix mated connectors in same way as the shock test on fixture and subject them to vibration. ◎Vibration condition •Direction: 3 (front-back, left-right, top-bottom) •Acceleration: 66.6m/s², •Duration: 2h(front-back, left-right), 4h(top-bottom) •Frequency: 10-50Hz •Sweep time: 8min (per sweep) Energize all terminals in series with, open 13±1/0V, short circuit 10±0.5mA, continuously during test.
Vibration with temperature change	Fix mated connectors in same way as the shock test on fixture and subject them to vibration at 100±3°C. ◎Vibration condition •Acceleration: 59.8m/s² •Frequency: 20-200Hz •Sweep time: 3min (per sweep) Apply the current value(1.5mm terminal : 4.5A , 0.5mm terminal : 2A) for 45min, break for 15min. No. of cycles: 300 Repeat in other directions. Monitor resistance during current supply. After test, carry out vibration test on 3 axes, each for 1h. Check for any microcuts.