

MHF® 4L Connector

Plug Parts No. 20565-001R-13, 20565-001R-13-P, 20572-001R-08

Receptacle Parts No. 20579-001E, 20579-001E-01

Test Report

Product Specification no. PRS-1907

7	T25051	June 17, 2025	Y. Kuribayashi	H. Takao	K. Yufu
6	T22108	June 24, 2022	H. Lu	Y. Shimizu	M. Takemoto
5	T22077	May 31, 2022	Y. Imaji	K. Yufu	Y. Hashimoto
4	T21094	October 22, 2021	K. Ikeshita		M. Takemoto
Rev.	ECN	Date	Prepared by	Checked by	Approved by

1. Purpose

To evaluate the performance of MHF 4L Connector in accordance with PRS-1907.

2. Specimen

(1) MHF 4L PLUG (Part No. 20565-001R-13, 20565-001R-13-P, 20572-001R-08)

(2) MHF 4L RECEPTACLE (Part No. 20579-001E-01)

*Part No. 20579-001E, 20579-001E-01 are different in the packing style only,
so we tested part No. 20579-001E-01 as representative.

3. Test Sequence

All the evaluations were performed in accordance with Table 1. Test Sequence.

4. Result

See Table 2, Graph 1 to 20. For the details of the testing conditions and requirements, see PRS-1907.

The “n” in the tables show the number of measurement points.

5. Conclusion

All the specimens met the requirements of PRS-1907.

Table 1 Test Sequence and Sample Quantity

Test Item		Group															
		A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
Contact resistance							1,3		1,3	1,3	1,5	1,3	1,5	1,3	1,3		
Insulation resistance											2,6		2,6				
Dielectric withstanding voltage		1									3,7		3,7				
VSWR			1														
Mating force Un-mating force				1													
Cable retention force at 30 degree					1												
Cable retention force at 0 degree						1											
Durability							2										
Shearing strength								1									
Vibration									2								
Shock										2							
Thermal shock											4						
High temperature life												2					
Humidity (Steady State)													4				
Saltwater spray														2			
H ₂ S gas															2		
Solder ability																1	
Soldering heat resistance																	1
Specimen quantity. (pcs.)	Plug	10	10	10	10	10	10	-	10	10	10	10	10	10	10	-	-
	Receptacle		5					12								10	10

※Numbers indicate test sequences

Table 2-1

Group	Test items		Specification	n	Unit	AVE.	MAX.	MIN.	S	Judgement	
		Measurements									
A	Dielectric withstanding voltage										
	Spec: No creeping discharge, flashover, no insulator breakdown shall occur.										
	20565-001R-13, 20565-001R-13-P		-	10	-	No abnormality				Pass	
	20572-001R-08		-	10	-	No abnormality				Pass	
B	VSWR										
	Plug	20565-001R-13, 20565-001R-13-P									
		0.1~3.0GHz		1.30 MAX.	10	-	1.094	1.10	1.08	0.008	Pass
		3.0~6.0GHz		1.45 MAX.		-	1.264	1.29	1.25	0.012	Pass
		6.0~9.0GHz		1.60 MAX.		-	1.409	1.45	1.38	0.021	Pass
		9.0~12.0GHz		1.90 MAX.		-	1.567	1.62	1.51	0.030	Pass
		20572-001R-08									
		0.1~3.0GHz		1.30 MAX.	10	-	1.183	1.20	1.17	0.011	Pass
		3.0~6.0GHz		1.45 MAX.		-	1.326	1.36	1.29	0.018	Pass
		6.0~9.0GHz		1.60 MAX.		-	1.367	1.40	1.33	0.019	Pass
		9.0~12.0GHz		1.90 MAX.		-	1.141	1.47	1.34	0.031	Pass
	Receptacle										
		0.1~3.0GHz		1.30 MAX.	5	-	1.050	1.06	1.04	0.005	Pass
		3.0~6.0GHz		1.40 MAX.		-	1.119	1.12	1.12	0.002	Pass
		6.0~9.0GHz		1.50 MAX.		-	1.301	1.32	1.28	0.013	Pass
		9.0~12.0GHz		1.65 MAX.		-	1.469	1.52	1.43	0.032	Pass
	C	Mating force 20565-001R-13, 20565-001R-13-P									
		Initial		30N MAX.	10	N	20.25	21.8	18.9	1.00	Pass
		After testing		30N MAX.			10.85	11.6	10.0	0.61	Pass
20572-001R-08											
Initial		30N MAX.	10	N	20.11	21.7	18.3	1.20	Pass		
After testing		30N MAX.			10.79	11.6	10.0	0.57	Pass		
Unmating force 20565-001R-13, 20565-001R-13-P											
Initial		20N MAX.,5N MIN.	10	N	12.90	14.7	11.0	0.98	Pass		
After testing		20N MAX.,3N MIN.			9.03	10.7	7.4	0.89	Pass		
20572-001R-08											
Initial		20N MAX.,5N MIN.	10	N	14.05	16.2	13.0	0.95	Pass		
After testing		20N MAX.,3N MIN.			10.06	11.3	9.0	0.84	Pass		
D		Cable retention force at 30 degree									
		20565-001R-13, 20565-001R-13-P									
	Electrical discontinuity										
	Pass critria: No electrical discontinuity grater than 1μs shall occur.										
	-		-	10	-	No discontinity				Pass	
	Appearance										
	Spec: No abnormality adversely affecting the performance shall occur.										
	Initial		No abnormality	10	-	No abnormality				Pass	
	After testing		No abnormality			No abnormality				Pass	
	20572-001R-08										
	Electrical discontinuity										
	Pass critria: No electrical discontinuity grater than 1μs shall occur.										
	-		-	10	-	No discontinity				Pass	
	Appearance										
	Spec: No abnormality adversely affecting the performance shall occur.										
	Initial		No abnormality	10	-	No abnormality				Pass	
	After testing		No abnormality			No abnormality				Pass	

Table 2-2

Group	Test items	Specification	n	Unit	AVE.	MAX.	MIN.	S	Judgement
	Measurements								
E	Cable retention force at 0 degree								
	20565-001R-13, 20565-001R-13-P								
	Electrical discontinuity								
	Pass criteria: No electrical discontinuity grater than 1μs shall occur.								
	-	-	10	-	No discontinuity				Pass
	Appearance								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing	No abnormality			No abnormality				Pass
	20572-001R-08								
	Electrical discontinuity								
	Pass criteria: No electrical discontinuity grater than 1μs shall occur.								
	-	-	10	-	No discontinuity				Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing	No abnormality			No abnormality				Pass
F	Durability								
	20565-001R-13, 20565-001R-13-P								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	8.45	9.3	7.7	0.51	Pass
	After testing	-			9.07	9.8	8.2	0.55	-
	ΔR	Δ20mΩ MAX.			0.63	1.7	-0.2	0.63	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	5.84	6.9	5.2	0.49	Pass
	After testing	-			6.62	7.2	6.2	0.36	-
	ΔR	Δ20mΩ MAX.			0.78	1.5	-0.2	0.51	Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing	No abnormality			No abnormality				Pass
	20572-001R-08								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	8.58	9.8	7.5	0.78	Pass
	After testing	-			9.86	12.0	8.3	1.06	-
	ΔR	Δ20mΩ MAX.			1.28	3.1	-0.2	1.22	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	5.45	5.9	4.2	0.52	Pass
	After testing	-			6.49	7.4	5.8	0.51	-
	ΔR	Δ20mΩ MAX.			1.04	2.1	0.2	0.58	Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing	No abnormality			No abnormality				Pass
G	Shearing strength								
	Direction①	20N MIN.	3	N	28.23	28.8	27.9	0.41	Pass
	Direction②		3	N	30.21	31.1	29.8	0.97	Pass
	Direction③		3	N	28.19	28.9	27.6	0.51	Pass
	Direction④		3	N	31.58	32.5	30.2	0.87	Pass

Table 2-3

Group	Test items	Specification	n	Unit	AVE.	MAX.	MIN.	S	Judgement
	Measurements								
H	Vibration								
	20565-001R-13, 20565-001R-13-P								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	8.34	9.70	7.27	0.80	Pass
	After testing	-			8.77	9.53	7.43	0.55	-
	ΔR	Δ20mΩ MAX.			0.43	1.42	-0.61	0.61	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	6.18	6.64	5.77	0.29	Pass
	After testing	-			6.43	6.96	5.53	0.44	-
	ΔR	Δ20mΩ MAX.			0.24	1.19	-0.67	0.57	Pass
	Electrical discontinuity								
	Spec: No electrical discontinuity greater than 1μs shall occur.								
	After testing	-	10	-	No abnormality				Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing				No abnormality				Pass
	20572-001R-08								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	9.76	11.12	8.02	1.02	Pass
	After testing	-			10.08	10.94	8.23	0.76	-
	ΔR	Δ20mΩ MAX.			0.32	1.60	-0.89	0.90	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	5.19	6.16	4.69	0.45	Pass
	After testing	-			5.97	6.76	5.20	0.52	-
	ΔR	Δ20mΩ MAX.			0.78	1.44	-0.34	0.48	Pass
	Electrical discontinuity								
	Spec: No electrical discontinuity greater than 1μs shall occur.								
	After testing	-	10	-	No abnormality				Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing				No abnormality				Pass

Table 2-4

Group	Test items	Specification	n	Unit	AVE.	MAX.	MIN.	S	Judgement
	Measurements								
J	Shock								
	20565-001R-13, 20565-001R-13-P								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	7.87	8.7	7.1	0.61	Pass
	After testing	-			8.38	8.9	7.9	0.39	-
	ΔR	Δ20mΩ MAX.			0.51	0.9	-0.5	0.45	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	6.09	6.9	5.7	0.44	Pass
	After testing	-			6.64	6.9	6.5	0.17	-
	ΔR	Δ20mΩ MAX.			0.55	1.0	-0.1	0.40	Pass
	Electrical discontinuity								
	Spec: No electrical discontinuity greater than 1μs shall occur.								
	After testing	-	10	-	No abnormality				Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing				No abnormality				Pass
	20572-001R-08								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	9.63	10.7	9.0	0.55	Pass
	After testing	-			10.10	10.7	9.3	0.54	-
	ΔR	Δ20mΩ MAX.			0.46	1.2	-0.1	0.41	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	5.98	7.0	5.2	0.47	Pass
	After testing	-			6.46	7.3	5.5	0.72	-
	ΔR	Δ20mΩ MAX.			0.48	2.1	-0.6	0.79	Pass
	Electrical discontinuity								
	Spec: No electrical discontinuity greater than 1μs shall occur.								
	After testing	-	10	-	No abnormality				Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing				No abnormality				Pass

Table 2-5

Group	Test items	Specification	n	Unit	AVE.	MAX.	MIN.	S	Judgement
	Measurements								
K	Thermal shock								
	20565-001R-13, 20565-001R-13-P								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	8.62	9.5	7.9	0.49	Pass
	After testing	-			8.21	9.1	6.9	0.72	-
	ΔR	Δ20mΩ MAX.			-0.41	0.4	-1.9	0.63	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	6.03	6.9	5.7	0.32	Pass
	After testing	-			6.42	6.9	6.1	0.25	-
	ΔR	Δ20mΩ MAX.			0.39	0.8	-0.2	0.31	Pass
	Insulation residence								
	Initial	500MΩ MIN.	10	MΩ	10,000MΩ MIN.				Pass
	After testing	100MΩ MIN.			10,000MΩ MIN.				Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing				No abnormality				Pass
	20572-001R-08								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	9.18	10.3	8.2	0.63	Pass
	After testing	-			9.25	10.7	7.8	0.94	-
	ΔR	Δ20mΩ MAX.			0.06	2.5	-1.9	1.19	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	6.08	6.8	5.7	0.33	Pass
	After testing	-			6.74	7.3	6.0	0.42	-
	ΔR	Δ20mΩ MAX.			0.66	1.3	0.1	0.35	Pass
	Insulation residence								
	Initial	500MΩ MIN.	10	MΩ	10,000MΩ MIN.				Pass
	After testing	100MΩ MIN.			10,000MΩ MIN.				Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing				No abnormality				Pass

Table 2-6

Group	Test items	Specification	n	Unit	AVE.	MAX.	MIN.	S	Judgement
	Measurements								
L	High temperature life								
	20565-001R-13, 20565-001R-13-P								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	8.06	9.0	7.2	0.66	Pass
	After testing	-			8.38	9.1	6.7	0.76	-
	ΔR	Δ20mΩ MAX.			0.32	1.4	-1.1	0.86	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	6.59	7.7	5.3	0.59	Pass
	After testing	-			6.73	7.6	6.2	0.37	-
	ΔR	Δ20mΩ MAX.			0.14	1.3	-0.3	0.46	Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality			Pass	
	After testing				No abnormality			Pass	
	20572-001R-08								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	9.35	11.4	8.4	0.89	Pass
	After testing	-			9.19	10.4	7.2	0.96	-
	ΔR	Δ20mΩ MAX.			-0.15	1.0	-2.3	1.07	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	5.83	6.7	5.4	0.37	Pass
	After testing	-			6.65	7.5	5.8	0.51	-
	ΔR	Δ20mΩ MAX.			0.83	1.7	0.2	0.53	Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality			Pass	
	After testing				No abnormality			Pass	

Table 2-7


Group	Test items	Specification	n	Unit	AVE.	MAX.	MIN.	S	Judgement
	Measurements								
M	Humidity(Steady State)								
	20565-001R-13, 20565-001R-13-P								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	9.00	10.0	7.6	0.80	Pass
	After testing	-			8.54	10.0	7.1	0.98	-
	ΔR	Δ20mΩ MAX.			-0.46	1.4	-2.1	1.04	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	6.73	7.3	6.4	0.30	Pass
	After testing	-			5.79	6.3	5.1	0.42	-
	ΔR	Δ20mΩ MAX.			-0.93	-0.3	-1.8	0.48	Pass
	Insulation residence								
	Initial	500MΩ MIN.	10	MΩ	10,000MΩ MIN.				Pass
	After testing	100MΩ MIN.			10,000MΩ MIN.				Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing				No abnormality				Pass
	20572-001R-08								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	9.67	10.4	8.0	0.74	Pass
	After testing	-			9.58	11.1	8.6	0.96	-
	ΔR	Δ20mΩ MAX.			-0.10	0.9	-1.3	0.75	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	6.46	6.9	5.4	0.48	Pass
	After testing	-			4.79	6.6	3.7	0.89	-
	ΔR	Δ20mΩ MAX.			-1.68	-0.2	-3.1	0.88	Pass
	Insulation residence								
	Initial	500MΩ MIN.	10	MΩ	10,000MΩ MIN.				Pass
	After testing	100MΩ MIN.			10,000MΩ MIN.				Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing				No abnormality				Pass

Table 2-8


Group	Test items	Specification	n	Unit	AVE.	MAX.	MIN.	S	Judgement
	Measurements								
N	Saltwater spray								
	20565-001R-13, 20565-001R-13-P								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	7.64	8.0	7.3	0.25	Pass
	After testing	-			8.27	9.0	7.3	0.69	-
	ΔR	Δ20mΩ MAX.			0.63	1.4	-0.5	0.67	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	6.12	6.7	5.5	0.41	Pass
	After testing	-			6.47	7.0	5.2	0.47	-
	ΔR	Δ20mΩ MAX.			0.36	1.2	-0.6	0.62	Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing	No abnormality			No abnormality				Pass
	20572-001R-08								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	9.46	10.9	8.5	0.87	Pass
	After testing	-			9.86	10.9	8.6	0.88	-
	ΔR	Δ20mΩ MAX.			0.39	2.4	-0.6	1.07	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	6.14	7.0	5.7	0.40	Pass
	After testing	-			6.85	7.4	6.2	0.42	-
	ΔR	Δ20mΩ MAX.			0.71	1.5	-0.7	0.65	Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing	No abnormality			No abnormality				Pass

Table 2-9


Group	Test items	Specification	n	Unit	AVE.	MAX.	MIN.	S	Judgement
	Measurements								
P	H2S gas								
	20565-001R-13, 20565-001R-13-P								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	8.09	9.7	6.7	0.97	Pass
	After testing	-			8.52	9.6	7.5	0.77	-
	ΔR	Δ20mΩ MAX.			0.43	1.4	-0.7	0.66	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	6.15	7.0	5.5	0.39	Pass
	After testing	-			6.52	7.6	5.5	0.73	-
	ΔR	Δ20mΩ MAX.			0.37	2.0	-0.9	0.95	Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing				No abnormality				Pass
	20572-001R-08								
	Contact resistance of main contact								
	Initial	20mΩ MAX.	10	mΩ	9.34	10.0	8.3	0.62	Pass
	After testing	-			9.11	10.2	8.1	0.63	-
	ΔR	Δ20mΩ MAX.			-0.23	1.1	-1.8	0.88	Pass
	Contact resistance of Ground contact								
	Initial	20mΩ MAX.	10	mΩ	5.68	6.3	5.2	0.36	Pass
	After testing	-			5.78	6.4	5.4	0.26	-
	ΔR	Δ20mΩ MAX.			0.10	0.8	-0.6	0.46	Pass
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	Initial	No abnormality	10	-	No abnormality				Pass
	After testing				No abnormality				Pass
Q	Solder ability								
	Spec: More than 95% of the dipped surface shall be evenly wet.								
	After testing	-	10	-	No abnormality				Pass
R	Reflow soldering heat resistance								
	Appearance								
	Spec: No abnormality adversely affecting the performance shall occur.								
	After testing	-	10	-	No abnormality				Pass

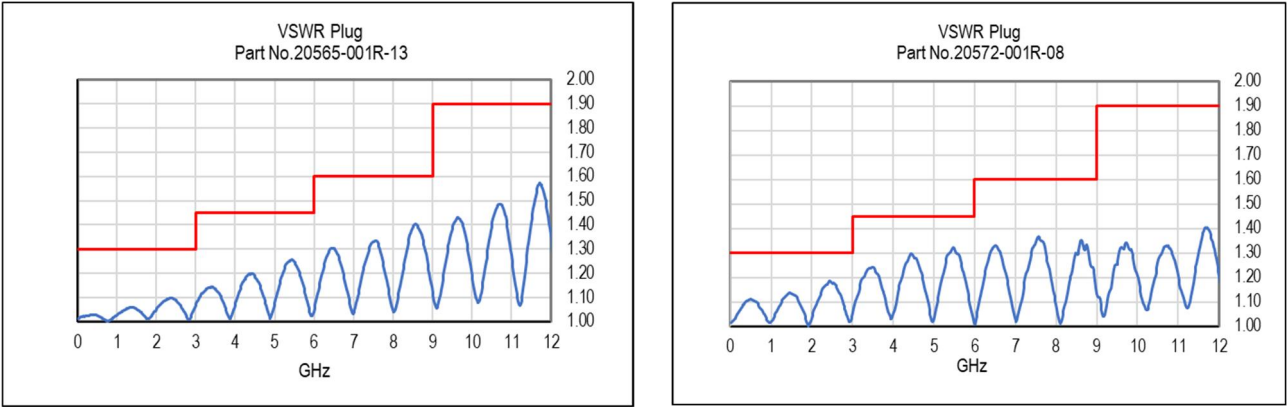



Graph 1

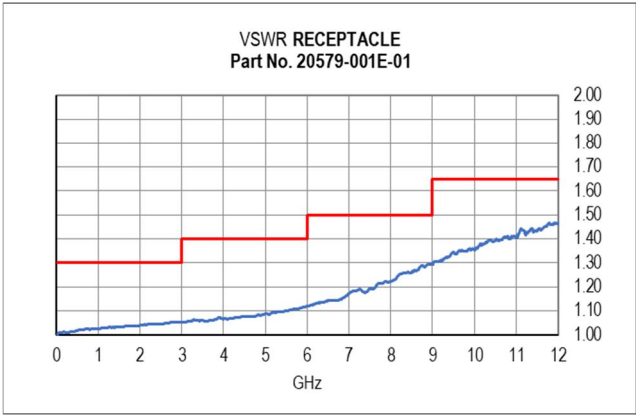



Graph 2

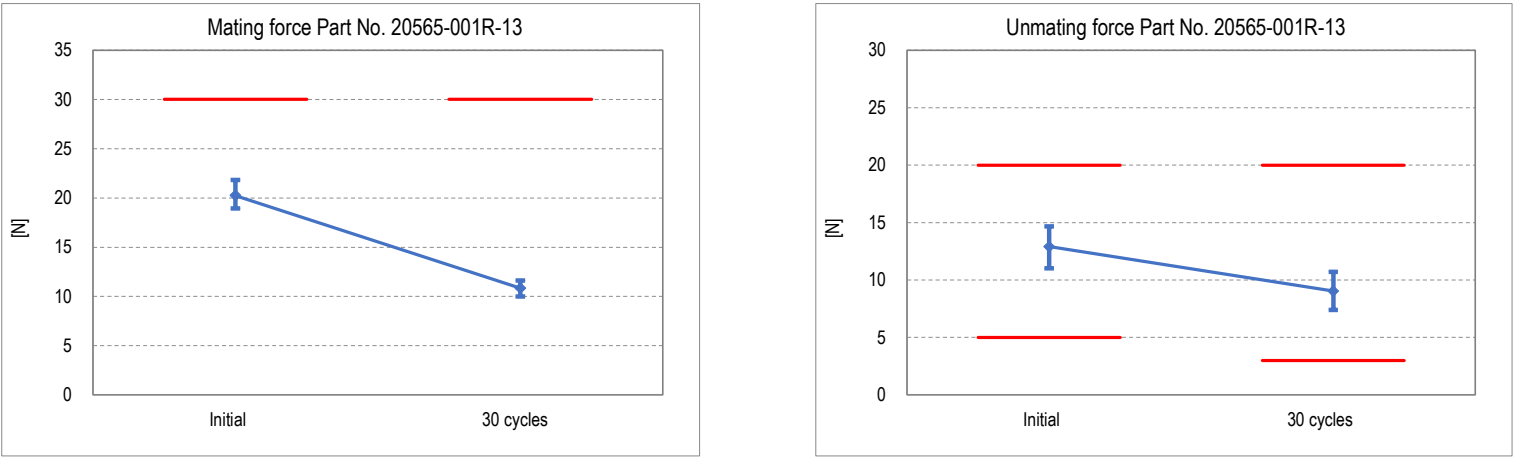



Graph 3

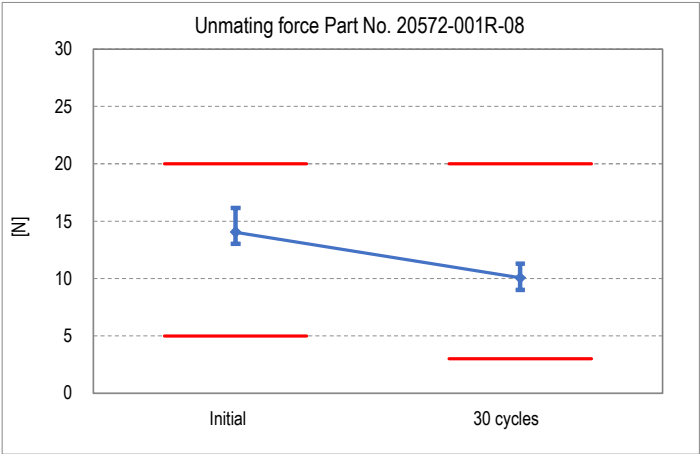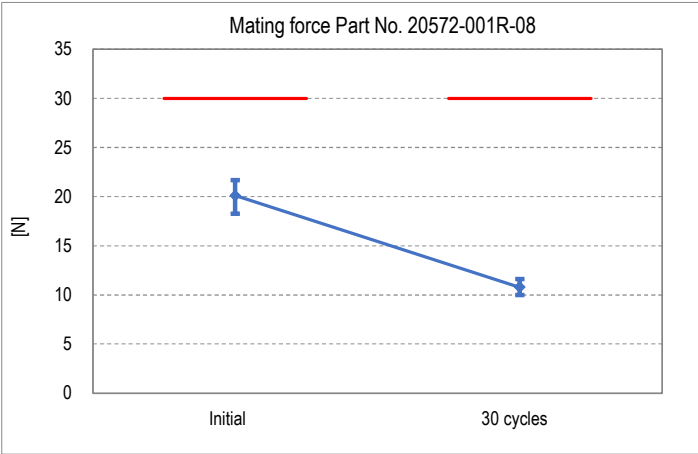



Graph 4

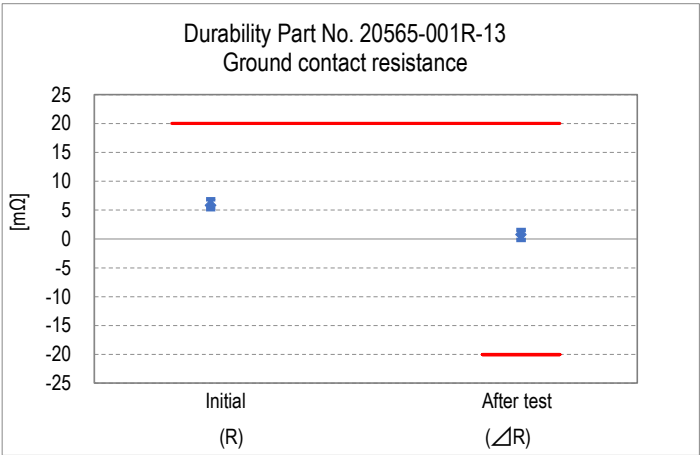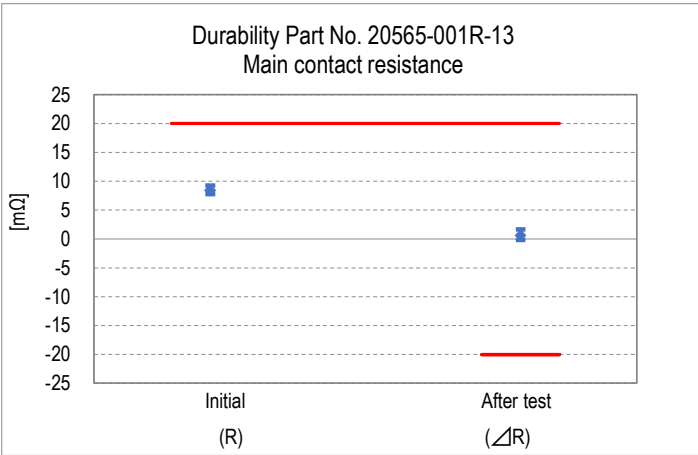



Graph 5

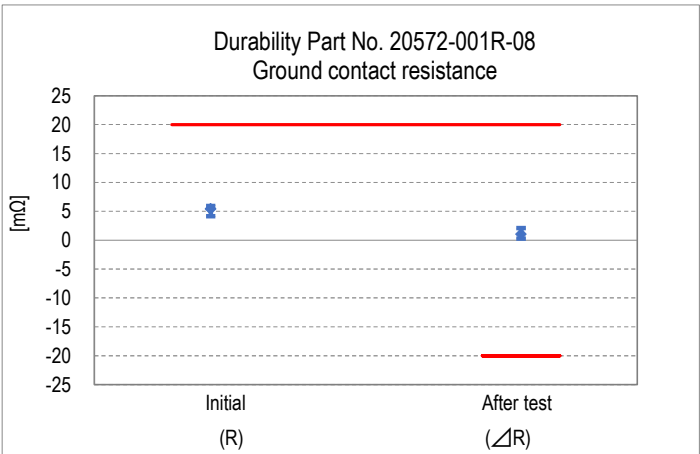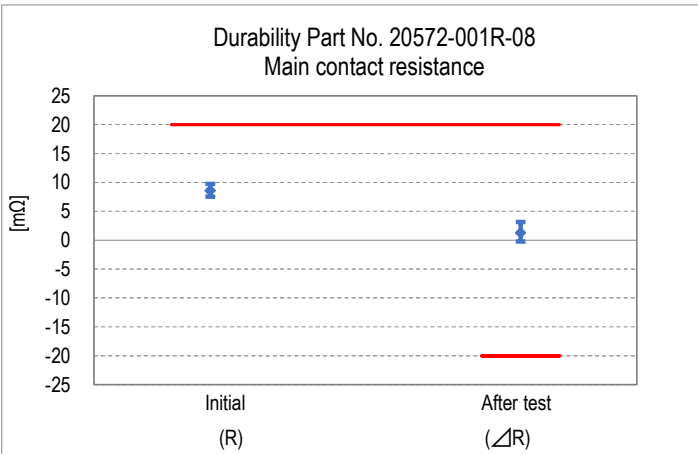



Graph 6

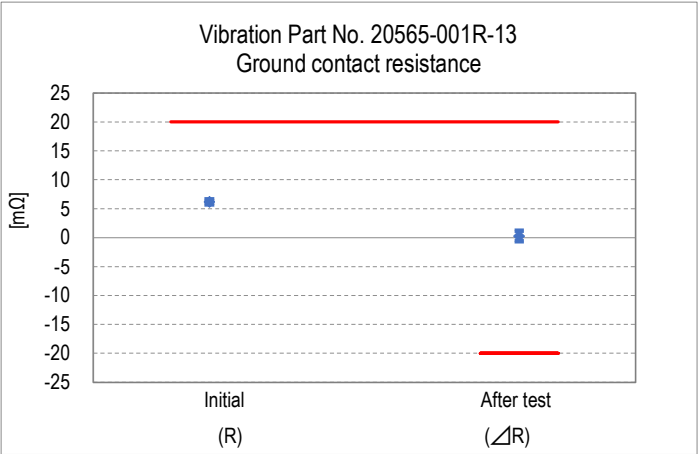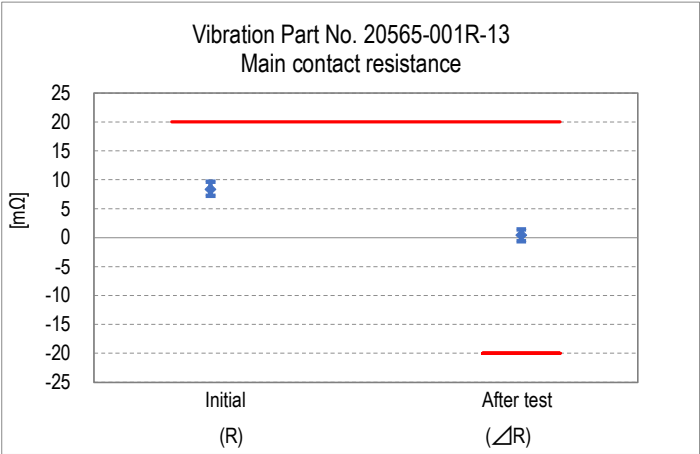



Graph 7

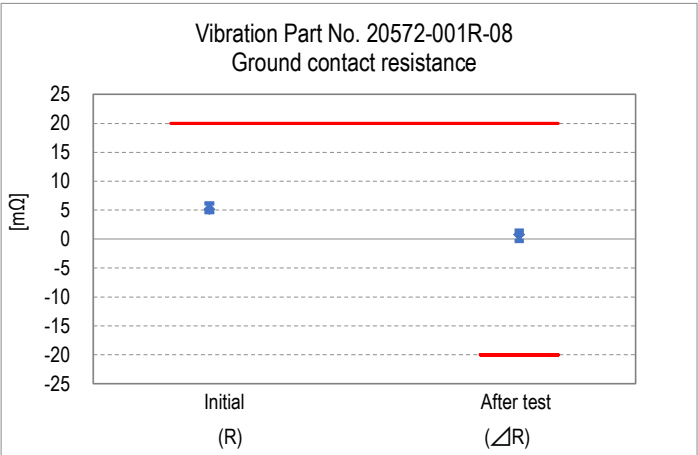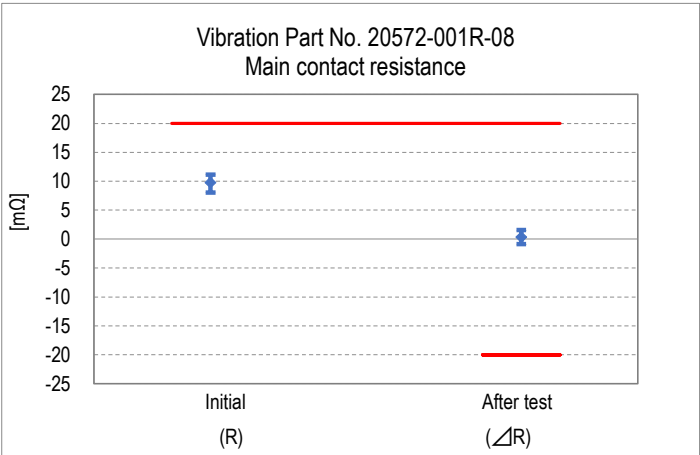



Graph 8

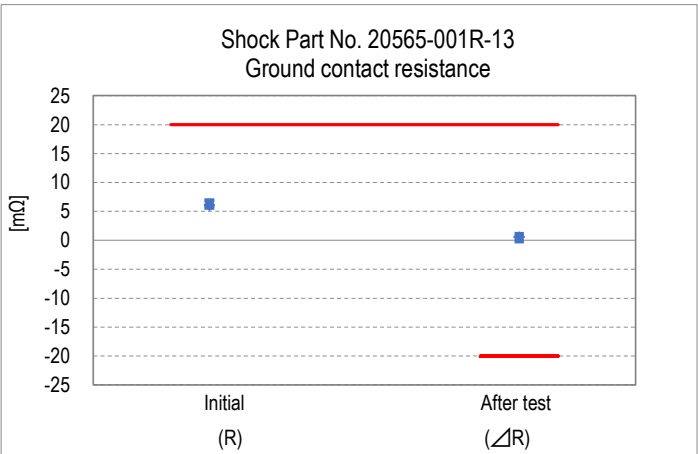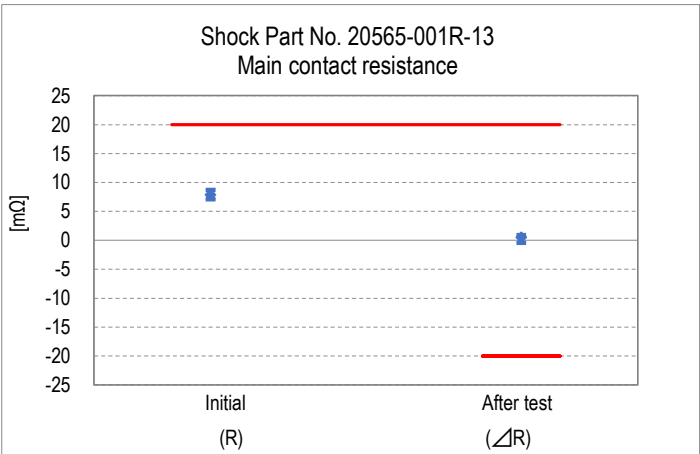



Graph 9

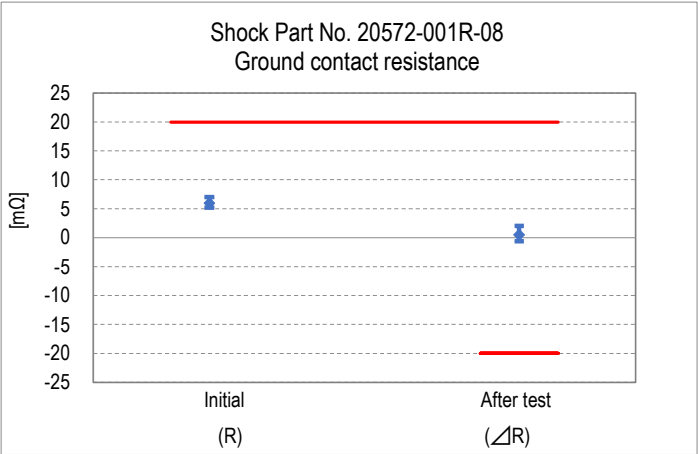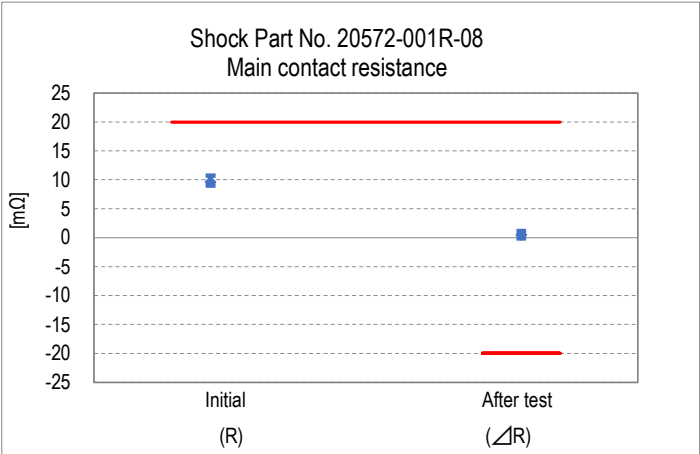


Graph 10

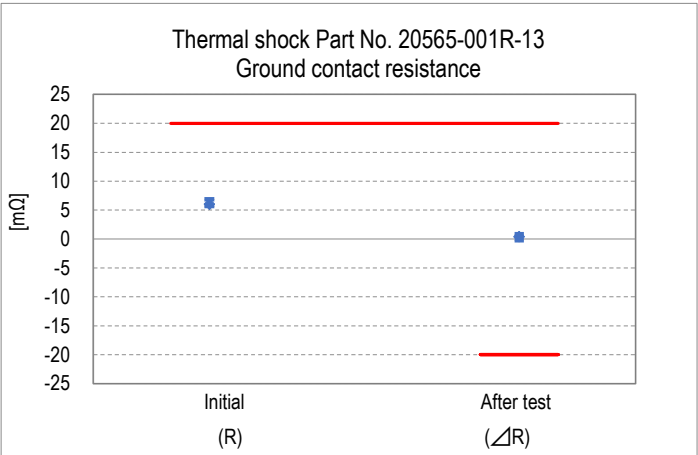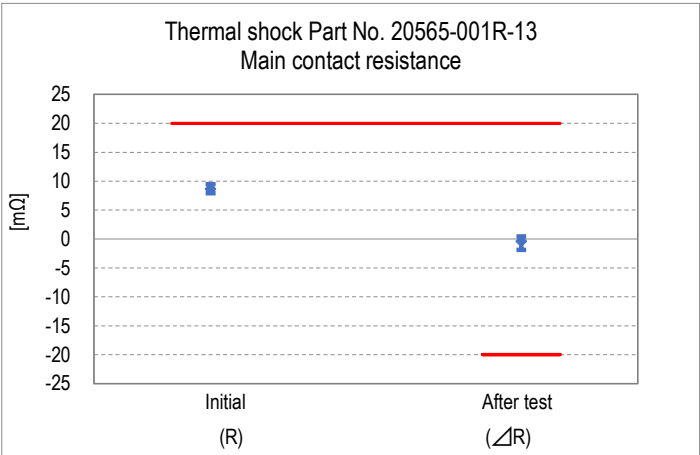



Graph 11

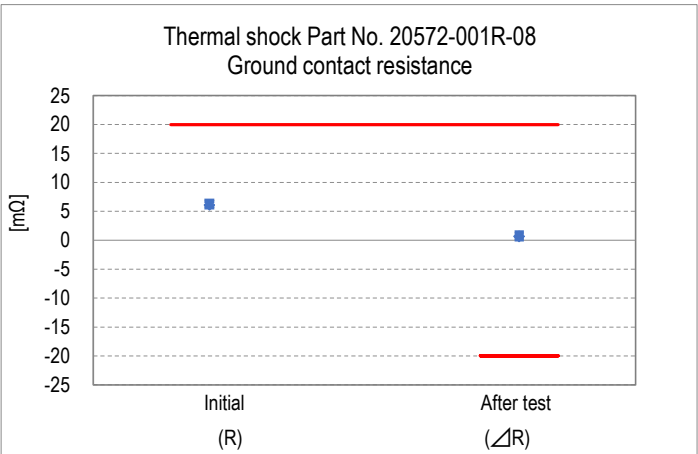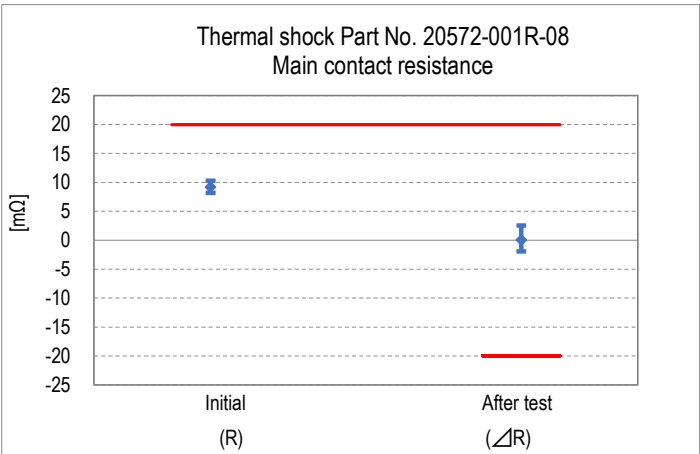



Graph 12

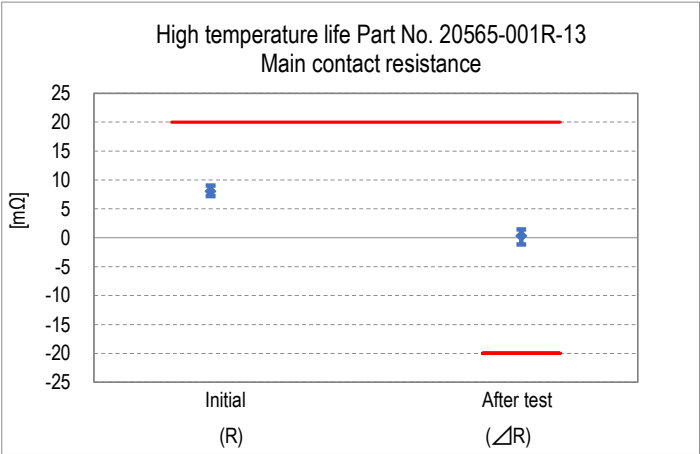


Graph 13

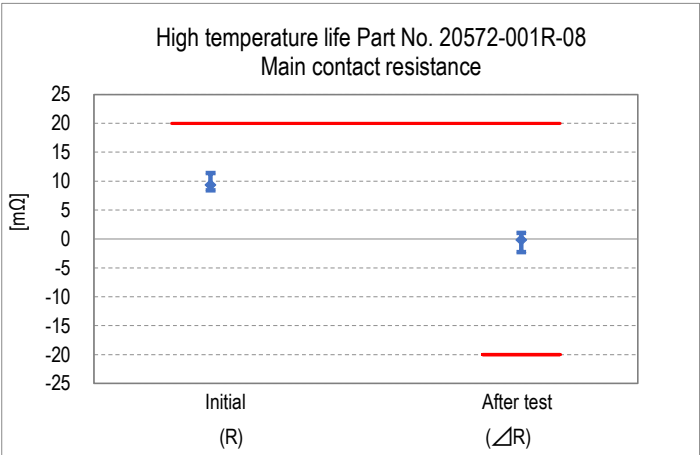
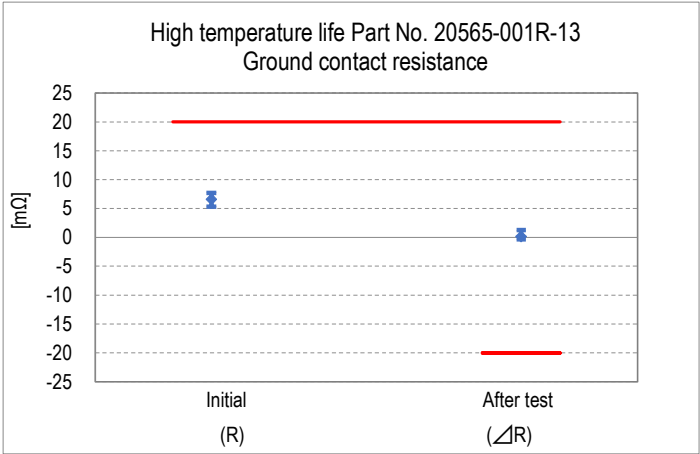


Graph 14

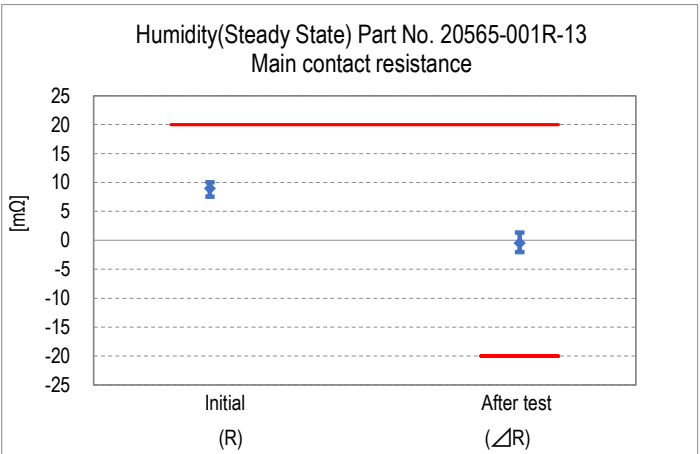
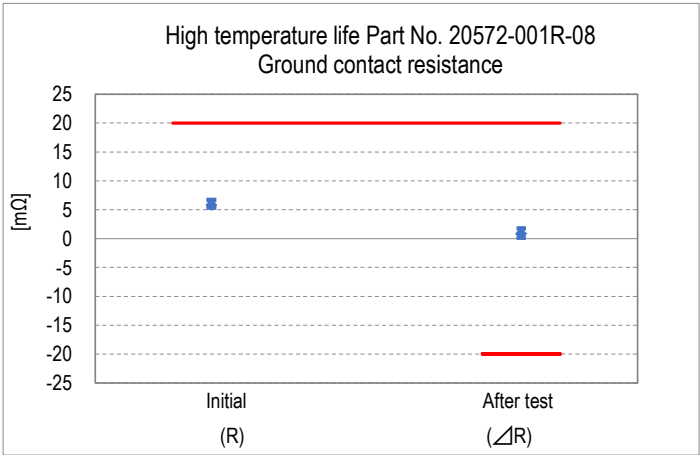


Graph 15


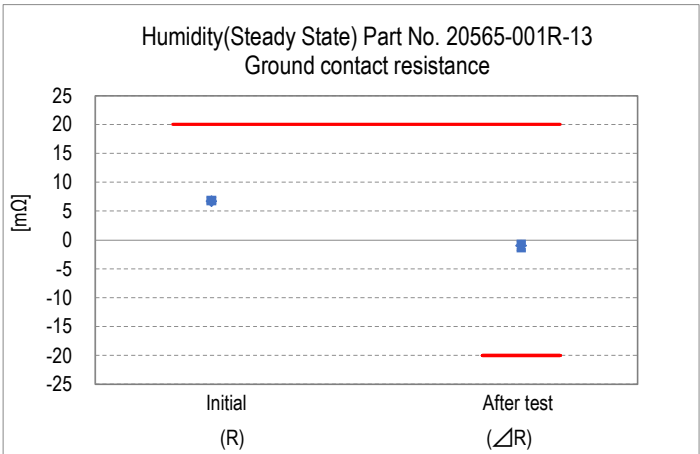


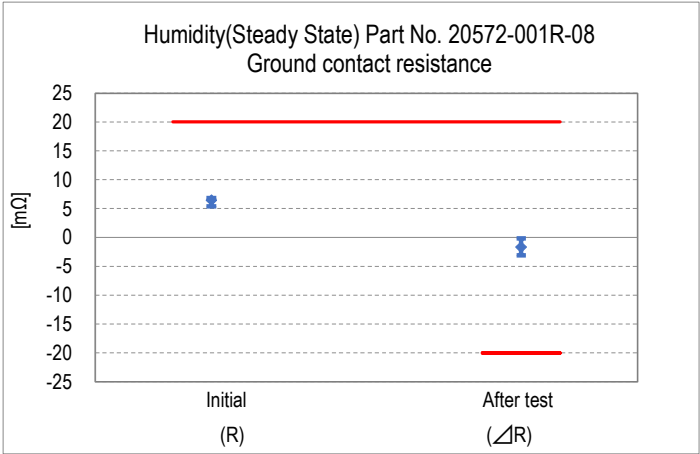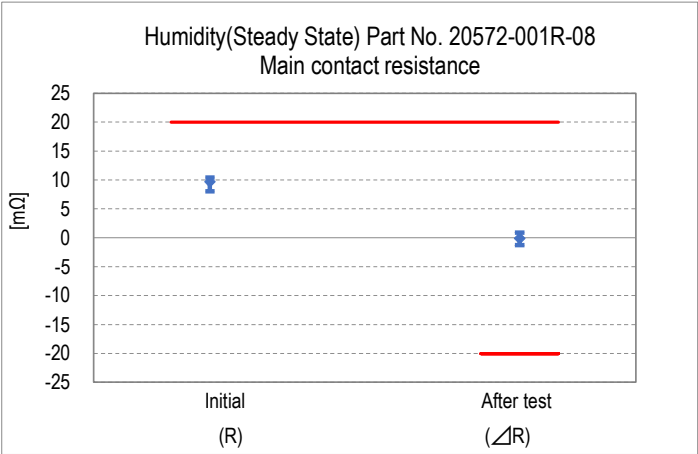



Graph 16

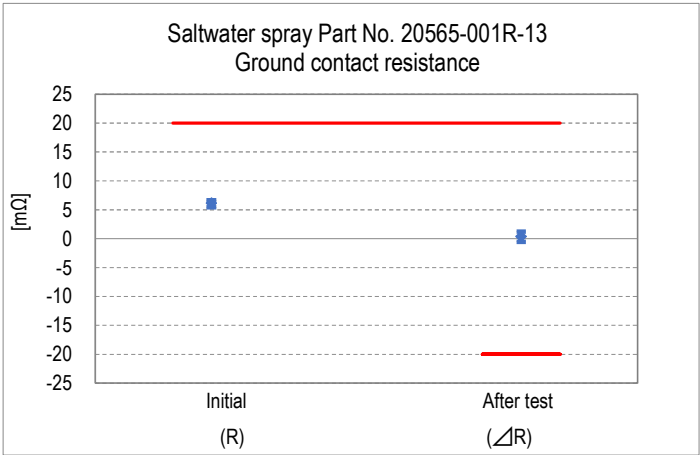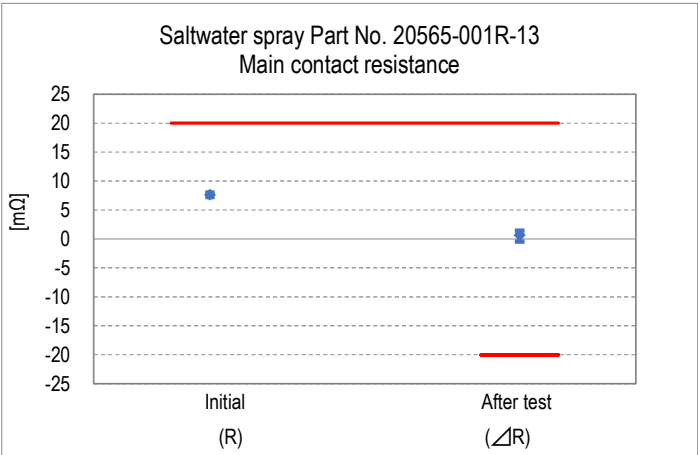



Graph 17

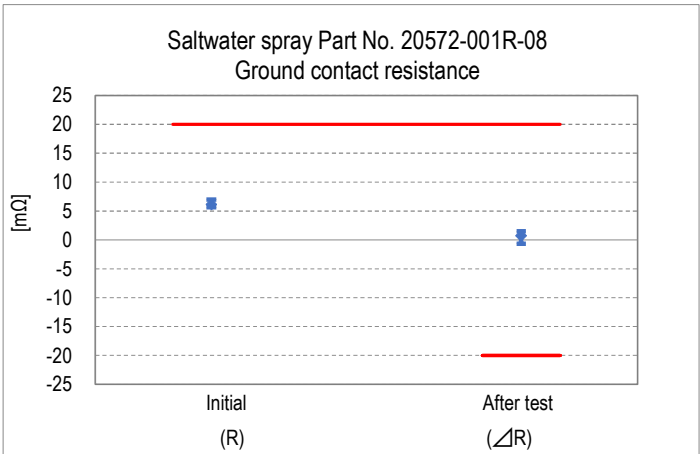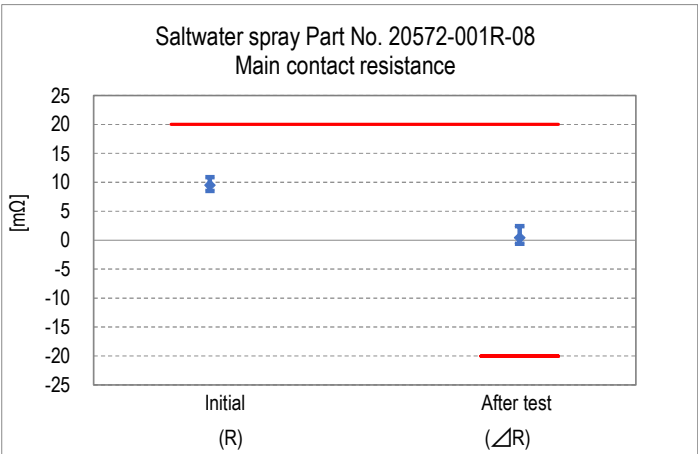

Graph 18

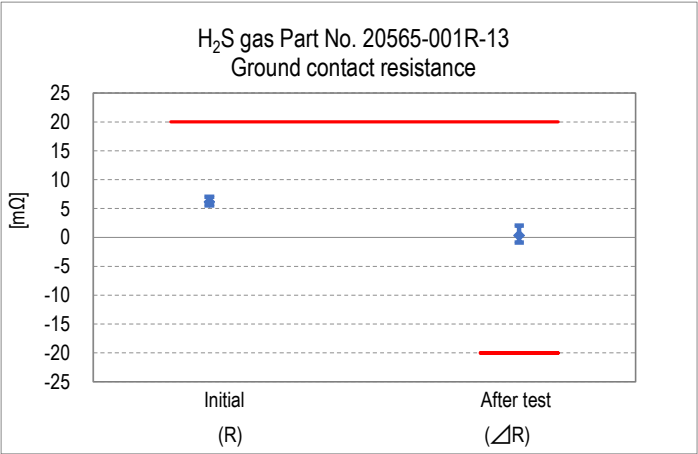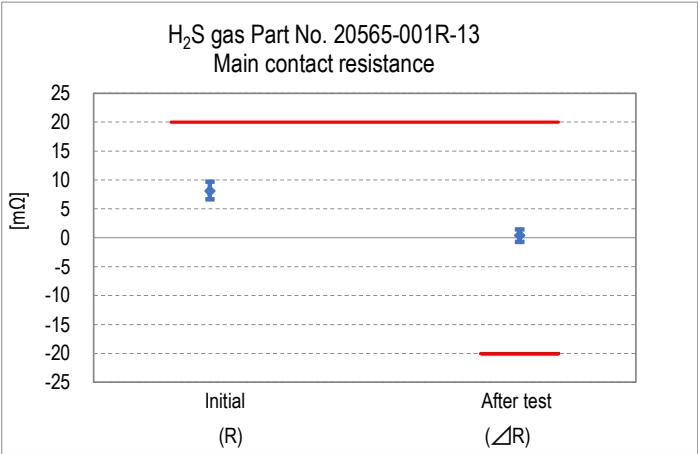

Graph 19

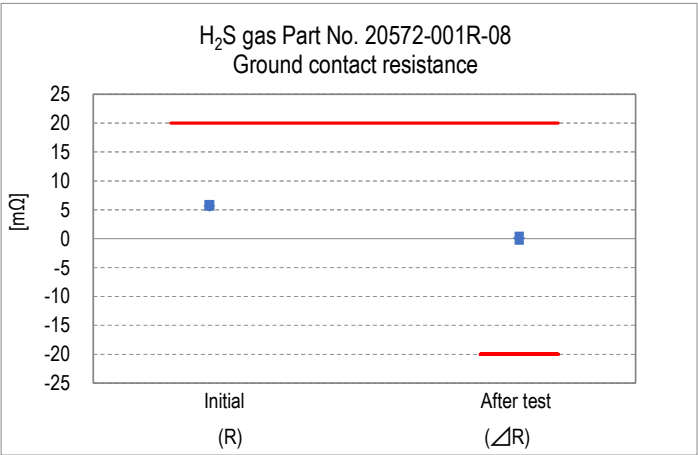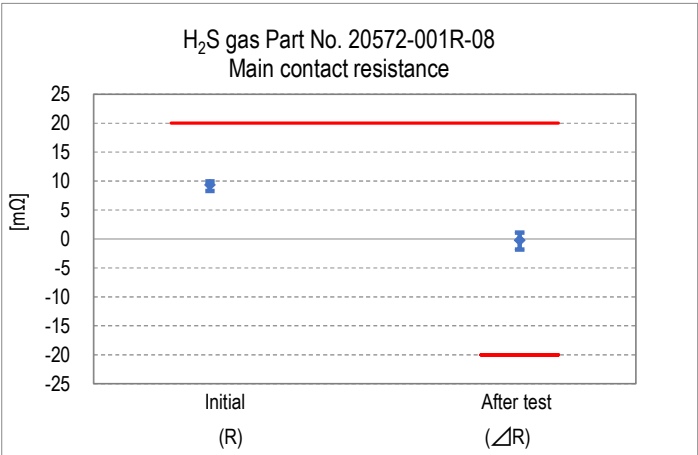

Graph 20