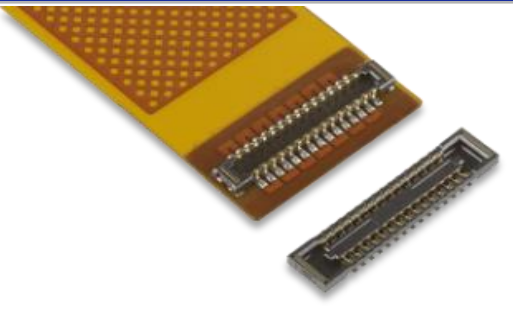
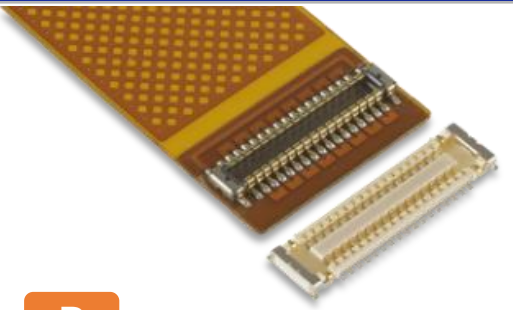
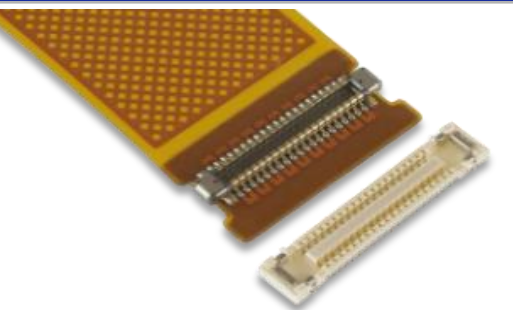



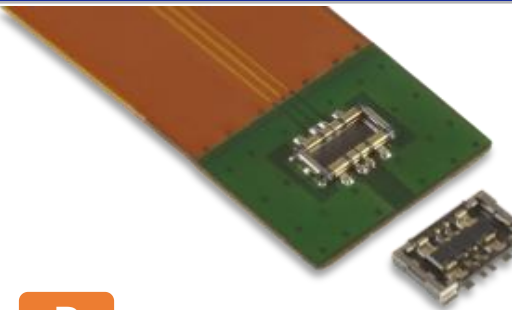


Board-to-Board (FPC) Connector

Click the photos below to get more detailed product information.
(except NOVASTACK 35-V)

Product name		NOVASTACK® 4	NOVASTACK® 35-P	NOVASTACK® 35-V	NOVASTACK® 35-HDP	NOVASTACK® 35-HDN	NOVASTACK® 35-PH	NOVASTACK® -B	
Feature			 P		 ZenShield™ P	 ZenShield™	 P	 P	
		Smallest size in 0.4 mm pitch	Signal and power hybrid	Visual mating	High-speed (20+ Gbps) Fully-shielded High power	High-frequency (-15 GHz) High-speed (20+G bps) Fully-shielded	Authentic high profile design with power pin	High power (6 A x 4 pins)	
Receptacle P/N		20642-0**E	20709-0**E-**	20664-1**E-01	20698-0**E-01*	20865-0**E-**	20843-0**E-21	20713-004E-0*	
Plug P/N		20641-0**E	20708-0**E-**	20663-1**E-01	20697-0**E-01*	20864-0**E-**	20842-0**E-21	20712-004E-0*	
Pitch (mm)		0.4	0.35	0.35	0.35	0.35	0.35	0.4(signal), 1.7(power)	
Pin count	Range	6 - 80	10 - 80 (signal) + 2 (power)	10 - 80	6 - 76 (signal) + 4 (power)	10 - 60	10 - 50 (signal) + 2 (power)	2 - 4 (signal) + 4 (power)	
	Available	6, 10, 24, 30, 34, 40	10,14,18,20,24,30, 34,40,50,60	30	28,34,42,56,62/+4	10, 30	10,30,40,50/+2	4+4	
* Please inquire for pin counts not listed as available or outside of the pin count range.									
Mated Size (mm)	Stack height	0.6+/-0.1	0.7+/-0.1	0.7+/-0.1	0.7+/-0.05	0.7+/-0.05	1.5+/-0.06	0.6+/-0.1	
	Width formula	2.50+(0.4*?p/2)	2.17+(0.35*?p/2)	3.56+(0.35*?p/2)	4.89+(0.35*?p/2)	4.15(10P) 7.90 (30P)	2.65+(0.35*?p/2)	3.20+(0.4*?p/2)	
	Depth	1.88	2.3	2.1	3.7	2.15	2.8	2.6	
Current rating	Signal pin	0.3A/pin				1.0A / pin (Max. 10P) (12pin and over : 12.0 A AC/DC (Total))		0.3A/pin	1.0A/pin
	Power pin	-	2.0A/pin x 2	-	2.2A/pin x 4	-	3.0A/pin x 2	6.0A/pin x 4	

Appendix : I-PEX Connectors Series



Click icon below to see latest product information



MHF[®]



High-Frequency
Micro **RF**
Connectors



CABLINE[®]
FPL[®]



High-Speed
Micro-Coaxial
Connectors



NOVASTACK[®]



High-Density
Board-to-Board
Connectors



EVAFLEX[®]
MINIFLEX[®]



High-Density
FFC/FPC
Connectors



ISH[®]
IARPB[®]



High-Power
Wire-to-Board
Connectors



CUSTOM





I-PEX, MHF, CABLINE, NOVASTACK, EVAFLEX, MINIFLEX, ISH, IARPB, IASLP, ESTORQ, i-Fit and ISFIT are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update Information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation, medical equipment, safety equipment etc.).

Contact your sales representative for more detailed information. [i-pex.com]

I-PEX Inc.