


PART NO.	L (mm)
90577-0100	100 ⁺¹⁰ ₀
90577-0350	350 ⁺²⁰ ₀
90577-0750	750 ⁺³⁰ ₀



Halogen Free



RoHS Compliant

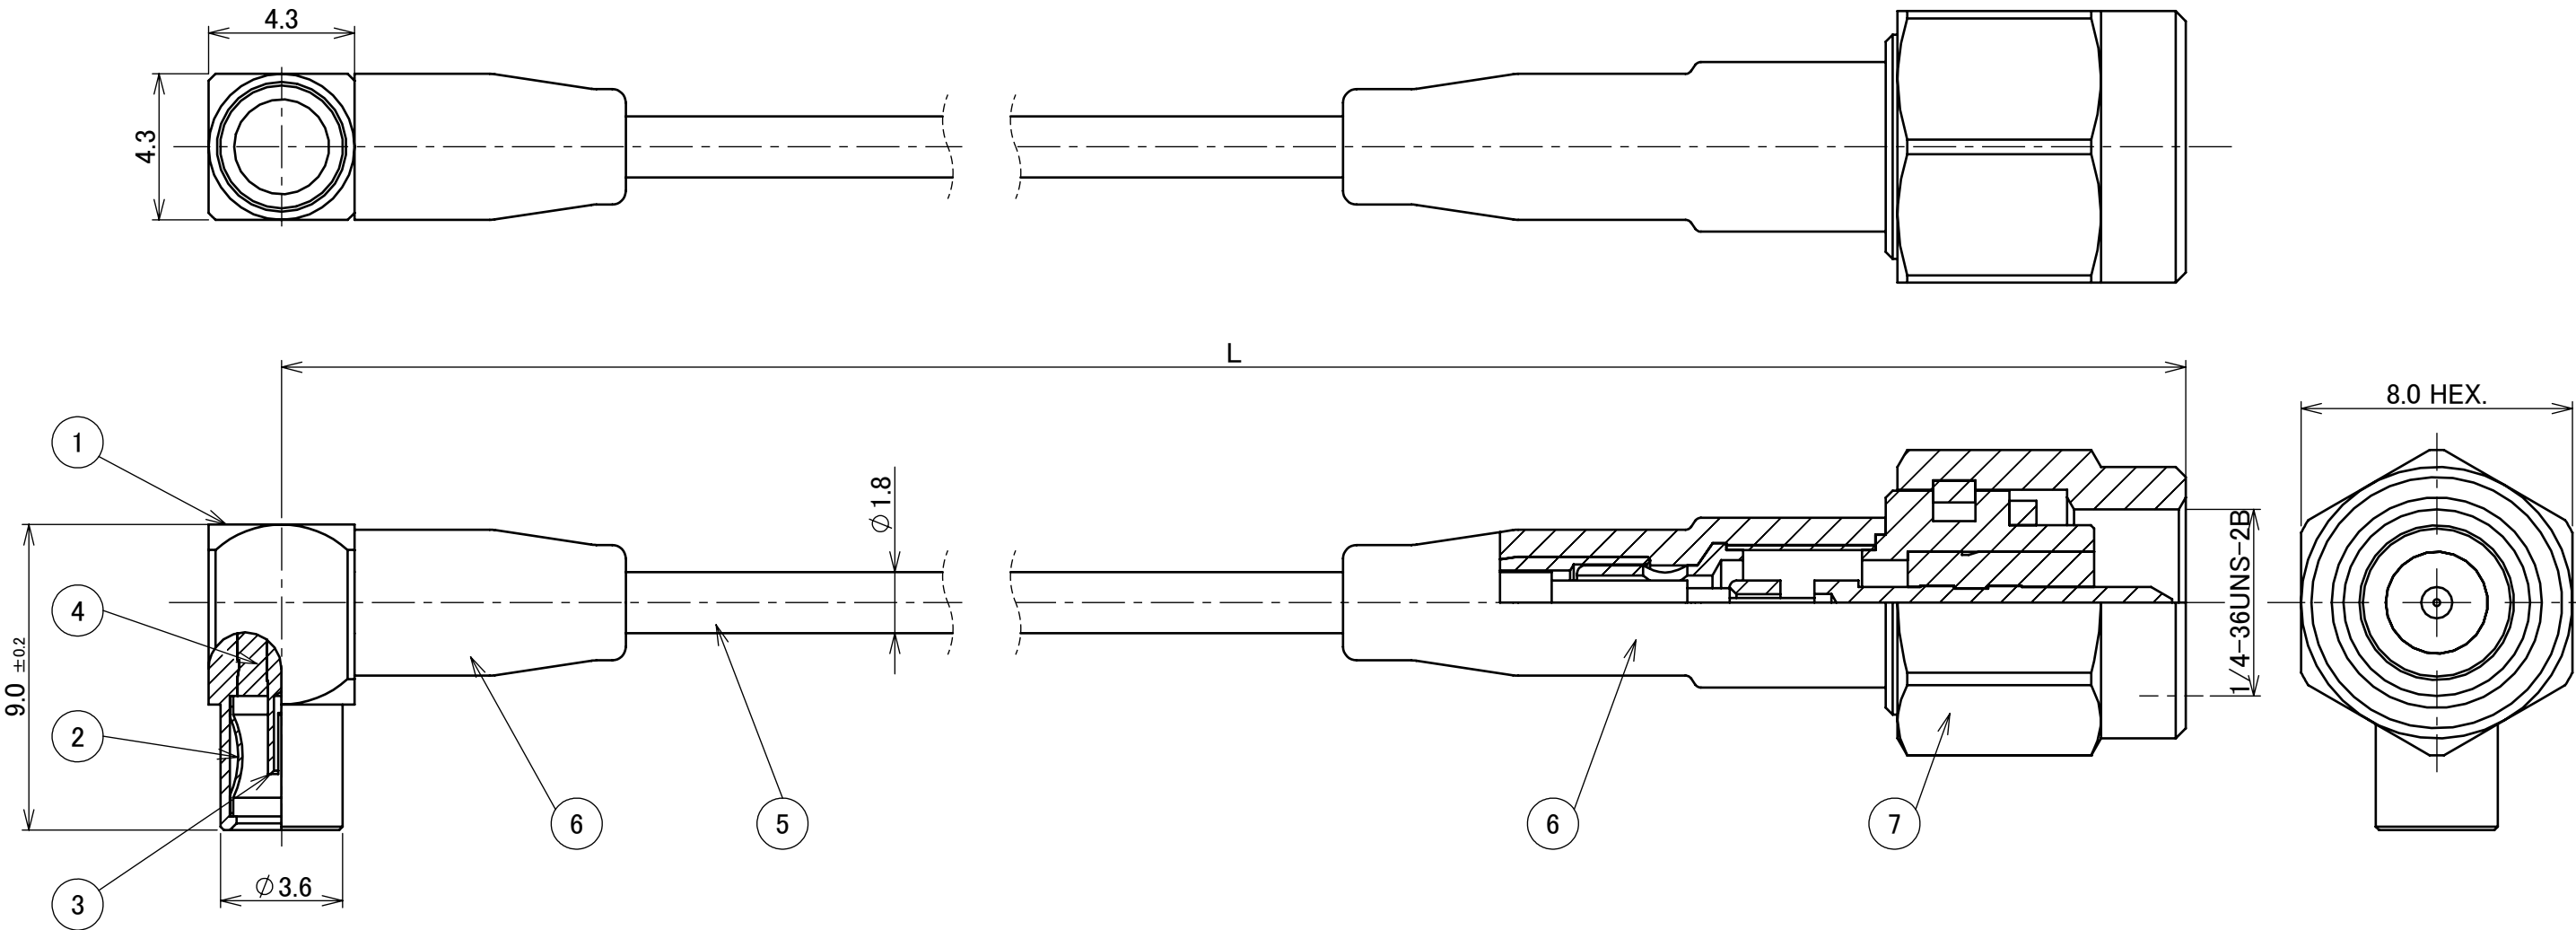

NOTES

1. APPLICATIONS

MHF RECEPTACLE HIGH CYCLE N45 C ADAPTER
(PART NO. 90575-0001)
MHF 4 RECEPTACLE HIGH CYCLE N45 C ADAPTER
(PART NO. 90576-0001)
MHF 5 RECEPTACLE HIGH CYCLE N45 C ADAPTER
(PART NO. 90847-0001)

7	SMA-PLUG	-	
6	HEAT SHRINKABLE TUBE	-	
5	COAXIAL CABLE	-	BROWN
4	INSULATOR	PTFE	
3	SOCKET CONTACT	BERYLLIUM COPPER	ALL OVER Ni Au 0.8 μm MIN.
2	DRUM SPRING	BERYLLIUM COPPER	Au 0.3 μm
1	SHELL	BRASS	Ni 1.0 μm MIN.
NO.	DESCRIPTION	MATERIAL	FINISH , REMARKS
11	Z231185	H.T	2023/09/28
10	Z211527	K.W	2021/12/13
9	Z190618	K.I	2019/05/08
8	Z190283	Y.I	2019/02/27
7	Z151404	Yufu	2015/12/08
6	Z131027	S.H	2013/11/11
REV.	ECN	BY	DATE
REVISION RECORD			
E.Kawabe			
ANGLE ±2° 6 OVER 30 MAX. ±0.3			
6 MAX. ±0.2 30 OVER 120 MAX. ±0.5			
GENERAL TOLERANCE.			
DWG. K.Nisiyama DATE 2012/03/12			
CHK.			
APP.			
DWG. No. 90577			
TITLE MHF® SERIES N45 C TO SMA ADAPTER CABLE			
PROJECTION			
SERIES No. R1			
CUSTOMER COPY			
SCALE 5:1			
UNIT mm			
I-PEX			
SIZE A3			
SHEET 1/3			
REV. 11			



PART NO.	L (mm)
90577-J100	100 ⁺¹⁰ ₀
90577-J150	150 ⁺¹⁰ ₀



Halogen Free



RoHS Compliant

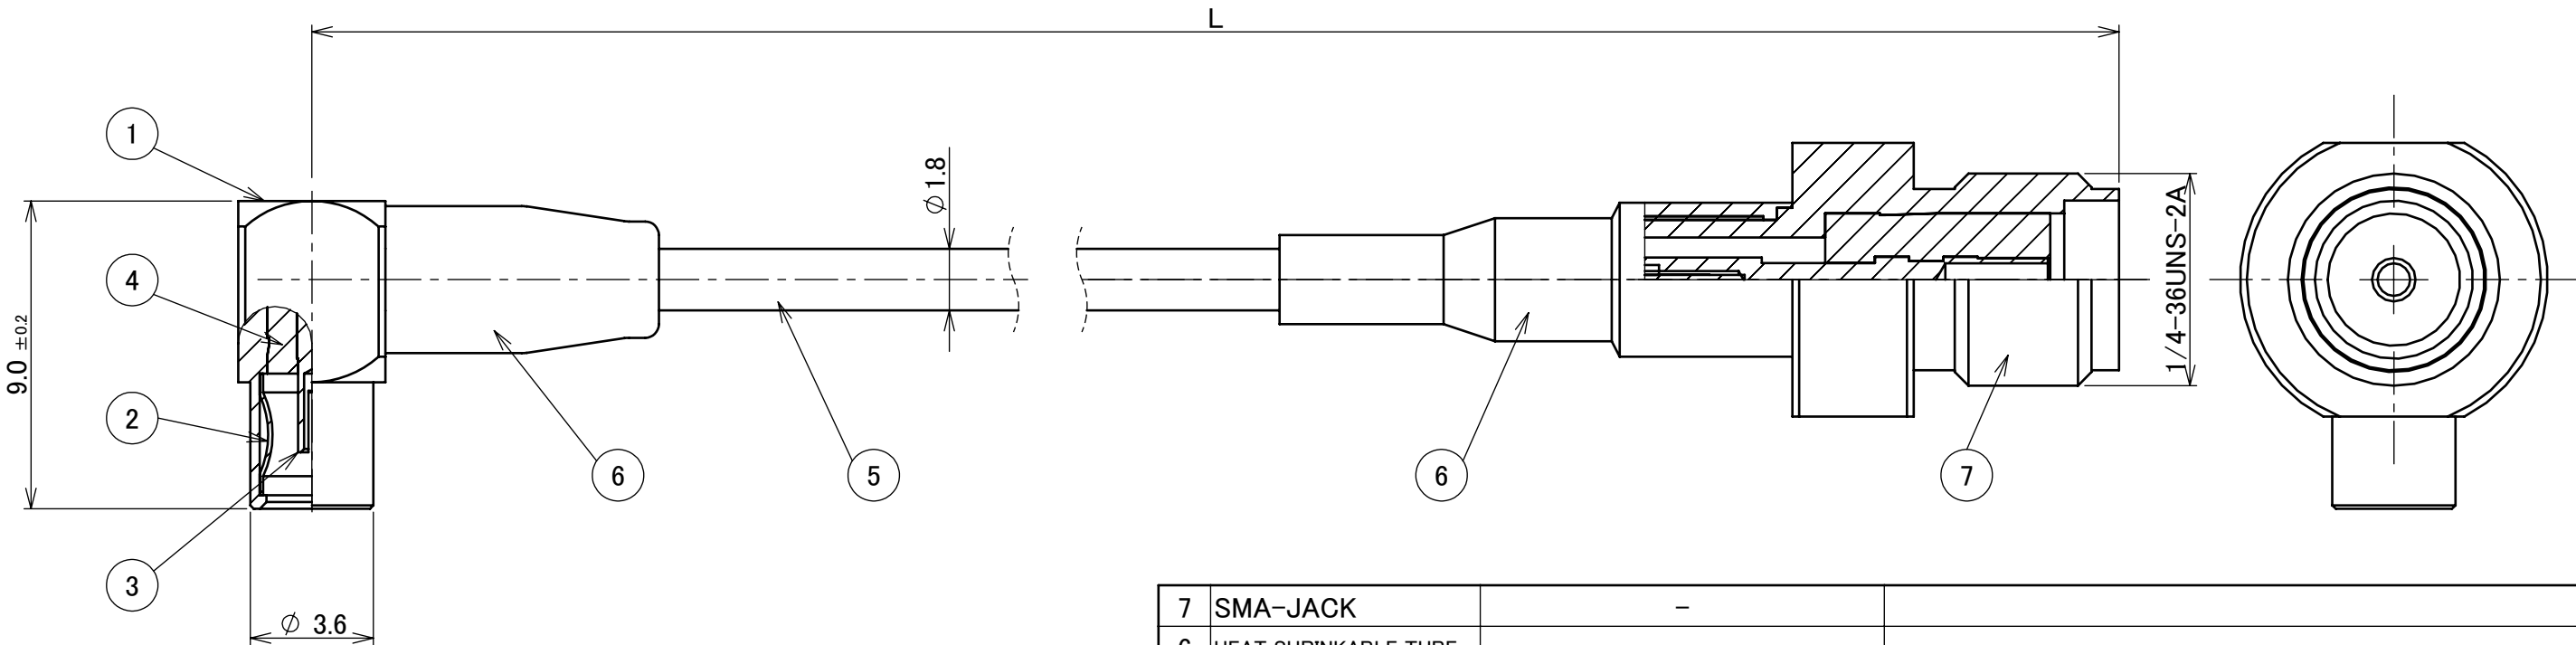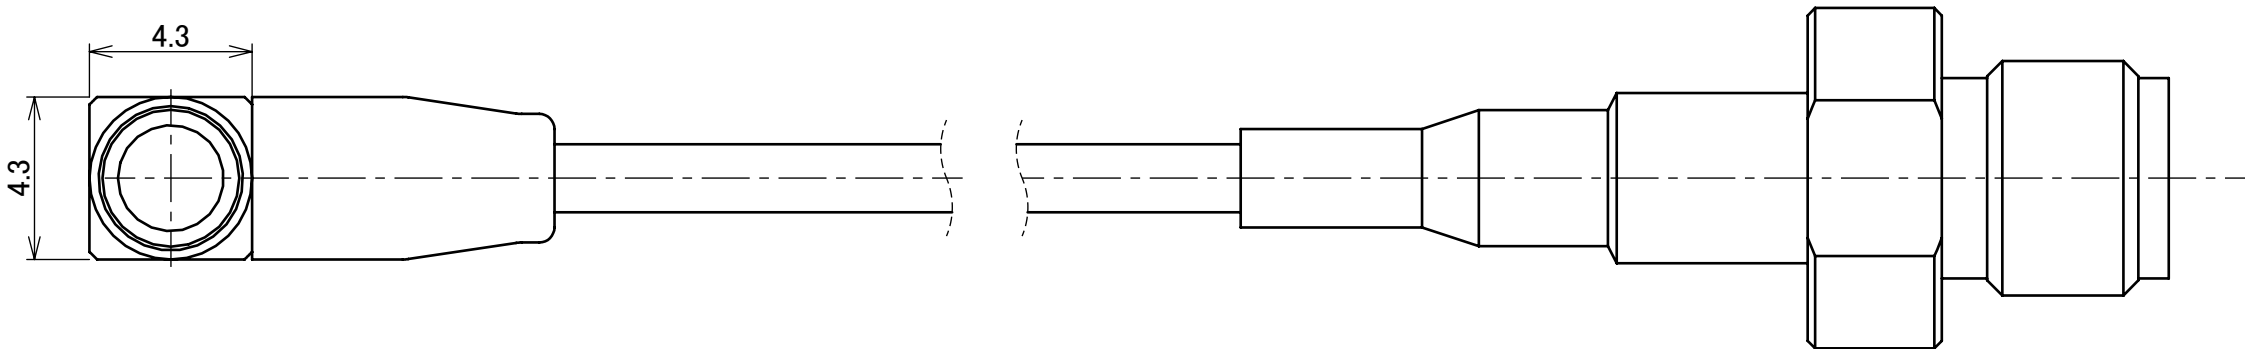

7	SMA-JACK	-	
6	HEAT SHRINKABLE TUBE	-	
5	COAXIAL CABLE	-	BROWN
4	INSULATOR	PTFE	
3	SOCKET CONTACT	BERYLLIUM COPPER	ALL OVER Ni Au 0.8 μ m MIN.
2	DRUM SPRING	BERYLLIUM COPPER	Au 0.3 μ m
1	SHELL	BRASS	Ni 1.0 μ m MIN.
NO.	DESCRIPTION	MATERIAL	FINISH , REMARKS

NOTES

1. APPLICATIONS

- MHF RECEPTACLE HIGH CYCLE N45 C ADAPTER
(PART NO. 90575-0001)
- MHF 4 RECEPTACLE HIGH CYCLE N45 C ADAPTER
(PART NO. 90576-0001)
- MHF 5 RECEPTACLE HIGH CYCLE N45 C ADAPTER
(PART NO. 90847-0001)

					ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION 	SERIES No.	CUSTOMER COPY				
					6 MAX.	±0.2	30 OVER 120 MAX.	±0.5		R1					
					GENERAL TOLERANCE.				TITLE MHF® SERIES N45 C TO SMA ADAPTER CABLE				SCALE	I-PEX	
					DWG.	DATE							5:1		
CHK.								UNIT							
REV.	ECN	BY	DATE	APP.	APP.	DWG. No. 90577				mm	SIZE	SHEET	REV.		
REVISION RECORD										A3	2/3	11			

ITEMS	SPECIFICATION
APPLICATION (REPRESENTATIVE)	MHF I RECEPTACLE HIGH CYCLE N45 C ADAPTER (PART NO. 90575-0001) MHF 4 RECEPTACLE HIGH CYCLE N45 C ADAPTER (PART NO. 90576-0001) MHF 5 RECEPTACLE HIGH CYCLE N45 C ADAPTER (PART NO. 90847-0001)
OPERATING TEMPERATURE	243 ~ 343 K (-40°C~+70°C)
OPERATING HUMIDITY	85% MAX.(NON-CONDENSING)
SPEC	MHF I : SEE DWG No.90575 MHF 4 : SEE DWG No.90576 MHF 5 : SEE DWG No.90847
DURABILITY	100 CYCLES MAX.
PACKING STANDARD	PST-12054
APPEARANCE CRITERIA No.	QLS-A***

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION 	SERIES No. R1	CUSTOMER COPY		
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5					
GENERAL TOLERANCE.				TITLE MHF [®] SERIES N45 C TO SMA ADAPTER CABLE		SCALE	I-PEX	
DWG.	DATE					5:1		
CHK.						UNIT		
APP.						mm		
				DWG. No.		SIZE	SHEET	REV.
				90577		A3	3/3	11