










Recommended P/N 20698-0**E-01#

PART No.	SIGNAL POS.	POWER POS.	A	B	C	D
20698-028E-01	28P	4P	8.95	6.54	5.60	4.55
20698-034E-01	34P	4P	10.00	7.59	6.65	5.60
20698-042E-01#	42P	4P	11.40	8.99	8.05	7.00
20698-056E-01#	56P	4P	13.85	11.44	10.50	9.45
20698-062E-01#	62P	4P	14.90	12.49	11.55	10.50

20698-0**E-01M

WITHOUT : 10,000 pcs/REEL
WITH : 5,000 pcs/REEL

Pos.

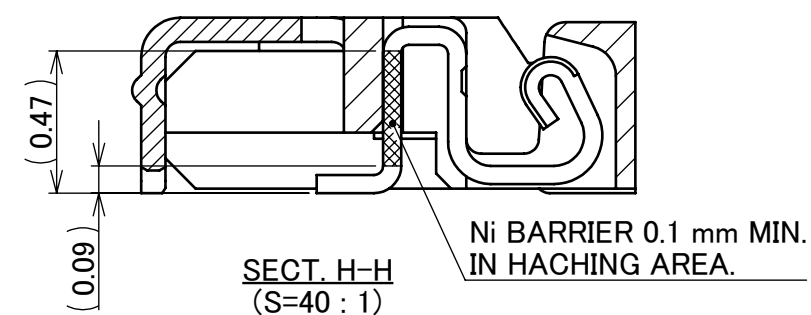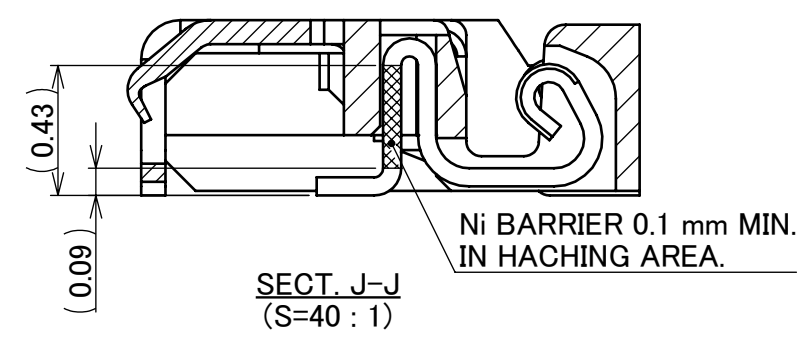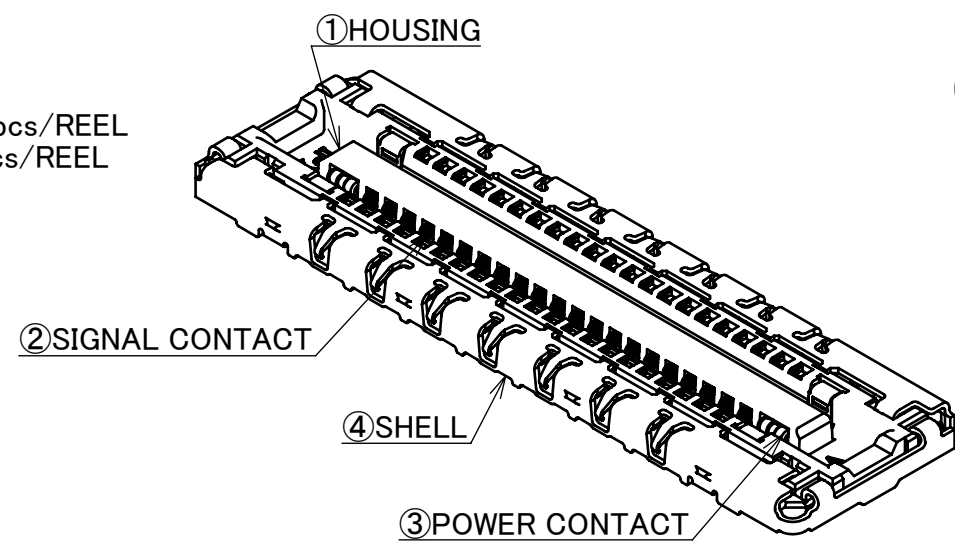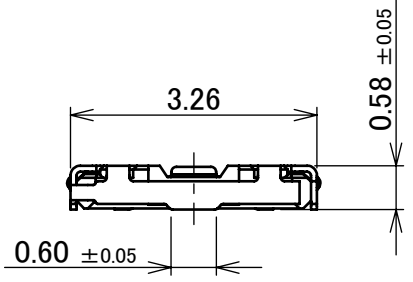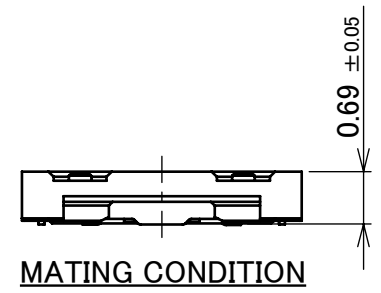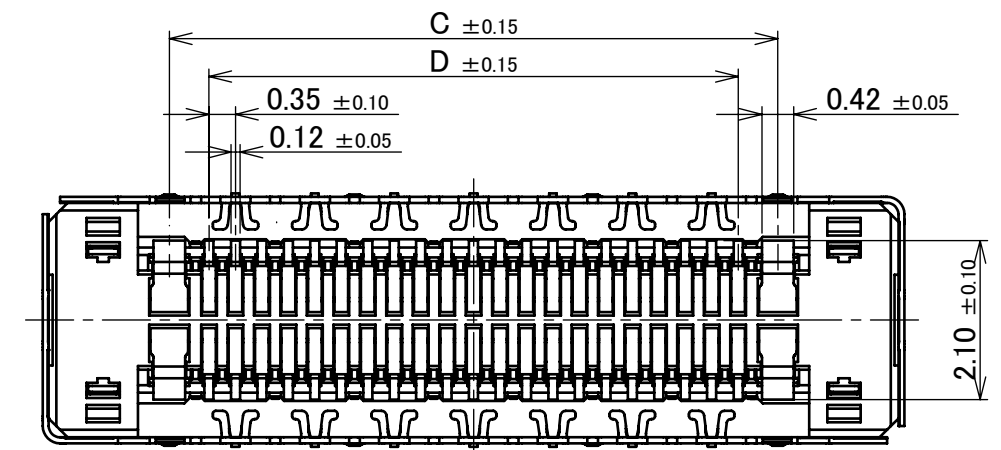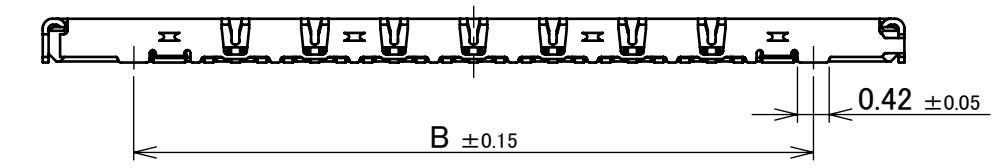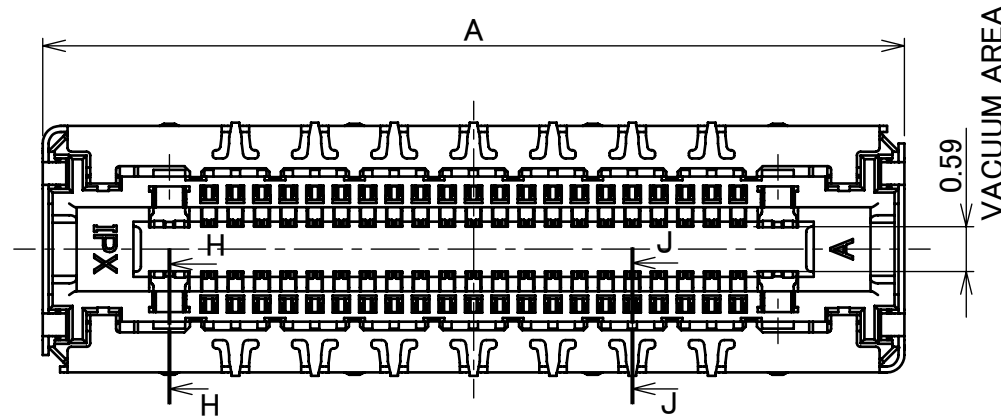

NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS
4	SHELL	PHOSPHOR BRONZE	ALL OVER Ni 1.27 μ m MIN. Au 0.01 μ m MIN.
3	POWER CONTACT	CORSON ALLOY	ALL OVER Ni 1.27 μ m MIN. CONTACT PART Au 0.05 μ m MIN. SOLDERING PART Au 0.02 μ m MIN.
2	SIGNAL CONTACT	CORSON ALLOY	ALL OVER Ni 1.27 μ m MIN. CONTACT PART Au 0.10 μ m MIN. SOLDERING PART Au 0.02 μ m MIN.
1	HOUSING	LCP	UL94V-0, BLACK






REV.	ECN	BY	DATE	APP.	APP.	DATE	DWG. No.	SIZE	SHEET	REV.
7	Z200541	Y.B	May/26/'20	T.Y	ANGLE	±2°	6 OVER 30 MAX.	±0.3		
6	Z180895	R.H	July/09/'18	TAK	6 MAX.	±0.2	30 OVER 120 MAX.	±0.5		
5	Z180170	T.K	Feb./09/'18	Y.S	GENERAL TOLERANCE.					
4	Z171521	M.N	Dec./27/'17	J.T	DWG.		DATE			
3	Z170662	T.K	June/06/'17	J.T	T.Kurachi		2016/01/13			
2	Z161153	T.K	Sept./15/'16	J.T	CHK.					
REV.	ECN	BY	DATE	APP.	APP.		DATE			
					J.Tateishi		2016/01/13			

PART No.	SIGNAL POS.	POWER POS.
20698-028E-01	28P	4P
20698-034E-01	34P	4P
20698-042E-01#	42P	4P
20698-056E-01#	56P	4P
20698-062E-01#	62P	4P

20698-0**E-01M

WITHOUT : 10,000 pcs/REEL
WITH : 5,000 pcs/REEL


Pos.

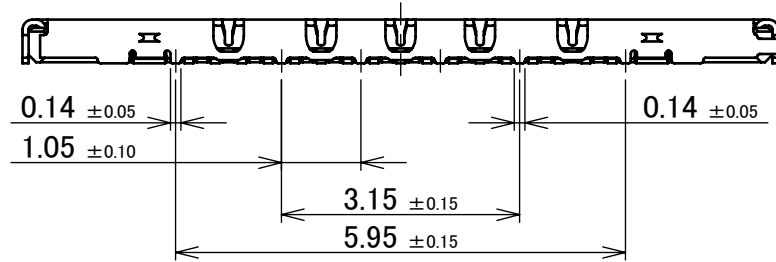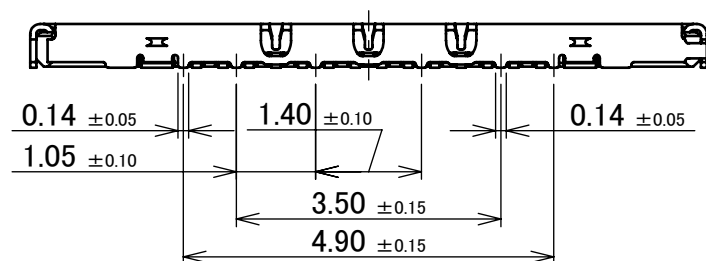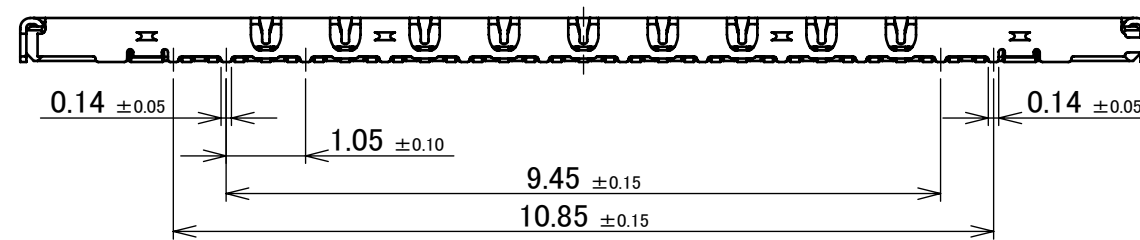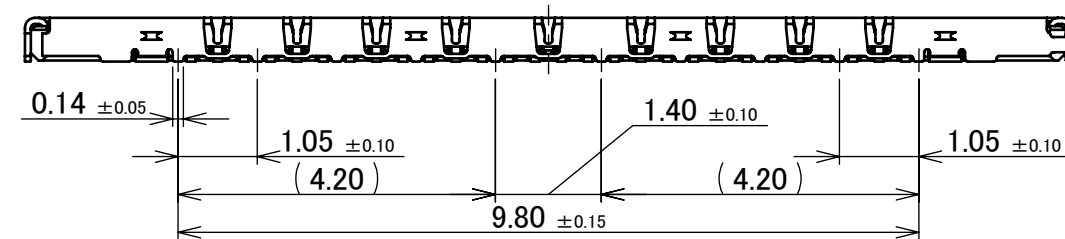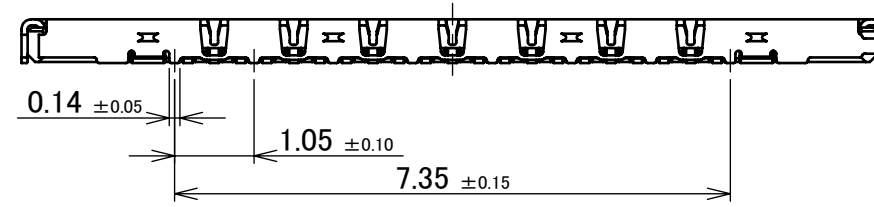


ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. R2	CUSTOMER COPY		
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5					
GENERAL TOLERANCE.				TITLE NOVASTACK® 35-HDP RECEPTACLE ASS'Y	SCALE 10:1	UNIT mm I-PEX		
DWG.	DATE							
CHK.								
APP.								
				DWG. No.	20698	SIZE A3	SHEET 2/8	REV. 7

ITEMS	SPECIFICATION
RATING VOLTAGE	60V AC (PER A CONTACT)
RATING AMPERAGE (FOR SIGNAL CONTACT)	0.3A AC/DC (PER A CONTACT)/ 12.0A AC/DC(TOTAL)
RATING AMPERAGE (FOR POWER CONTACT)	2.2A AC/DC (PER A CONTACT)/ 8.8A AC/DC(TOTAL)
OPERATING TEMPERATURE	233~358K(-40°C~+85°C)
OPERATING HUMIDITY	85% MAX.(NON-CONDENSING)
CONTACT RESISTANCE (FOR SIGNAL CONTACT)	INITIAL : 40mohm MAX. / AFTER TEST : \triangle 40mohm MAX.
CONTACT RESISTANCE (FOR POWER CONTACT)	INITIAL : 20mohm MAX. / AFTER TEST : \triangle 20mohm MAX.
CONTACT RESISTANCE (FOR GROUND)	INITIAL : 20mohm MAX. / AFTER TEST : \triangle 20mohm MAX.
INSULATION RESISTANCE	INITIAL : 1,000Mohm MIN. / AFTER TEST : 500Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC250V 1min
DURABILITY	30 CYCLES
MATING FORCE (INITIAL)	1.0N × n + 4.0N MAX.
UNMATING FORCE (AFTER TEST)	0.1N × n + 0.4N MIN.
COPLANARITY	0.08 MAX.
PRODUCT SPECIFICATION	PRS-2187
TEST REPORT	TR-16014
PACKING STANDARD	PST-15084 (10K/REEL) PST-16126 (5K/REEL)
INSTRUCTION MANUAL	HIM-15020
APPEARANCE CRITERIA No.	QLS-A***


ANGLE	$\pm 2^\circ$	6 OVER 30 MAX.	± 0.3	PROJECTION 	SERIES No. R2	CUSTOMER COPY
6 MAX.	± 0.2	30 OVER 120 MAX.	± 0.5			
GENERAL TOLERANCE.				TITLE NOVASTACK® 35-HDP RECEPTACLE ASS'Y	SCALE	
DWG.	DATE					
CHK.						
APP.						
				DWG. No.	20698	SIZE A3
				SHEET	3/8	REV. 7

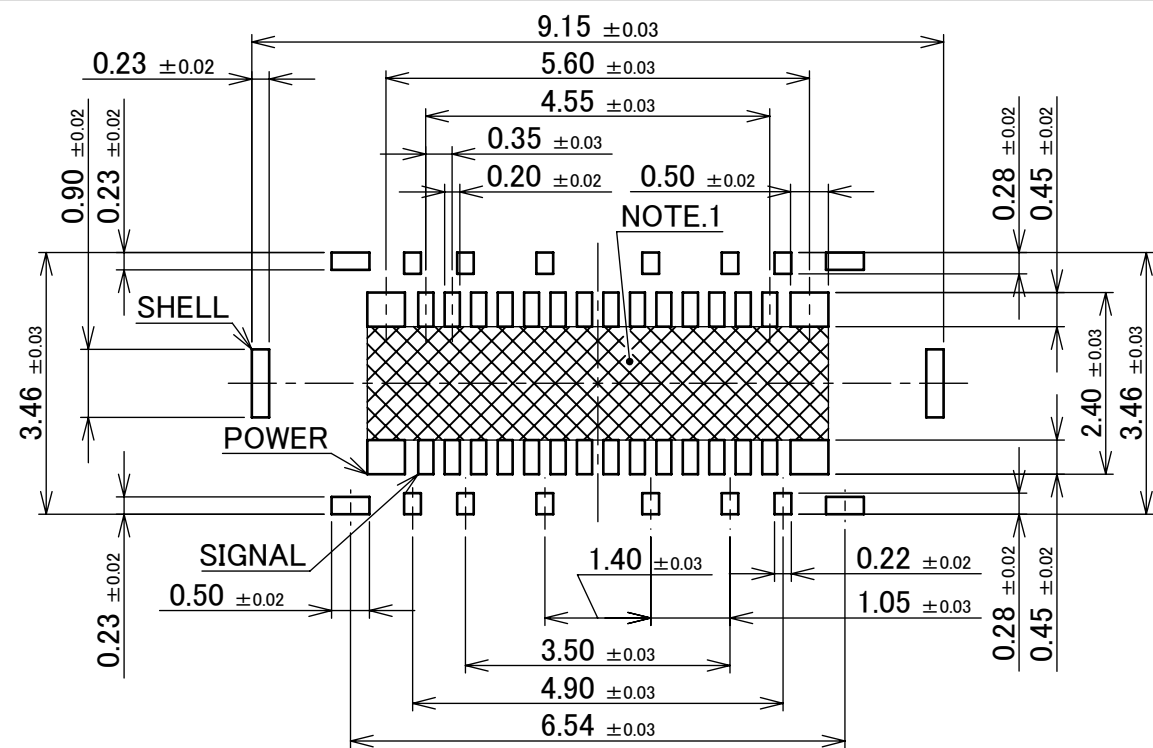

RECOMMENDED PATTERN LAYOUT (28P)

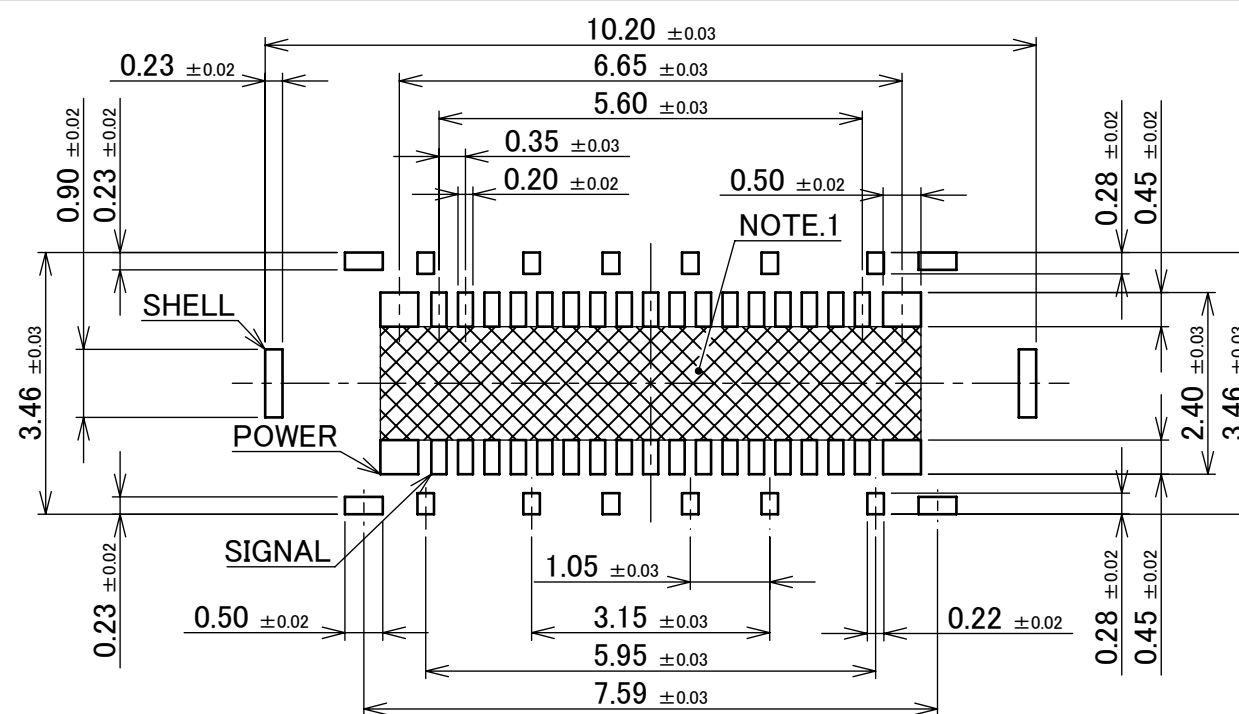


RECOMMENDED PATTERN LAYOUT (34P)

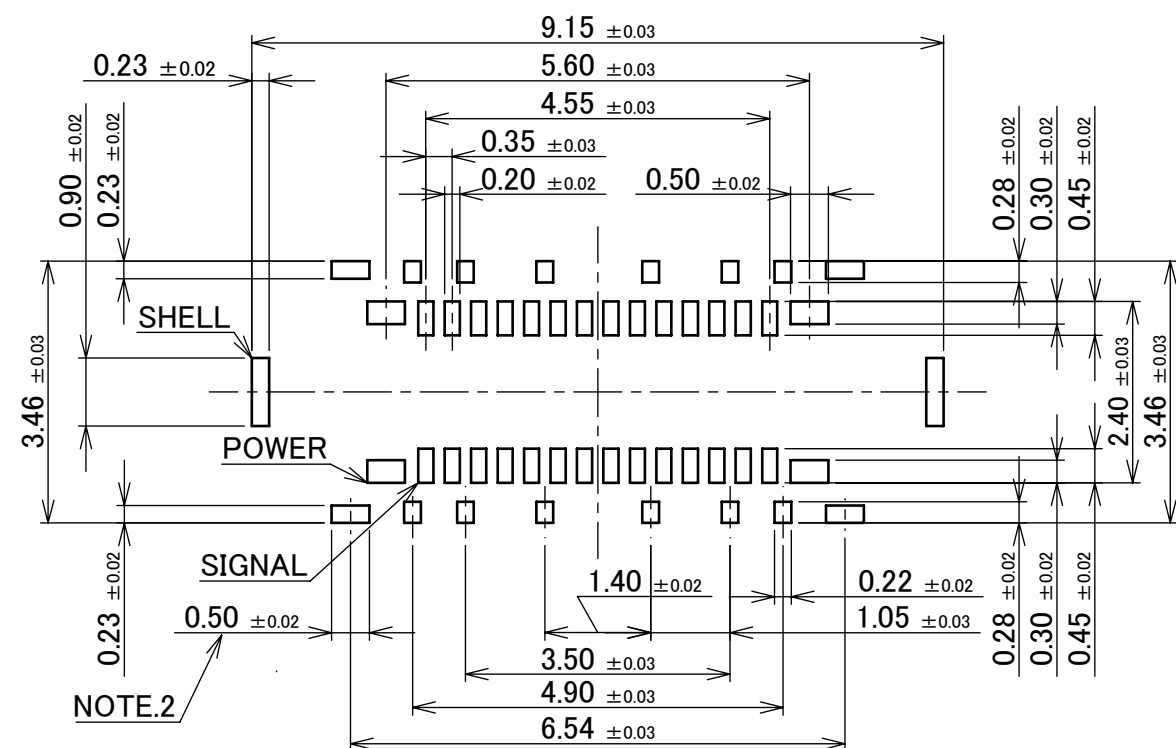

RECOMMENDED METAL MASK LAYOUT (28P)

THICKNESS : t=0.10mm

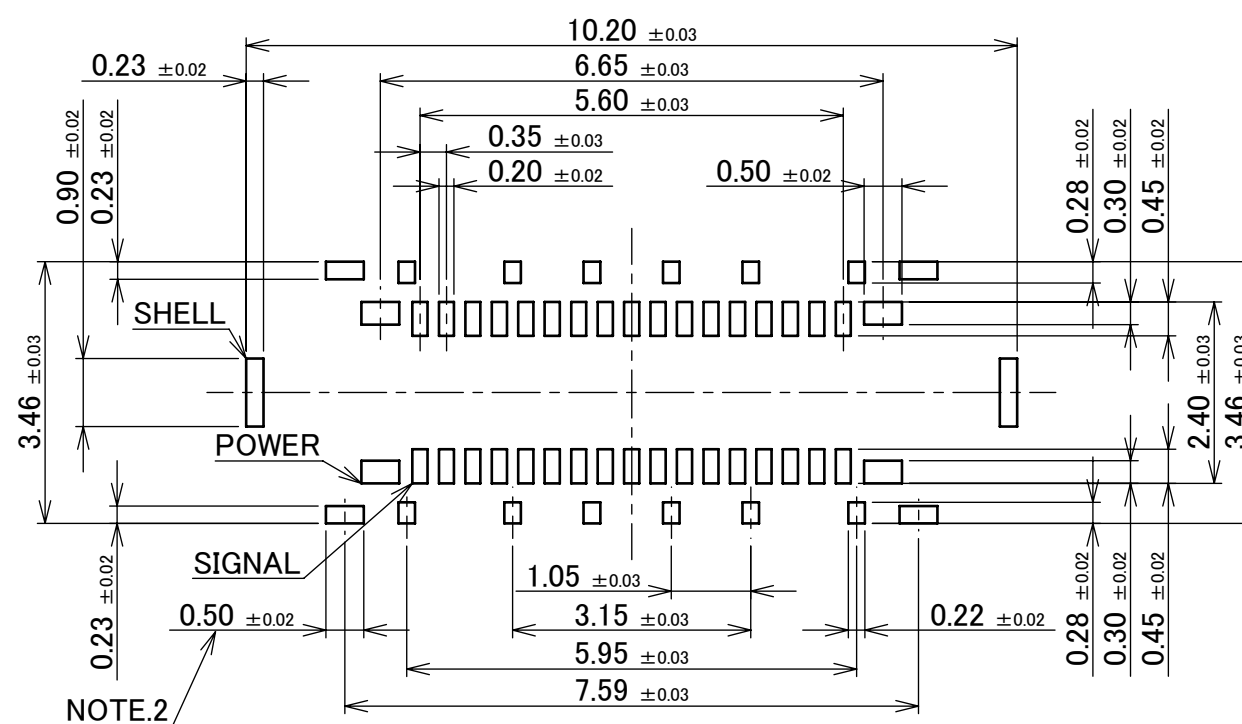


RECOMMENDED METAL MASK LAYOUT (34P)

THICKNESS : t=0.10mm


NOTES.

1. SOLDER RESIST SHALL BE COATED IN CASE OF RUNNING TRACES ON THIS FOOT PRINT PATTERN PROHIBITION AREA.
2. WHEN THE THICKNESS OF THE METAL MASK IS 0.12 mm, PLEASE SET IT TO 0.41 mm.


ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. R2	CUSTOMER COPY	
	6 MAX.	±0.2	30 OVER 120 MAX.				
GENERAL TOLERANCE.				TITLE		SCALE	I-PEX
DWG.	DATE			NOVASTACK® 35-HDP RECEPTACLE ASS'Y		10:1	
CHK.						UNIT mm	
APP.				DWG. No. 20698		SIZE A3	
						SHEET 4/8	

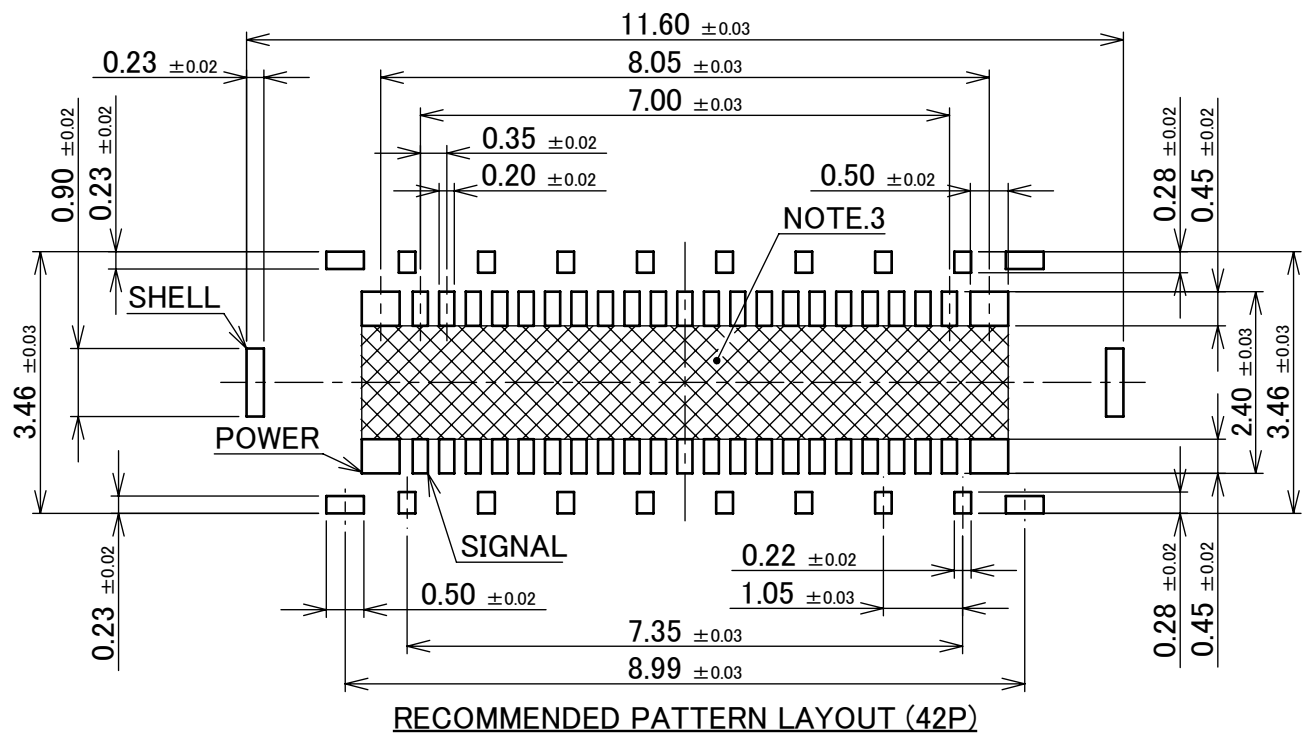


RECOMMENDED PATTERN LAYOUT (42P)

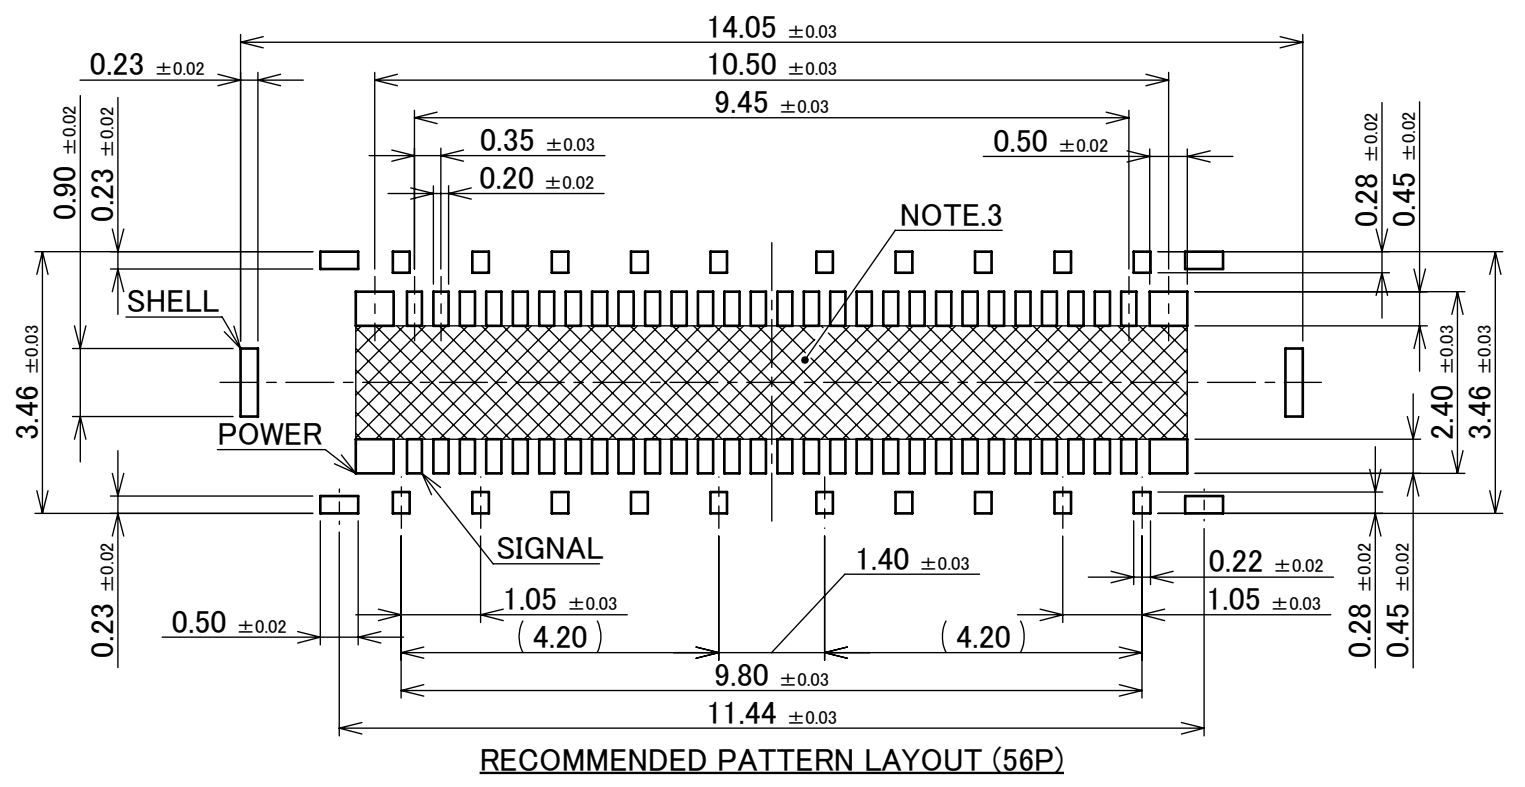

RECOMMENDED PATTERN LAYOUT (56P)

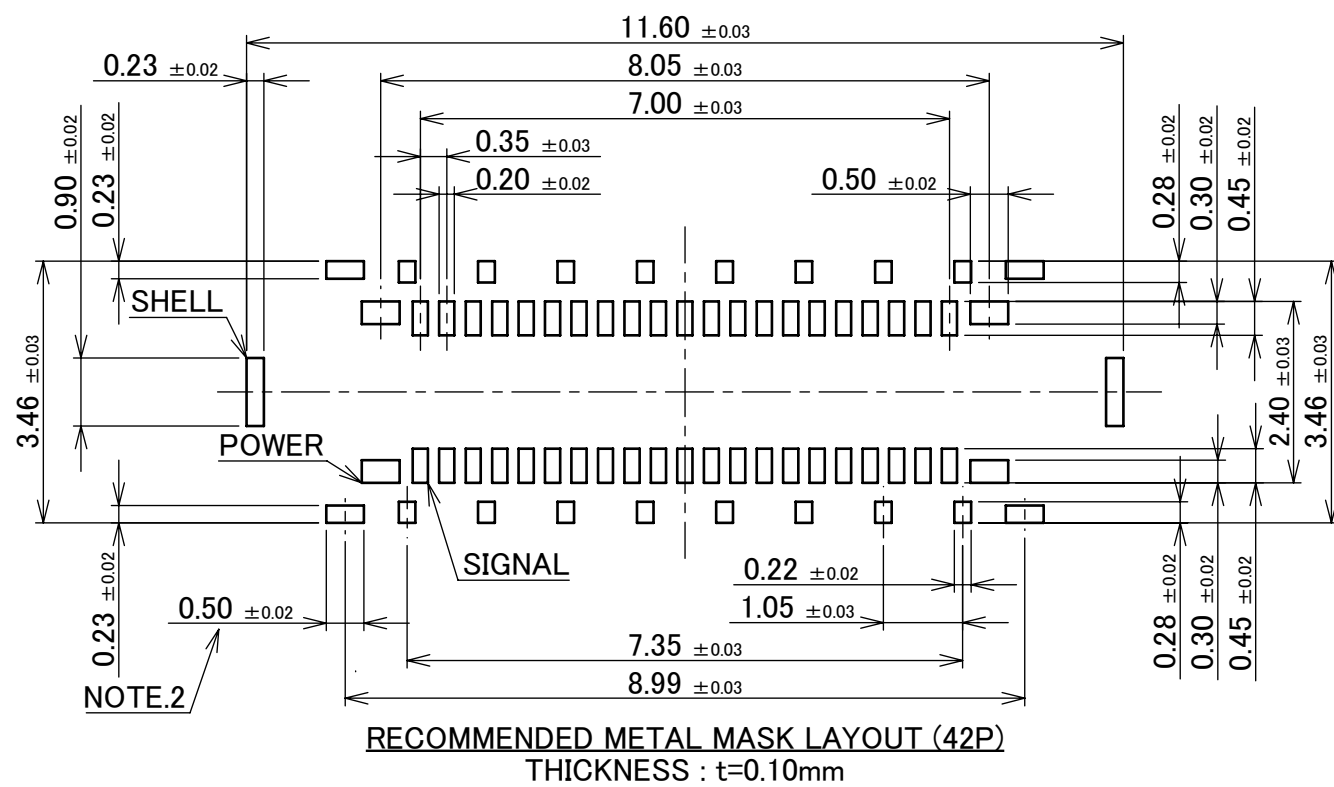

RECOMMENDED METAL MASK LAYOUT (42P)
THICKNESS : t=0.10mm



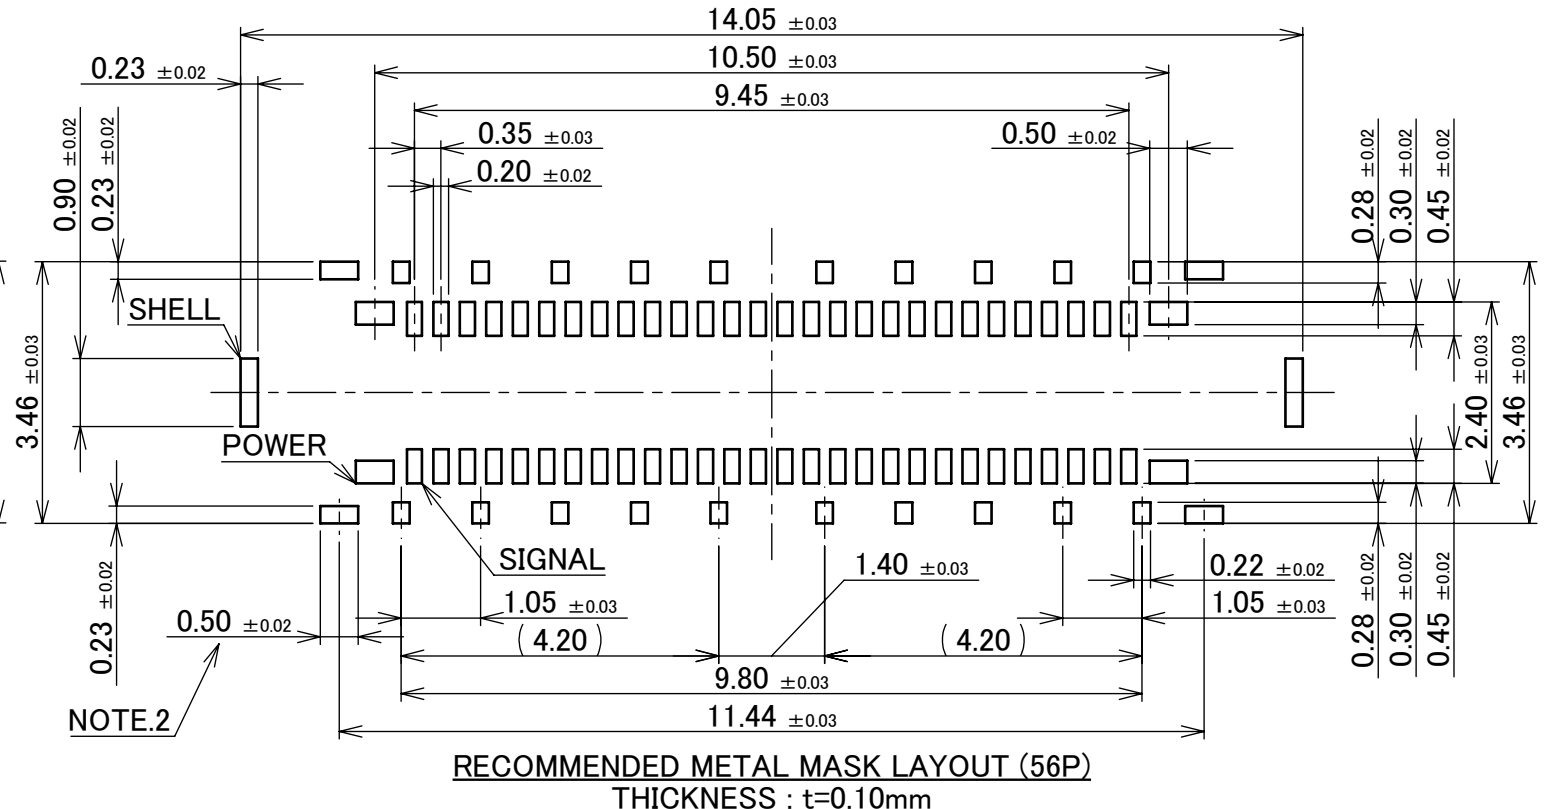


RECOMMENDED METAL MASK LAYOUT (56P)
THICKNESS : t=0.10mm

- NOTES.
 3. SOLDER RESIST SHALL BE COATED IN CASE OF RUNNING TRACES ON THIS FOOT PRINT PATTERNPROHIBITION AREA.
 4. WHEN THE THICKNESS OF THE METAL MASK IS 0.12 mm, PLEASE SET IT TO 0.41 mm.


ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. R2	CUSTOMER COPY	
	6 MAX.	±0.2	30 OVER 120 MAX.				
GENERAL TOLERANCE.				TITLE		SCALE	I-PEX
DWG.	DATE			NOVASTACK® 35-HDP RECEPTACLE ASS'Y		10:1	
CHK.						UNIT	
APP.						mm	
				DWG. No. 20698		SIZE	
						A3	SHEET 5/8 REV. 7

PART No.	SIGNAL POS.	POWER POS.	E
20698-028E-01	28P	4P	9.15
20698-034E-01	34P	4P	10.20
20698-042E-01#	42P	4P	11.60
20698-056E-01#	56P	4P	14.05
20698-062E-01#	62P	4P	15.10

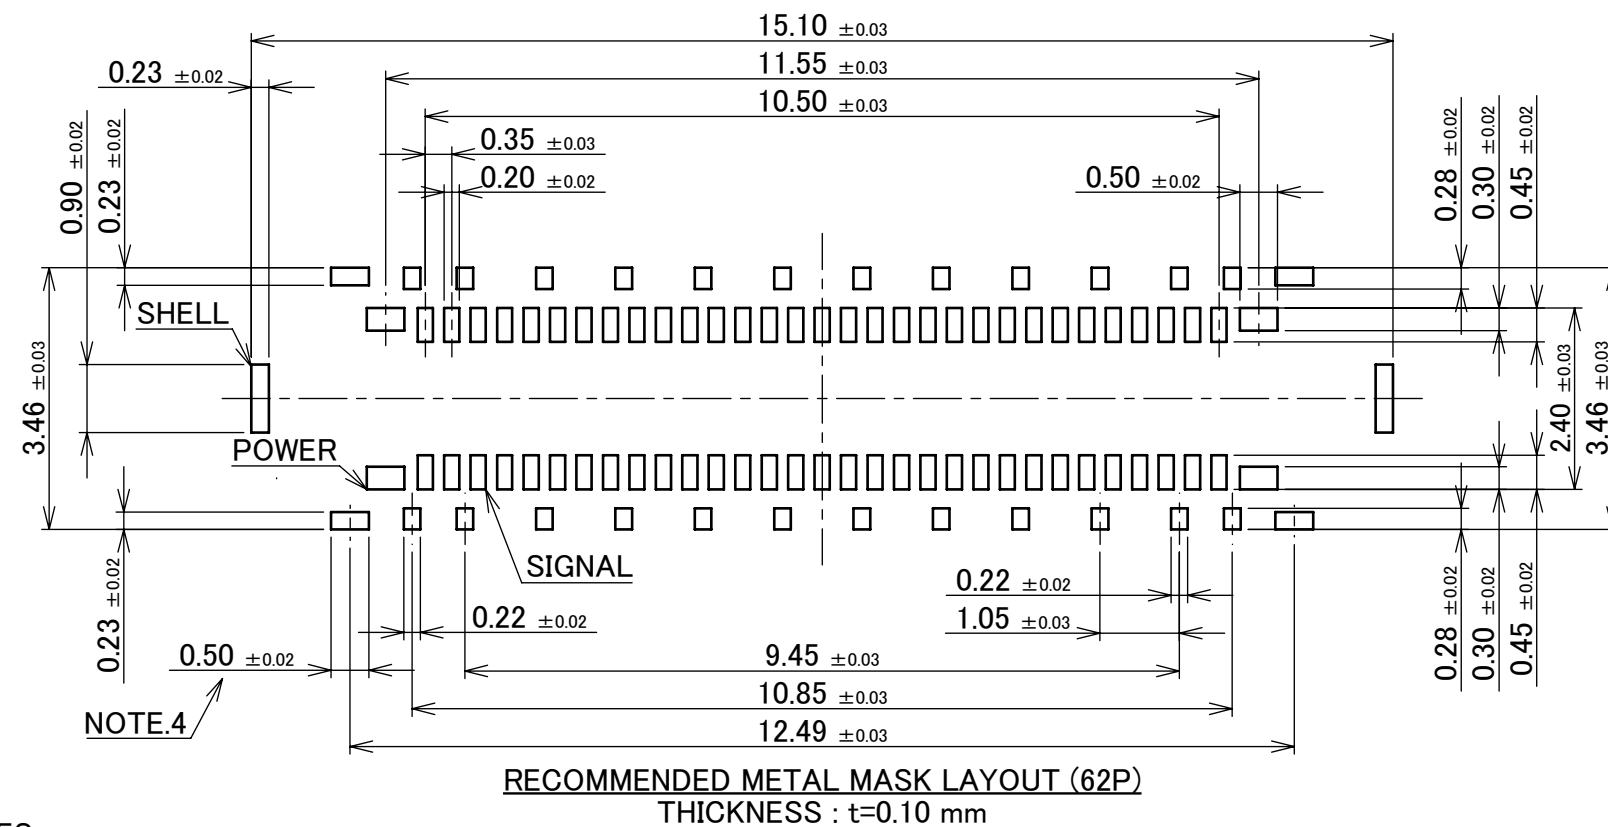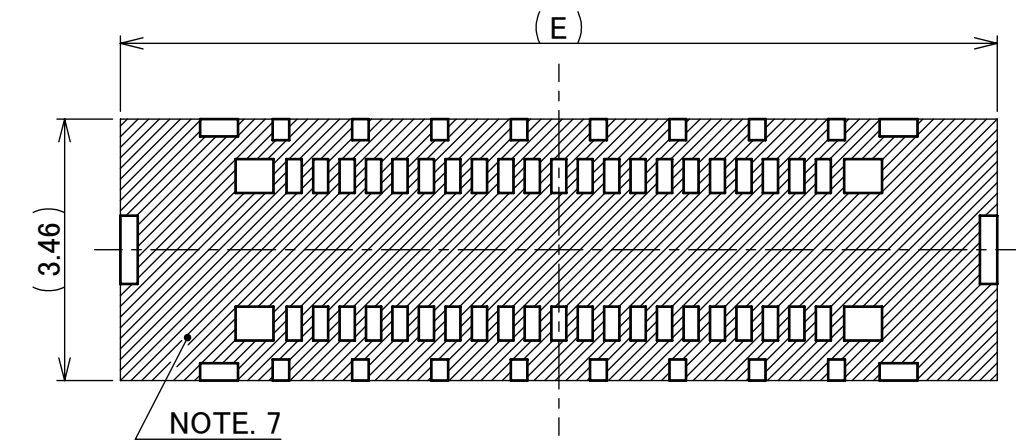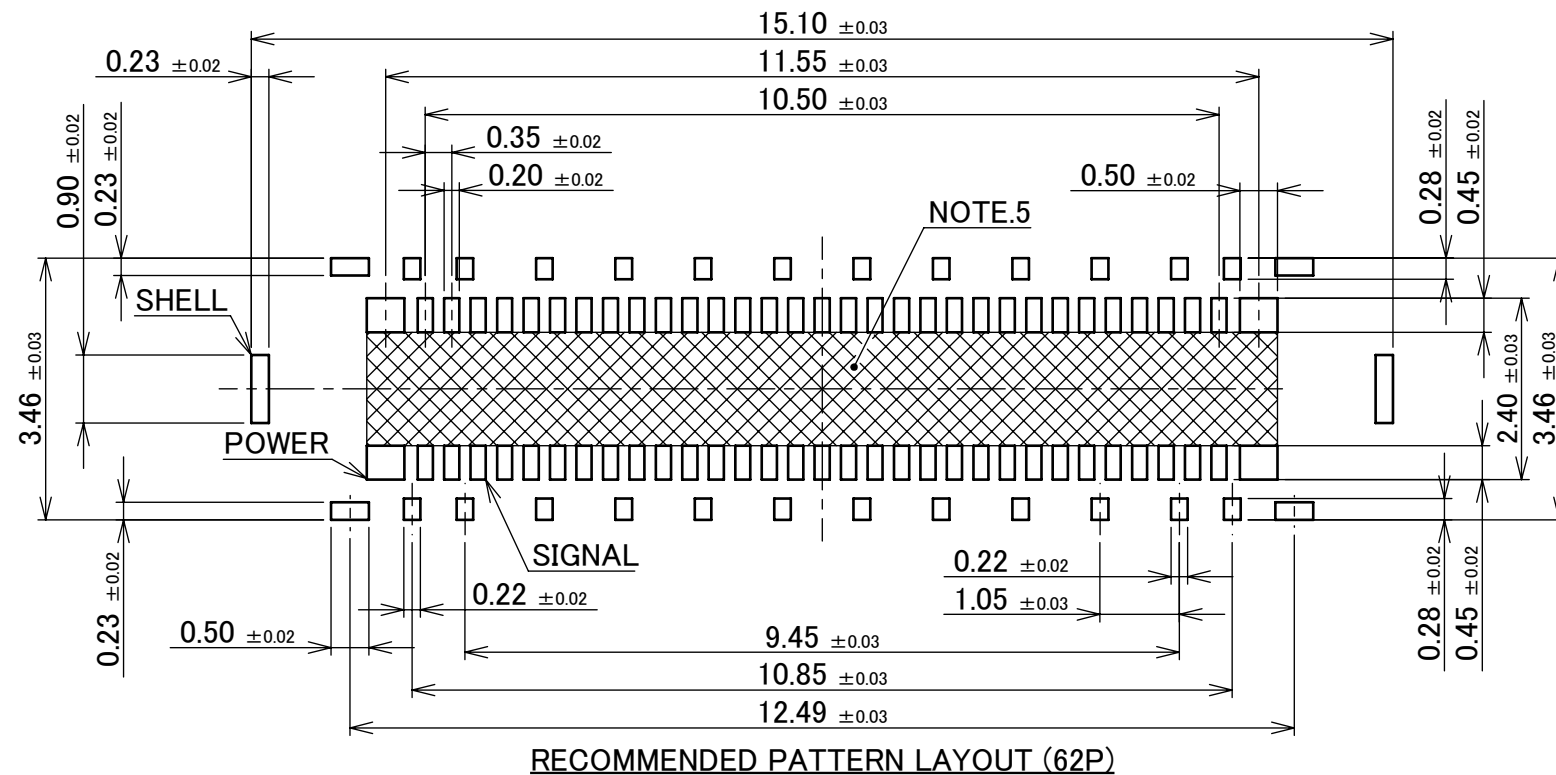


- NOTES.**
- SOLDER RESIST SHALL BE COATED IN CASE OF RUNNING TRACES ON THIS FOOT PRINT PATTERNPROHIBITION AREA.
 - WHEN THE THICKNESS OF THE METAL MASK IS 0.12 mm, PLEASE SET IT TO 0.41 mm.
 - THIS AREA CANNOT MOUNT ANOTHER COMPONENTS.

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. R2	CUSTOMER COPY
	6 MAX.	±0.2	30 OVER 120 MAX.			
GENERAL TOLERANCE.				TITLE NOVASTACK® 35-HDP RECEPTACLE ASS'Y	SCALE 10:1	UNIT mm
DWG.	DATE					
CHK.						
APP.						
				DWG. No.	20698	SIZE A3
				SHEET	6/8	REV. 7

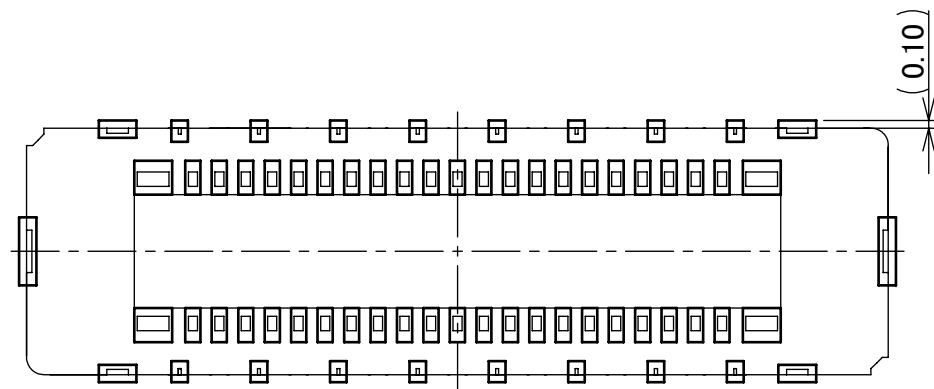




CONNECTOR ON RECOMMENDED FOOTPRINT PATTERN

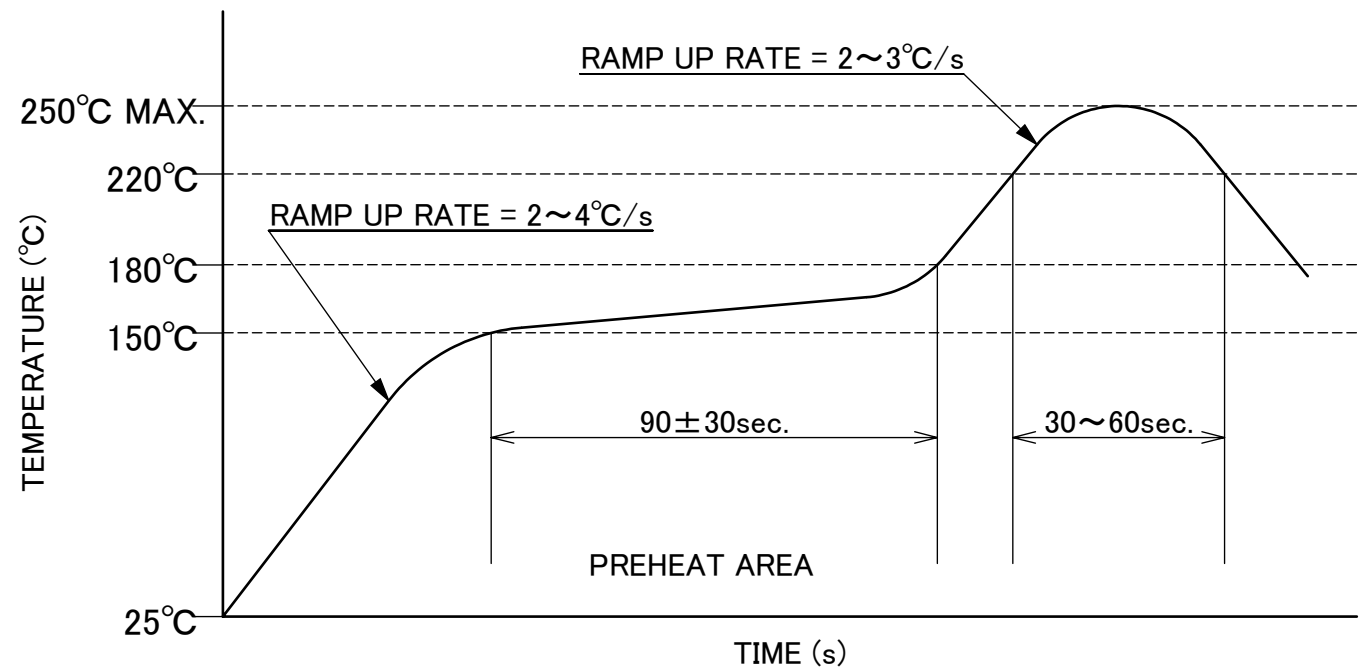

REFLOW TEMPERATURE PROFILE
 SENJU METAL INDUSTRY CO., LTD. : M705-SHF(Sn96.5 Ag3.0 Cu0.5)

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION 	SERIES No. R2	CUSTOMER COPY		
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5					
GENERAL TOLERANCE.				TITLE NOVASTACK® 35-HDP RECEPTACLE ASS'Y	SCALE 10:1	UNIT I-PEX		
DWG.	DATE							
CHK.								
APP.								
				DWG. No.	20698	SIZE A3	SHEET 7/8	REV. 7

PART NO.	Pos.	QTY. PER EMBOSS REEL (PIECES / REEL)	QTY. PER PACKING CARTON
20698-0**E-01	28P	10,000 / REEL	10,000 × 5 REELS = 50,000
	34P		
	42P		
	56P		
	62P		
20698-0**E-01M	42P	5,000 / REEL	5,000 × 5 REELS = 25,000
	56P		
	62P		

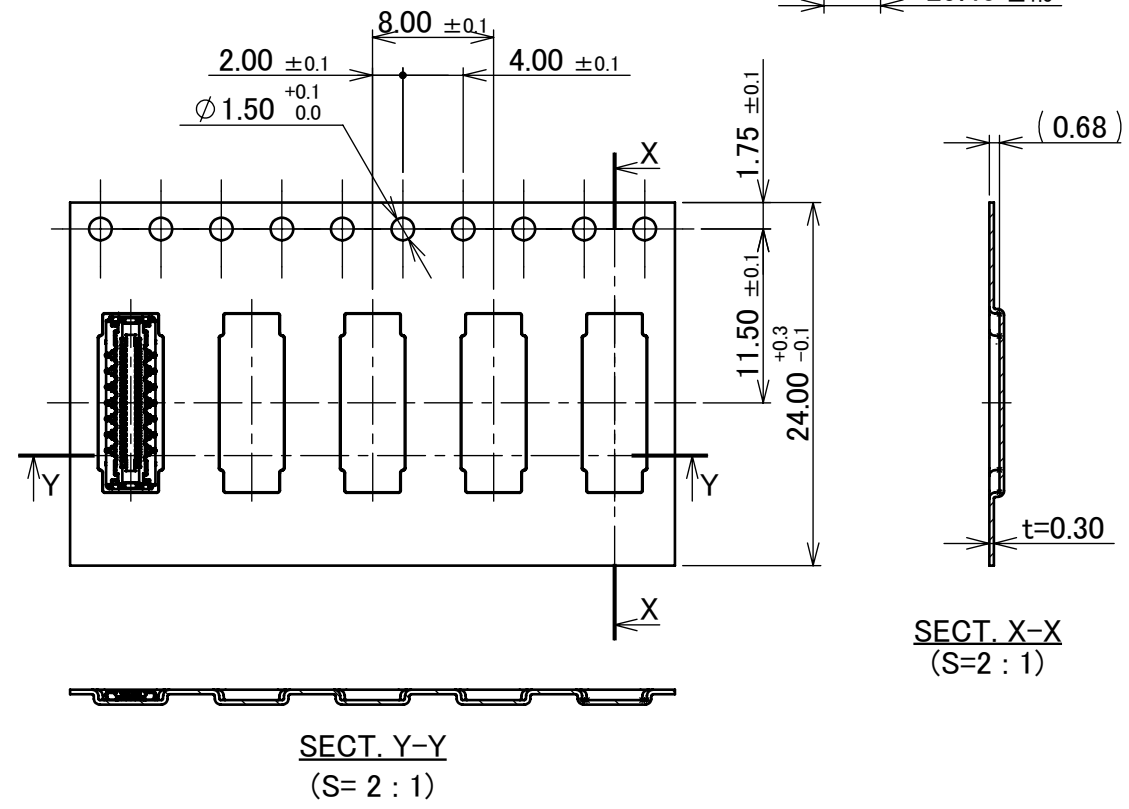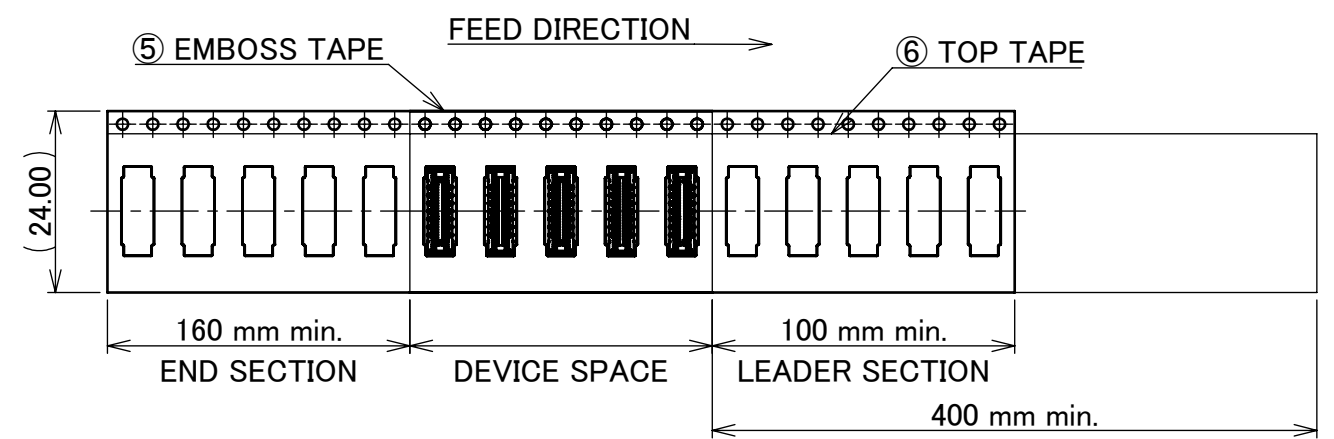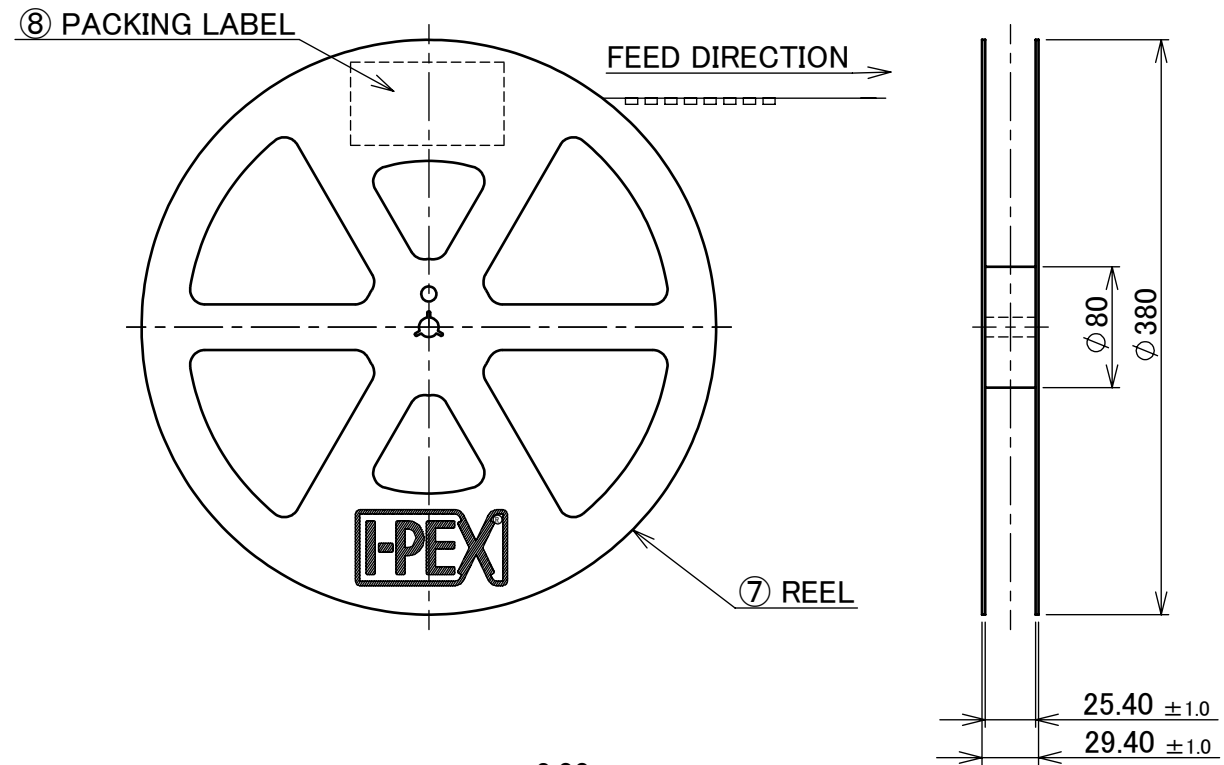

- NOTES.
- TAPING SPECIFICATION FOLLOWS JIS C 0806 (IEC 60286-3).
 - MAKE EMPTY SECTION OF LEADER AND END ON EACH END OF THE TAPE.
 - TOP TAPE SHALL NOT STICK OUT FROM EMBOSS TAPE.
 - TOP TAPE SHALL NOT COVER FEED HOLE.

NO.	DESCRIPTION	MATERIAL	FINISH, REMARKS
8	PACKING LABEL	-	-
7	REEL	PS	ANTI-STATIC TYPE BLACK
6	TOP TAPE	PET t=0.062 TRANSPARENCY	ANTI-STATIC TYPE
5	EMBOSS TAPE	PS TRANSPARENCY	ANTI-STATIC TYPE

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. R2	CUSTOMER COPY
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5			
GENERAL TOLERANCE.				TITLE	SCALE	I-PEX
DWG.	DATE			NOVASTACK® 35-HDP RECEPTACLE ASS'Y	X:1	
CHK.					UNIT mm	
APP.				DWG. No. 20698	SIZE A3	
					SHEET	8/8
					REV.	7